


# 1.5GHz Multilayer RadiEdge Antenna (for GPS)

Date: Sep/01/2011

## AH 316M157501

### Shapes

L= 3.2 ± 0.15 mm  
W= 1.6 ± 0.15 mm  
T= 0.5 ± 0.1 mm

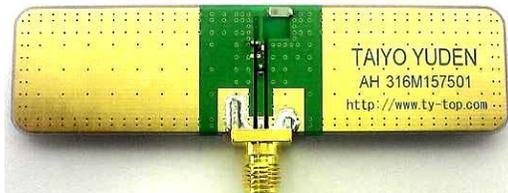

\*on Taiyo Yuden's Evaluation Board (80 x 20 mm)

\*antenna keep out area : 6 x 5 mm

### Feature

- \* Ultra Small
- \* Low Profile
- \* High Performance
- \* Small Keep-out Area
- \* Linear Polarization



### Actual data

Efficiency : -0.8dB (83%)  
Peak Gain : 2.4dBi @1575MHz  
-0.6dBic (circular polarization)  
Average Gain : 0.7dBi (ZX plane-Vertical polarization)  
-2.3dBic (ZX plane-RHCP)


### Electrical Characteristics

		linear polarization		circular polarization	
@1575MHz					
Efficiency [dB]		-0.8 (83%)			
Peak gain		2.4 [dBi]		-0.6 [dBic]	
Average gain	XY-plane	TX-H	-2.5	LC	-5.1
		TX-V	-12.5	RC	-5.1
	YZ-plane	TX-H	-1.7	LC	-4.7
		TX-V	-31.0	RC	-4.7
	ZX-plane	TX-H	-33.7	LC	-2.3
		TX-V	0.7	RC	-2.3


TX-H=Horizontal polarization  
TX-V=Vertical polarization

LC=Left-handed circular polarization  
RC=Right-handed circular polarization

### VSWR

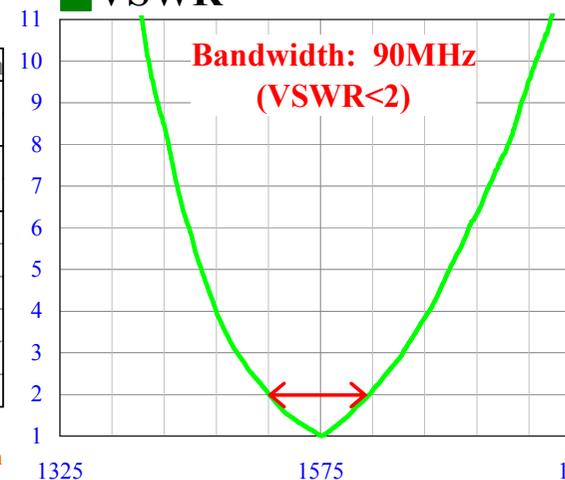

### Radiation Pattern

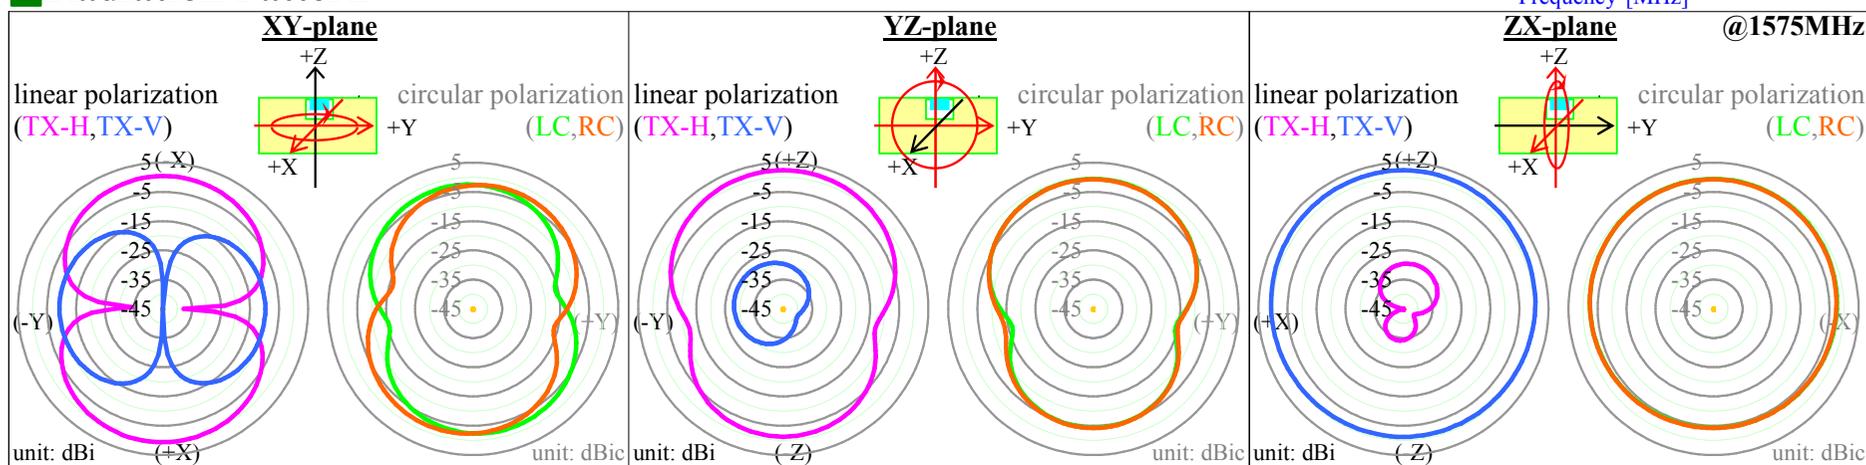

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.

TAIYO YUDEN reserves the right to make change to the Date at any time without notice.

Before making final selection, please check product specification