

MATERIALS AND FINISHES:

SMA JACK STR CONNECTOR:

BODY, CRIMP TUBE, JAM NUT: BRASS
PLATED GOLD

CENTER CONTACT: BERYLLIUM COPPER
PLATED GOLD

INSULATOR: TEFLON

LOCK WASHER: PHOSPHOR BRONZE
PLATED GOLD

CONNECTOR:

MHF® I LK

CABLE: 1.32MM CABLE BLACK




MATED HEIGHT: 2.90MM MAX

NOTES:

PACKAGING BY PLASTIC BAG

PERFORMANCE REQUIREMENTS:

1. FREQUENCY: DC~ 6GHz
2. IMPEDANCE: 50 OHMS
3. TEST 100% CONTINUITY
4. TEST 100% HI-POT: AC 350 V@0.5mA

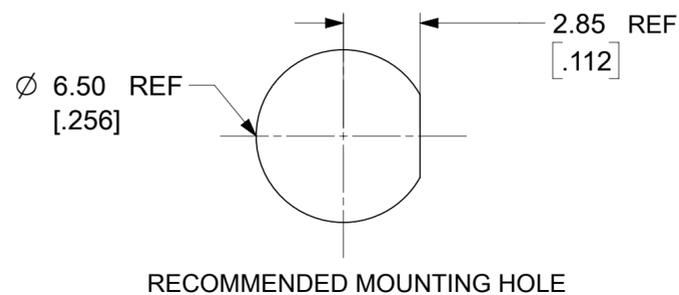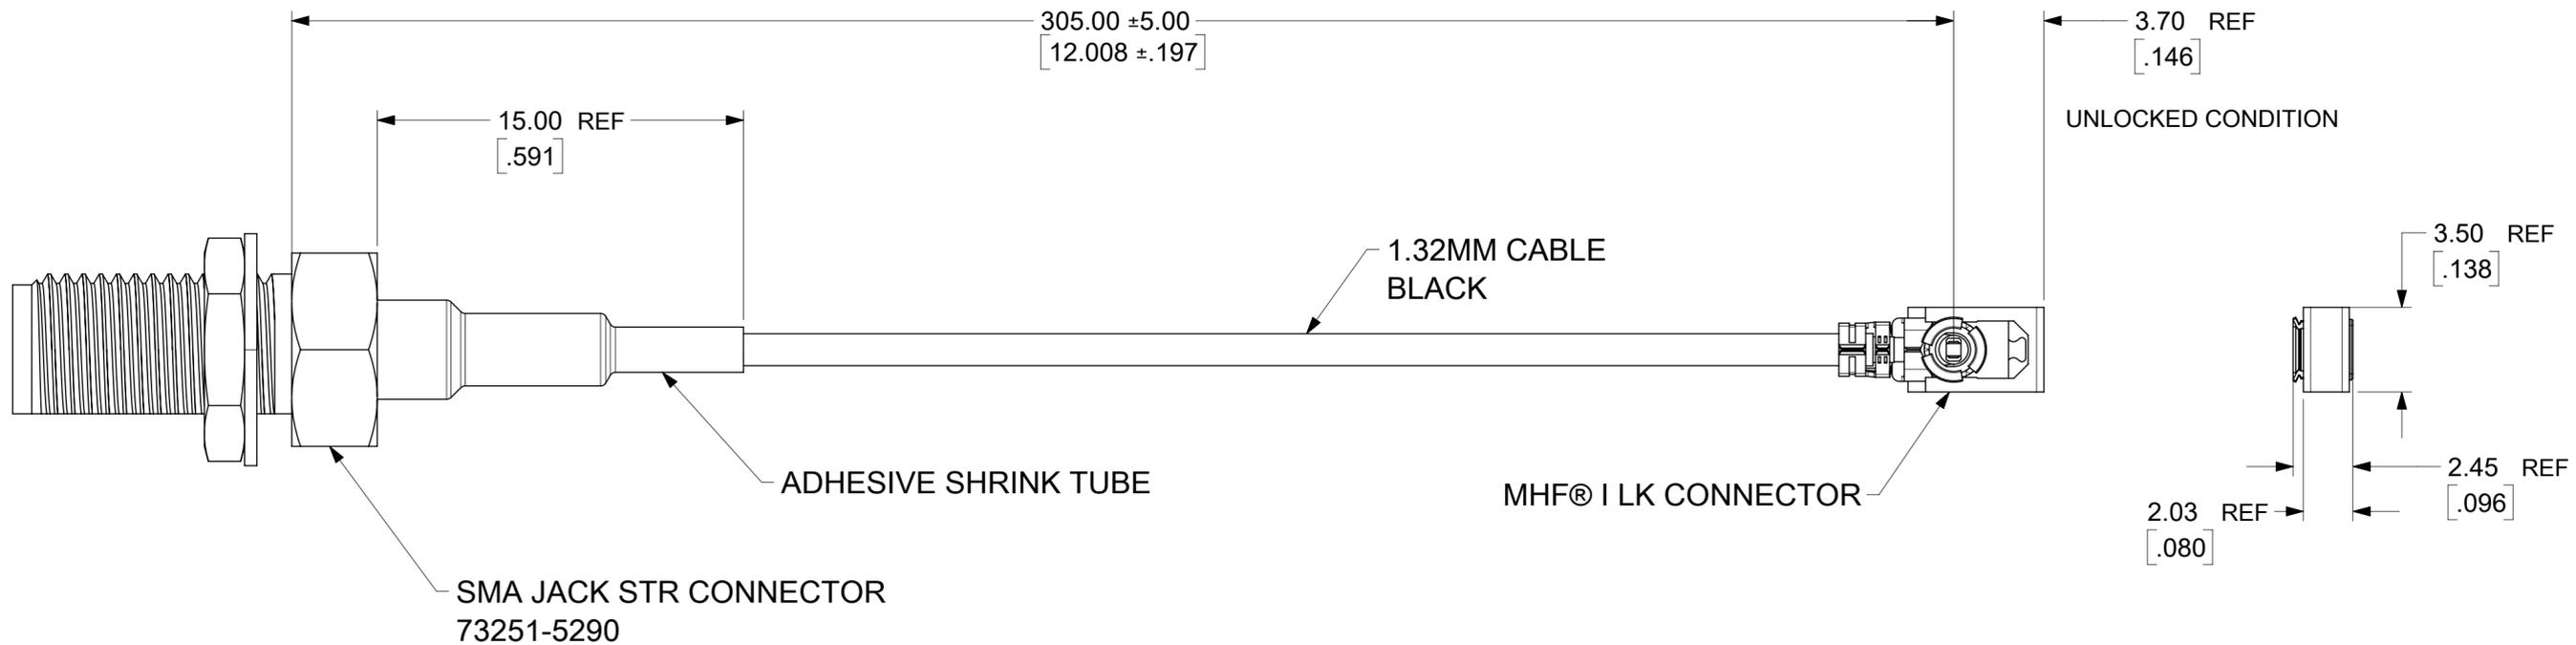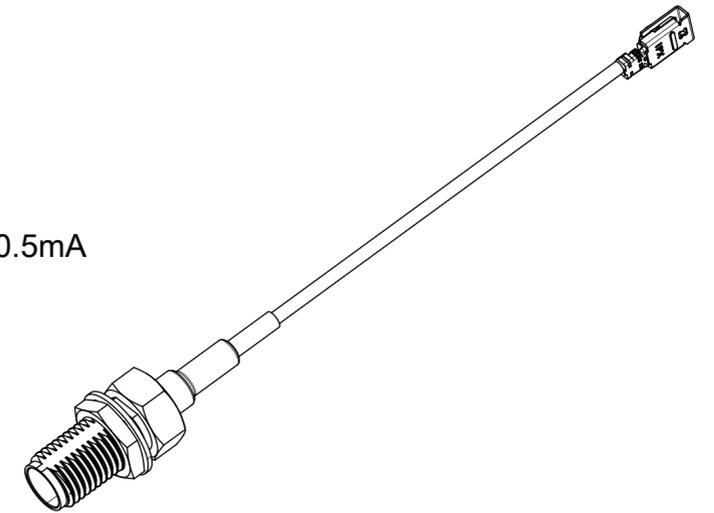

PART # 73230-6110

FUNCTIONAL SYMBOLS										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW RELEASE																							
mm		NTS		EC NO: 721426																							
GENERAL TOLERANCES (UNLESS SPECIFIED)										DRWN: JCHEN108 2022/07/07										CA,SMA JACK STR TO MHF® I LK WITH 1.32MM CABLE EWR#15293-A PRODUCT CUSTOMER DRAWING							
ANGULAR TOL ± °										CHK'D: MYLU07 2022/09/19																	
DIVISIONAL SYMBOLS										APPR: LCHEN03 2022/09/22										DOCUMENT NUMBER 732306110							
4 PLACES ±										INITIAL REVISION:																	
3 PLACES ±										DRWN: JCHEN108 2022/07/07										PSD		000		A			
2 PLACES ±										APPR: LCHEN03 2022/09/22										MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
1 PLACE ±										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										73230-6110		GENERAL MARKET		1 OF 1			
0 PLACES ±										THIRD ANGLE PROJECTION		DRAWING		SERIES		C-SIZE		73230									