

		DIMENSIONS						
No. OF PINS	UNITS	Α	В	С	D MAX	E		
9	inch	0.780	1.350	0.395	0.228	0.338		
	mm	19.81	34.29	10.03	5.79	8.59		
15	inch	0.932	1.367	0.360	0.284	0.338		
	mm	23.67	34.72	9.14	7.21	8.59		
25	inch	1.195	1.373	0.390	0.331	0.390		
	mm	30.35	34.87	9.91	8.41	9.91		

BACKSHELL KIT INCLUDES:

- 1 BACKSHELL (5)
- 1 ALIGNMENT SLEEVE (1)
- 1 COVER (2)
- 1 INSULATOR (MATING END) (3)
- 1 INSULATOR (REAR END) (4)
- 2 #2-56 THUMBSCREW (6)

MATERIAL:

BACKSHELL: THERMOPLASTIC

ALIGNMENT SLEEVE: STEEL, TIN PLATED

COVER: STEEL, TIN PLATED


INSULATOR (MATING END): THERMOPLASTIC INSULATOR (REAR END): THERMOPLASTIC

#2-56 THUMBSCREW: STEEL, NICKEL PLATED

MECHANICAL:

OPERATING TEMP: -10° C TO + 70° C MATING CYCLES: 300 CYCLES

MAXIMUM WIRE JACKET OD = 0.039"

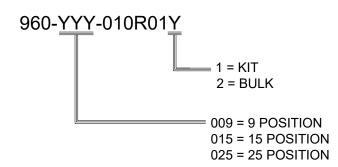

NOTE:

**NOT DESIGNED TO MATE WITH NORCOMP 580-M // 581-M SERIES CONNECTORS.
IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

ROHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF ADDAPATIC MATTER PROPERTY.

DRAWN:

M. SIGMON


DATE: 09/01/2011

NorComp

UNITS = "as indicated"

SCALE:		SHEET	OF	REV
MO 1	SU			

^{'G NO.} 960-YYY-010R01Y

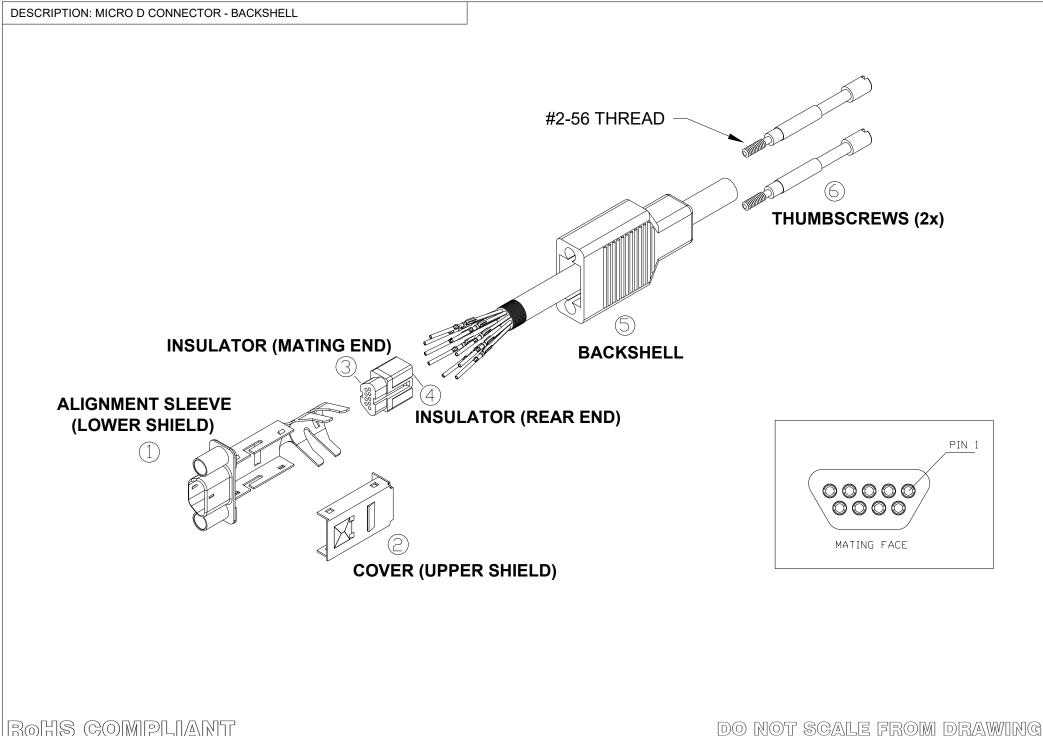

ROHS COMPLIANT

DRAWN:

M. SIGMON

DATE: 09/01/2011 NorComp

SCALE: REV SHEET 2 NTS

DWG NO. 960-YYY-010R01Y