



PROPRIETARY INFORMATION:  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 6976, DMR	08/26/05	DMR

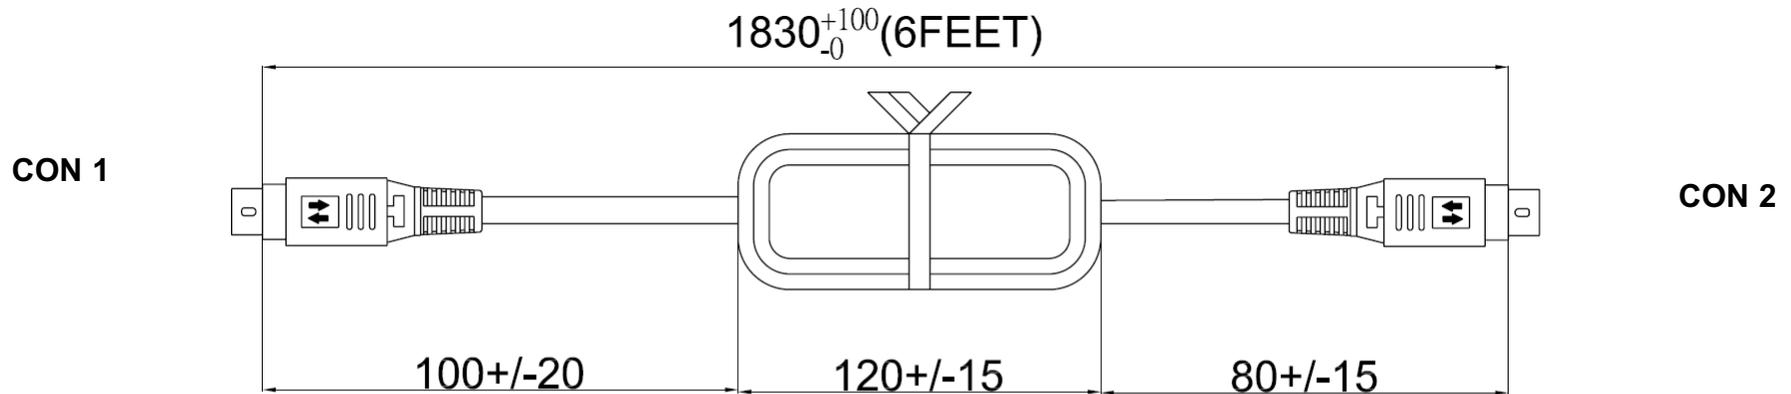

PIN OUT  
 PIN 1:PIN1  
 PIN 2:PIN2  
 PIN 3:PIN3  
 PIN 4:PIN4  
 SHIELD/SHELL:SHIELD/SHELL

FRONT VIEW

**GENERAL SPECIFICATIONS:**

CABLE TYPE / SIZE: UL 2464, 18 AWG, 4 CONDUCTORS+SHIELD  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 1830+100, -0 mm  
 CONNECTOR 1: KYCON KPP-4P or EQUIVALENT  
 CONNECTOR 2: KYCON KPP-4P or EQUIVALENT

**RELEASED**  
 By N.Frost at 10:00 am, Jan 17, 2018

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 <b>GlobTek, Inc.</b> 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 <b>www.globtek.com</b>
		<b>MILLIMETERS ANGULAR</b> .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR		DATE: 08/26/05	DWG TITLE: LOW VOLTAGE CORDSET	
DRAWN: NF		DATE: 08/26/05	FSCN No.: G, CC	SIZE A
APRVD: DMR		DATE: 08/26/05	SCALE: NONE	MODEL: N / A
			PART NO: <b>KPP424646FKPP4</b>	REV. A
				SHEET 1/1

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice