
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	1.06 R REF
Wire Size	800 kcmil	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	PANDUIT (#)
Wire Strip Length	3.0 in.	1.95±.04
Stud Size	5/8 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.88±.07 .66±.02 DIA
UL Temperature Rating	90°C	6.06±.09 ———
C.S.A Certified Wire Connector	Yes	2.5
Panduit Color Code on Barrel	ORANGE	
Panduit Die Index No.	P107	1





on Barrel

Alternate Industry Die Index No. () on Barrel

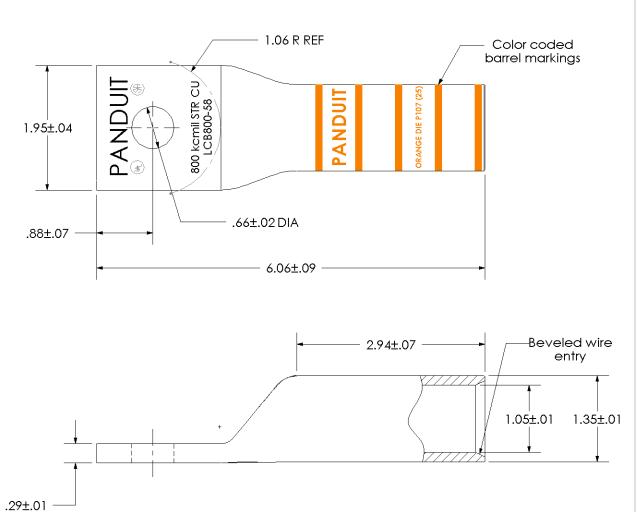

(25)

LISTED Wire Connector

						CORP. TINLEY PARK, ILLINO
						LCB800-58-6
00	7/02	SAB	DRL	RELEASED	10327	Copper Lug - One-Hole, Long Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCB800-58-CUST