



Converter - Brake - Inverter Module

NPT IGBT

Single Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 600 \text{ V}$	$V_{CES} = 600 \text{ V}$
$I_{DAVM25} = 90 \text{ A}$	$I_{C25} = 23 \text{ A}$	$I_{C25} = 23 \text{ A}$
$I_{FSM} = 270 \text{ A}$	$V_{CE(sat)} = 2.1 \text{ V}$	$V_{CE(sat)} = 2.1 \text{ V}$

Part name (Marking on product)

MIAA15WB600TMH

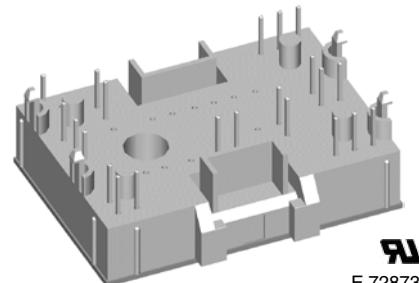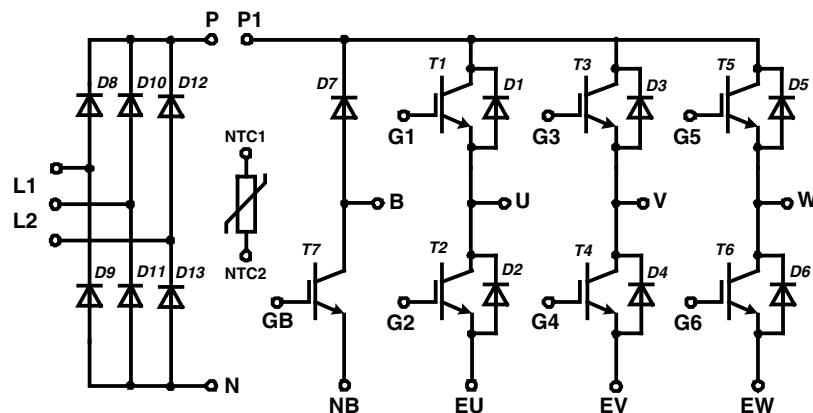

Pin configuration see outlines.

Features:

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with NPT IGBTs
 - low saturation voltage
 - positive temperature coefficient
 - fast switching
 - short tail current
- Epitaxial free wheeling diodes with hiperfast soft reverse recovery
- Temperature sense included

Application:

- AC motor drives
- Pumps, Fans
- Washing machines
- Air-conditioning system
- Inverter and power supplies

Package:

- "Mini" package
- Assembly height is 17 mm
- Insulated base plate
- Pins suitable for wave soldering and PCB mounting
- Assembly clips available
 - IXKU 5-505 screw clamp
 - IXRB 5-506 click clamp
- UL registered E72873

Output Inverter T1 - T6

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage	$T_{VJ} = 150^\circ\text{C}$			600	V
V_{GES}	max. DC gate voltage	continuous			± 20	V
V_{GEM}	max. transient collector gate voltage	transient			± 30	V
I_{C25}	collector current	$T_C = 25^\circ\text{C}$			23	A
I_{C80}		$T_C = 80^\circ\text{C}$			16	A
P_{tot}	total power dissipation	$T_C = 25^\circ\text{C}$			80	W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 15 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$	2.1	2.5	V
			$T_{VJ} = 125^\circ\text{C}$	2.3		V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.4 \text{ A}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	4.5	5.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$		0.6	mA
			$T_{VJ} = 125^\circ\text{C}$		1.0	mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20 \text{ V}$			150	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$			700	pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 300 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 15 \text{ A}$			57	nC
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 25^\circ\text{C}$ $V_{CE} = 300 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega$			40	ns
t_r	current rise time				45	ns
$t_{d(off)}$	turn-off delay time				155	ns
t_f	current fall time				95	ns
E_{on}	turn-on energy per pulse				0.35	mJ
E_{off}	turn-off energy per pulse				0.27	mJ
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 300 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega$			40	ns
t_r	current rise time				45	ns
$t_{d(off)}$	turn-off delay time				160	ns
t_f	current fall time				120	ns
E_{on}	turn-on energy per pulse				0.55	mJ
E_{off}	turn-off energy per pulse				0.4	mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega; I_C = 30 \text{ A}$	$T_{VJ} = 125^\circ\text{C}$	$V_{CEK} \leq V_{CES} \cdot L_S \cdot d_I / dt$		V
I_{sc} (SCSOA)	short circuit safe operating area	$V_{CE} = 360 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega; t_p = 10 \mu\text{s}$	$T_{VJ} = 125^\circ\text{C}$	65		A
R_{thJC}	thermal resistance junction to case	(per IGBT)			1.6	K/W
R_{thCH}	thermal resistance case to heatsink				0.55	K/W

Output Inverter D1 - D6

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 150^\circ\text{C}$			600	V
I_{F25}	forward current	$T_C = 25^\circ\text{C}$			37	A
I_{F80}		$T_C = 80^\circ\text{C}$			24	A
V_F	forward voltage	$I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$	1.8	2.1	V
			$T_{VJ} = 125^\circ\text{C}$	1.3		V
Q_{rr}	reverse recovery charge	$T_{VJ} = 125^\circ\text{C}$ $V_R = 300 \text{ V}$ $di_F/dt = -380 \text{ A}/\mu\text{s}$ $I_F = 15 \text{ A}; V_{GE} = 0 \text{ V}$			0.58	μC
I_{RM}	max. reverse recovery current				11.5	A
t_{rr}	reverse recovery time				115	ns
E_{rec}	reverse recovery energy				50	μJ
R_{thJC}	thermal resistance junction to case	(per diode)			1.6	K/W
R_{thCH}	thermal resistance case to heatsink				0.55	K/W

 $T_C = 25^\circ\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20070413a

Brake T7

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{CES}	collector emitter voltage		$T_{VJ} = 150^\circ\text{C}$		600	V
V_{GES}	max. DC gate voltage	continuous			± 20	V
V_{GEM}	max. transient collector gate voltage	transient			± 30	V
I_{C25}	collector current	$T_C = 25^\circ\text{C}$		23	A	
I_{C80}		$T_C = 80^\circ\text{C}$		16	A	
P_{tot}	total power dissipation	$T_C = 25^\circ\text{C}$		80	W	
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 15 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.1 2.3	2.5	V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 0.4 \text{ A}; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ\text{C}$	4.5	5.5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.5	mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20 \text{ V}$			150	nA
C_{ies}	input capacitance	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$		700		pF
$Q_{G(on)}$	total gate charge	$V_{CE} = 300 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 15 \text{ A}$		57		nC
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 25^\circ\text{C}$ $V_{CE} = 300 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega$		40		ns
t_r	current rise time			45		ns
$t_{d(off)}$	turn-off delay time			155		ns
t_f	current fall time			95		ns
E_{on}	turn-on energy per pulse			0.35		mJ
E_{off}	turn-off energy per pulse			0.27		mJ
$t_{d(on)}$	turn-on delay time	$T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 300 \text{ V}; I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega$		40		ns
t_r	current rise time			45		ns
$t_{d(off)}$	turn-off delay time			160		ns
t_f	current fall time			120		ns
E_{on}	turn-on energy per pulse			0.55		mJ
E_{off}	turn-off energy per pulse			0.4		mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega; I_C = 30 \text{ A}$	$T_{VJ} = 125^\circ\text{C}$	$V_{CEK} \leq V_{CES} \cdot L_S \cdot d_I / dt$		V
I_{sc} (SCSOA)	short circuit safe operating area	$V_{CE} = 360 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 68 \Omega; t_p = 10 \mu\text{s}$	$T_{VJ} = 125^\circ\text{C}$	65		A
R_{thJC}	thermal resistance junction to case	(per IGBT)			1.6	K/W
R_{thCH}	thermal resistance case to heatsink			0.55		K/W

Brake Chopper D7

Ratings

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage		$T_{VJ} = 150^\circ\text{C}$		600	V
I_{F25}	forward current		$T_C = 25^\circ\text{C}$		22	A
I_{F80}			$T_C = 80^\circ\text{C}$		14	A
V_F	forward voltage	$I_F = 10 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.7 1.4	2.2	V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.2	0.1	mA
Q_{rr}	reverse recovery charge	$V_R = 300 \text{ V}$ $di_F/dt = -300 \text{ A}/\mu\text{s}$ $I_F = 10 \text{ A}; V_{GE} = 0 \text{ V}$		0.3		μC
I_{RM}	max. reverse recovery current			8.8		A
t_{rr}	reverse recovery time			95		ns
E_{rec}	reverse recovery energy			22		μJ
R_{thJC}	thermal resistance junction to case	(per diode)			2.5	K/W
R_{thCH}	thermal resistance case to heatsink			0.85		K/W

 $T_C = 25^\circ\text{C}$ unless otherwise stated

IXYS reserves the right to change limits, test conditions and dimensions.

20070413a

Input Rectifier Bridge D8 - D11**Ratings**


Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V_{RRM}	max. repetitive reverse voltage		T _{VJ} = 25°C		1600	V
I_{FAV}	average forward current	sine 180°	T _C = 80°C		22	A
I_{DAVM}	max. average DC output current	rect.; d = 1/3	T _C = 80°C		62	A
I_{FSM}	max. forward surge current	t = 10 ms; sine 50 Hz	T _{VJ} = 25°C T _{VJ} = 125°C		270 tbd	A A
I²t	I ² t value for fusing	t = 10 ms; sine 50 Hz	T _{VJ} = 25°C T _{VJ} = 125°C		365 tbd	A ² s A ² s
P_{tot}	total power dissipation		T _C = 25°C		50	W
V_F	forward voltage	I _F = 30 A	T _{VJ} = 25°C T _{VJ} = 125°C	1.35 1.35	1.6	V V
I_R	reverse current	V _R = V _{RRM}	T _{VJ} = 25°C T _{VJ} = 125°C	0.01 0.3	mA mA	
R_{thJC}	thermal resistance junction to case	(per diode)			2.1	K/W
R_{thCH}	thermal resistance case to heatsink	(per diode)			0.7	K/W

Temperature Sensor NTC**Ratings**

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
R₂₅	resistance		T _C = 25°C	4.75	5.0 3375	kΩ K
B_{25/50}						

Module**Ratings**

Symbol	Definitions	Conditions	min.	typ.	max.	Unit
T_{VJ}	operating temperature		-40		125	°C
T_{VJM}	max. virtual junction temperature				150	°C
T_{stg}	storage temperature		-40		125	°C
V_{ISOL}	isolation voltage	I _{ISOL} ≤ 1 mA; 50/60 Hz			2500	V~
CTI	comparative tracking index			-		
F_c	mounting force		40		80	N
d_s	creep distance on surface		12.7			mm
d_A	strike distance through air		12			mm
Weight				35		g

Equivalent Circuits for Simulation**Ratings**


Symbol	Definitions	Conditions	min.	typ.	max.	Unit
V₀	rectifier diode	D8 - D13	T _{VJ} = 125°C	0.9 16		V mΩ
R₀						
V₀	IGBT	T1 - T6	T _{VJ} = 125°C	1.15 77		V mΩ
R₀						
V₀	free wheeling diode	D1 - D6	T _{VJ} = 125°C	1.05 30		V mΩ
R₀						
V₀	IGBT	T7	T _{VJ} = 125°C	1.15 77		V mΩ
R₀						
V₀	free wheeling diode	D7	T _{VJ} = 125°C	1.05 35		V mΩ
R₀						

IXYS reserves the right to change limits, test conditions and dimensions.

T_C = 25°C unless otherwise stated



20070413a

Circuit Diagram

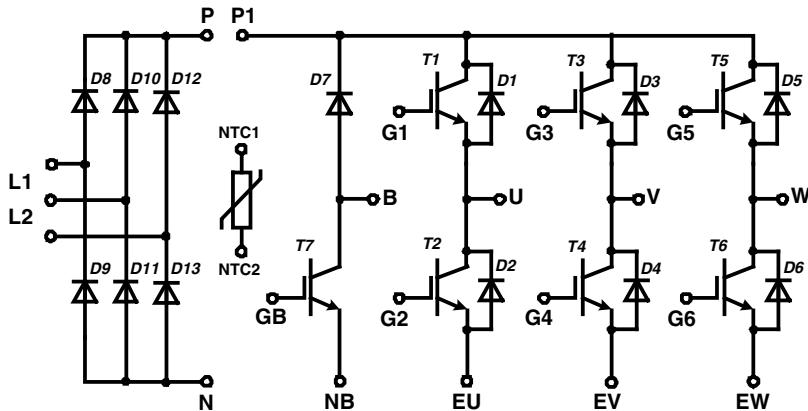


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

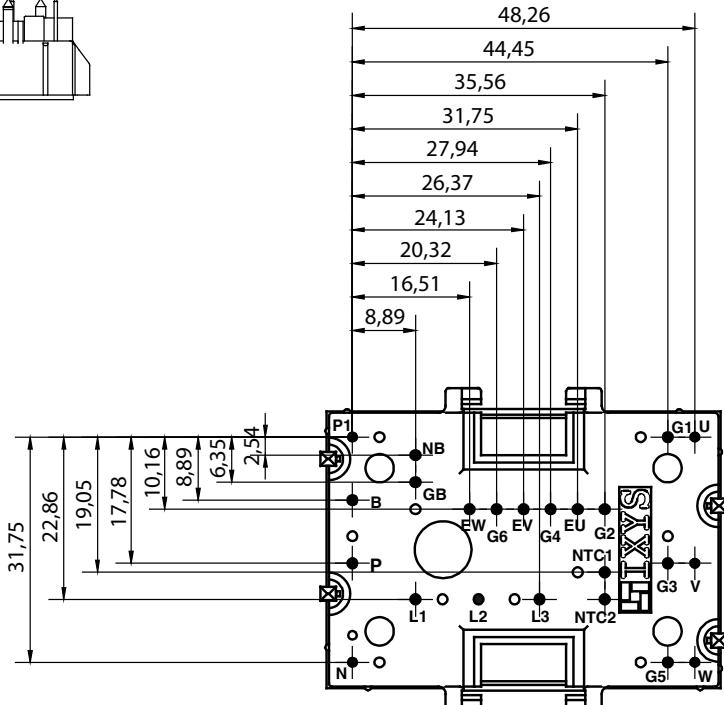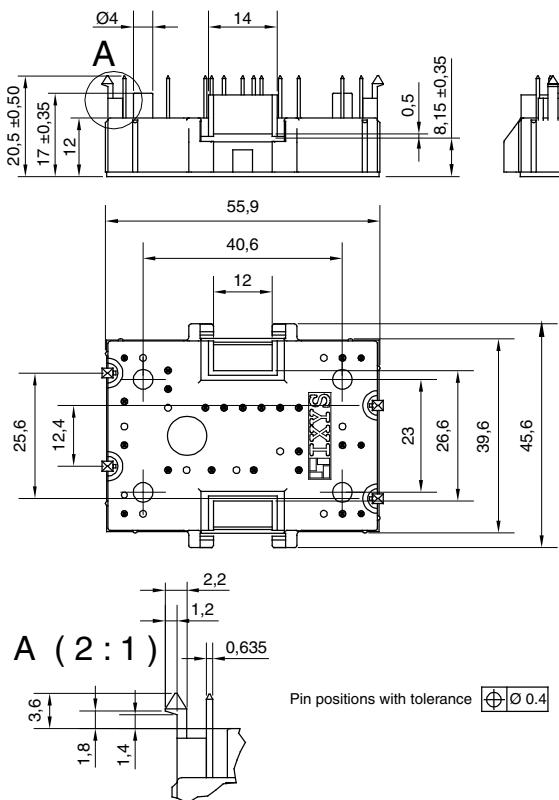




Product Marking




Part number

M = Module
 I = IGBT
 A = IGBT (NPT)
 A = Gen 1 / std
 15 = Current Rating [A]
 WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
 600 = Reverse Voltage [V]
 T = NTC
 MH = MiniPack2

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MIAA 15 WB 600 TMH	MIAA15WB600TMH	Box	20	503757

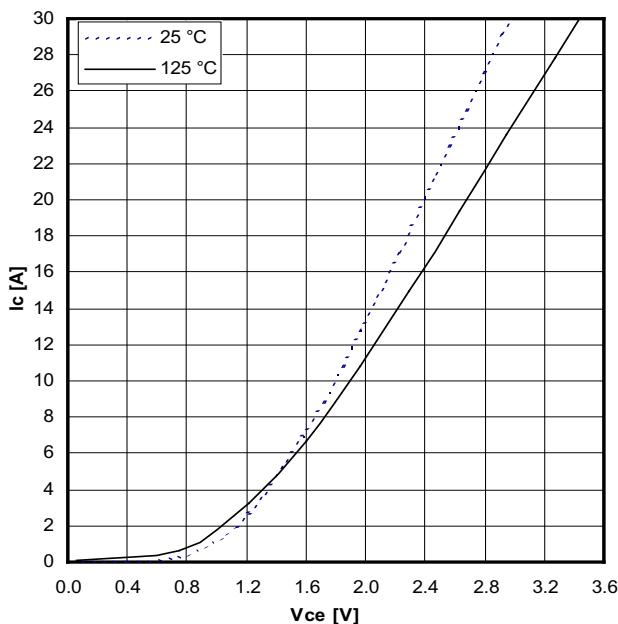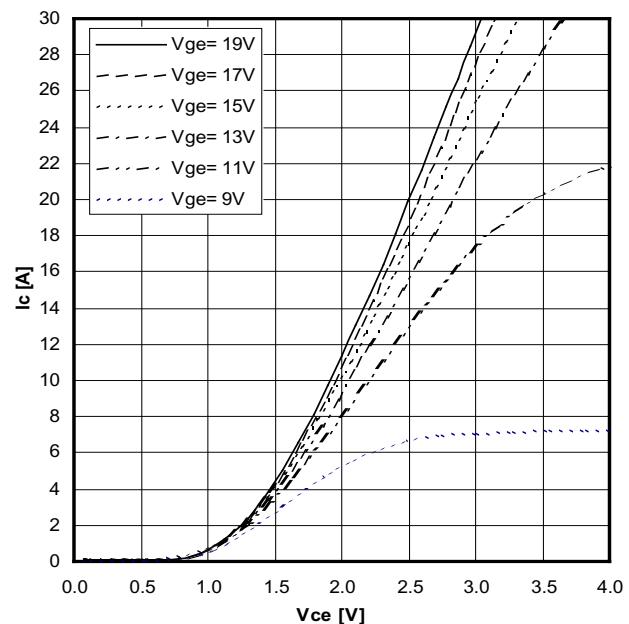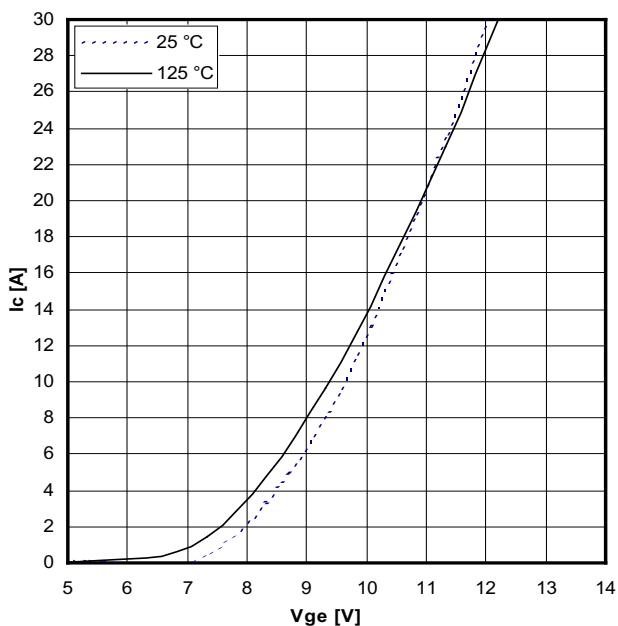Typical output characteristics, $V_{GE} = 15\text{ V}$ Typical output characteristics ($125\text{ }^\circ\text{C}$)

Typical transfer characteristics

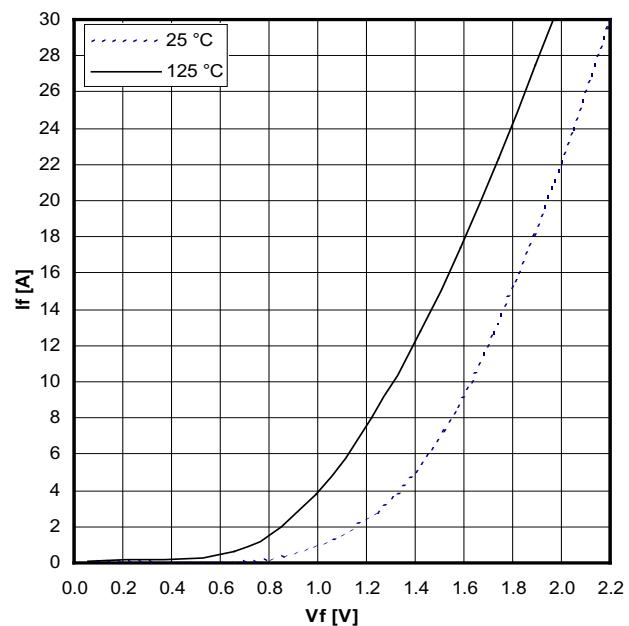

Typical forward characteristics of freewheeling diode

