
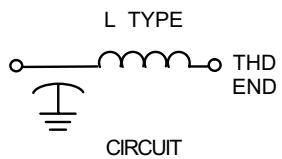
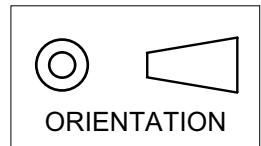


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

**Electrical Testing
per Tucsonix standard
test plans and Mil-Std-202
Test Methods.**

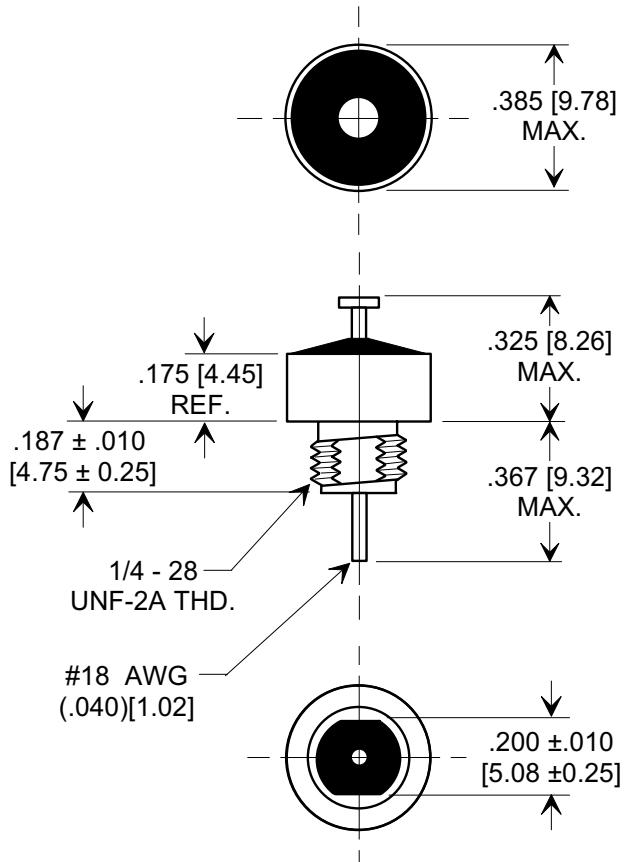


NOTES:

1. TUSONIX STANDARD PART NUMBER: 4600-053.
TUSONIX RoHS COMPLIANT PART NUMBER: 4600-053 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS
PART NUMBER WHEN ORDERING.
 2. MATERIALS:
BUSHING - TIN PLATED STEEL.
LEAD STANDARD PART; SOLDER PLATED COPPER.
RoHS PART; SILVER PLATED COPPER.
NUT - TIN PLATED BRASS.
L"WASHER - TIN PLATED PHOSPHOR BRONZE.
 3. PART MARKING: TRADEMARK AND VARIATION NUMBER.
STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
 4. MOUNTING TORQUE: 8 lb - ins. max.
 5. DCR - $.01\Omega$ max.
 6. MAX SOLDER TEMPFRATURF 500°F

MOUNTING HARDWARE



LOCK WASHER

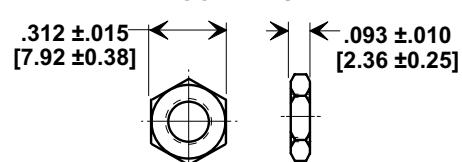

HEX NUT

MIN. Cx (μ F)	WVDC		CURRENT DC (AMPS)	D.W.V. (VDC)	I.R. MIN.	MIN. NO LOAD INSERTION LOSS (dB) PER MIL-STD 220 @ +25°C						TEMP. CHARA.
	85°C	125°C				30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1GHz	
1.4	80	50	15	300	500 M Ω	15	25	34	44	60	70	X7R

X-2015 Rev-0		REVISION RECORD							
Original Release C.O.	930129-1	0							
-066 ADDED 0-400 TO 125°C. S.M. 11-18-97									
1997111-9-03	4								
REVISED DWG & DRAWING MADE FOR EACH VAR. S.M. 08-19-02									
20020819-3-01	5								
REVISED & ADDED NOTES. S.M. 01-05-06									
20060104-3-01	6								
<p style="text-align: center;">--TOLERANCES-- Unless Otherwise Specified</p> <table border="0"> <tr> <td>DECIMAL ±</td> <td></td> </tr> <tr> <td>ANGLES ±</td> <td></td> </tr> </table>						DECIMAL ±		ANGLES ±	
DECIMAL ±									
ANGLES ±									
		Title		COAXIAL BROADBAND - "L"					
		Drawn S.M. 08-19-02		Scale 2 X					
		Approved B.Mc. 08-19-02							
		TUSONIX TUCSON, ARIZONA	A	4600-053					