

KAE-02150 Image Sensor Evaluation Kit

Description

ON Semiconductor KAE-02150 Image Sensor Evaluation Kit enables customers to easily and quickly evaluate the performance of the KAE-02150 and KAE-02152 Interline Transfer EMCCD Image Sensors without the need to develop a full camera design. When combined with ON Semiconductor Sensor Studio II software, this hardware allows easy camera control such as VGA/CDS gains, black levels, Integration time, electron multiplication factor and readout configuration (single dual quad). Image capture and analysis functions such as video recording, still image capture, gain merging algorithm and image analysis are also supported.

Features

- Compatible with KAE-02150 and KAE-02152 Interline Transfer EMCCD Image Sensors
- Kit Includes Monochrome KAE-02150 Image Sensor
- ADDI7015 Analog Front End
- Three Operating Modes Supported:
 - ◆ Normal: All Signal Routed to Standard CCD Output
 - ◆ EM: All Charge Routed to Electron Multiplication Output
 - ◆ Mixed: Intra-scene Switchable Gain Routes Charge Based on Signal Intensity
- USB Interface for Sensor Control, Image Capture, and Firmware Downloads
- Field Updating of Firmware via Sensor Studio II
- Socketed Sensor for Easy Sensor Replacement, allowing Evaluation of KAE-02150 and KAE-02152 Variants
- Includes Mount for C Lens
- Integrated Tripod Mount (1/4–20 Thread)
- Multi-stage Thermoelectric Cooler Module Included. TE Controller not Included
- Optional Lens Mount Kit (not Included) Supports C and F Mount Lens and Includes an IR Cut Filter for Color Imaging Evaluation

Kit Includes

- Image Capture Board with Integral Tripod Mount
- Headboard (Sensor installed and Lens Mount Affixed)
- Dual-stage Thermoelectric Cooler Module (PN: TE Technology TE-2-(127-127)-1.3)
- USB 3.0 Cable (2 meter Length)
- Quick Start Guide
- User's Manual Available in Sensor Studio II Help Section



ON Semiconductor®

www.onsemi.com

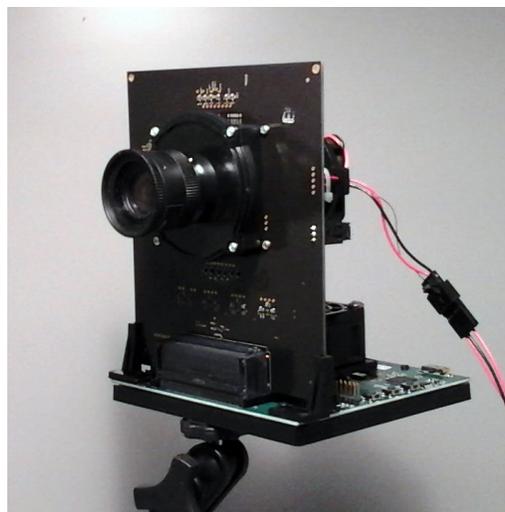


Figure 1. Evaluation Board Picture

Parameter	Typical Value
Hardware Interfaces	USB 3.0, USB 2.0
Typical Data Rate (USB 3.0)	71 MB/sec
Sensor Output Pixel Rate AFE Data Rate	Analog 20/40 MHz LVDS 120/240 MHz
Sensor Frame Rate (Full Resolution with USB 3.0): Normal Operation (40 MHz) EM and Mixed Modes (20 MHz)	(single / dual / quad) 14 / 24 / 50 fps 7 / 12 / 25 fps
Display Frame Rate (Full Resolution with USB 3.0): Normal Operation (40 MHz) Intra Scene (20 MHz)	(single / dual / quad) 7 / 12 / 26 fps 4 / 6 / 13 fps
On Board Frame Buffer Capacity: 2 Mp	64 frames
Optics	Includes mount for C lenses, Compatible with optional lens mount kit

EVBUM2303/D

ORDERING INFORMATION

Part Number	Description	Compatible Image Sensors (sold separately)
KAE-02150-AB-A-GEVK	KAE-02150 (2 Mp) monochrome image sensor evaluation kit (KAE-02150 image sensor included)	KAE-02150 KAE-02152

OPTIONAL HARDWARE ORDERING INFORMATION

Part Number	Description	Compatible Image Sensors (sold separately)
KAE-02150-FBB-JP-FA	KAE-02150 Bayer color image sensor	N/A
LENS-MOUNT-KIT-D-GEVK	Lens mount kit to support C and F mount lenses (includes IR cut-filter)	N/A

REQUIRED HARDWARE AND SOFTWARE

Host Computer

- 2 GHz processor, 4 GB RAM, USB 2.0 / 3.0 interface, Windows 7 Operating System (32 bit or 64 bit)
- Sensor Studio II software, version 6.12.3 or newer. Available for download at onsemi.com

For Maximum Speed

- Native USB 3.0 chipset

Other (User Supplied)

- +12 VDC, 2 Amp, power supply with 2.1 mm center positive DC jack
- Camera lens
- IR cut filter (required for evaluating color image sensors)
- Table-top tripod (optional)
- TE Controller (tested with TE Technology models TC-48-20 and TC-720)

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative