

TCM-BF537


Blackfin® Core Module

The Tiny Core Module TCM-BF537 is optimized for performance and size. The module integrates processor, RAM, flash and power supply at a size of 28x28mm! It is based at the high performance ADSP-BF537 from Analog Devices. The Core-Module is designed for industrial usage (industrial temperature range). It addresses 32MByte SDRAM via its 16bit wide SDRAM bus and has an onboard NOR-flash of 8/64MByte.

Features

CPU	Analog Devices BF537 @ 500MHz
RAM	32MByte SDRAM up to 133MHz
FLASH*	8/64MByte
INTERFACES	CAN 1
	ETHERNET 1x10/100 MBit Ethernet MII/RMII
	PPI 1
	SPI 1
	SPORT 1
	TWI/I²C 1
	UART 2
ADDITIONAL FEATURES	Single 3.3V supply voltage On-board core voltage regulator Low voltage reset circuit
TEMP. RANGE	-40 to +85 °C
VERSIONS*	Connector, Ball Grid Array, Border Pad
DIMENSIONS	28x28mm

* depends on version - see ordering information

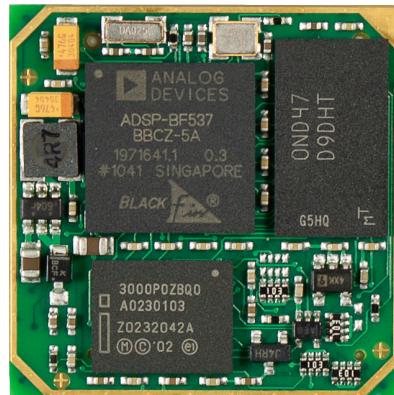

Development Support

- » EVAL-BF5xx Evaluation Board
- » DEV-BF5xx Development Board
- » DEV-BF5xxDA-Lite Development Board
- » BLACKSheep® OS
- » uClinux Port available

Applications

- » Robotics
- » Industrial distributed control
- » Industrial factory automation
- » Industrial handheld applications
- » Biometrics/security
- » Instrumentation
- » Medical appliances
- » Consumer appliances

Ordering Information

Order No.	Info
100-1225-1	TCM-BF537-C-I-Q25S32F8 (TCM-BF537)
100-1226-1	TCM-BF537-B-I-Q25S32F8 (TCM-BF537BP)
100-1227-1	TCM-BF537-A-I-Q25S32F8 (TCM-BF537BGA)
100-1228-1	TCM-BF537-B-I-Q25S32F64 (TCM-BF537BP-64)

BLUETECHNIX MECHATRONISCHE SYSTEME GMBH

Lainzerstraße 162/3
1130 Wien, Austria
www.bluetchnix.com

Tel.: +43 (1) 9142091 x 0
Fax.: +43 (1) 9142091 x 99
Email: office@bluetchnix.at

BLUE
TECHNIX