

т	۵	н п	m	0



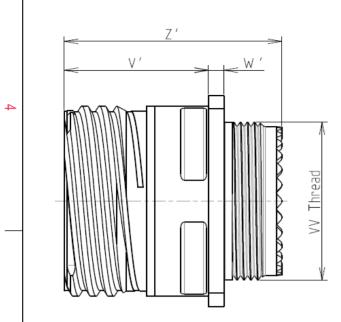



Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

ယ


 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8µm minim
-Durability	: 500 Mating cycles
-Delivered with Souria	u contacts and Accessories
-Temperature Range	: -65°C to +175°C

: 2000 hours

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.39±0.2		
R1	24.61		
R2	23.01		
S	31±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M22x1-6g		

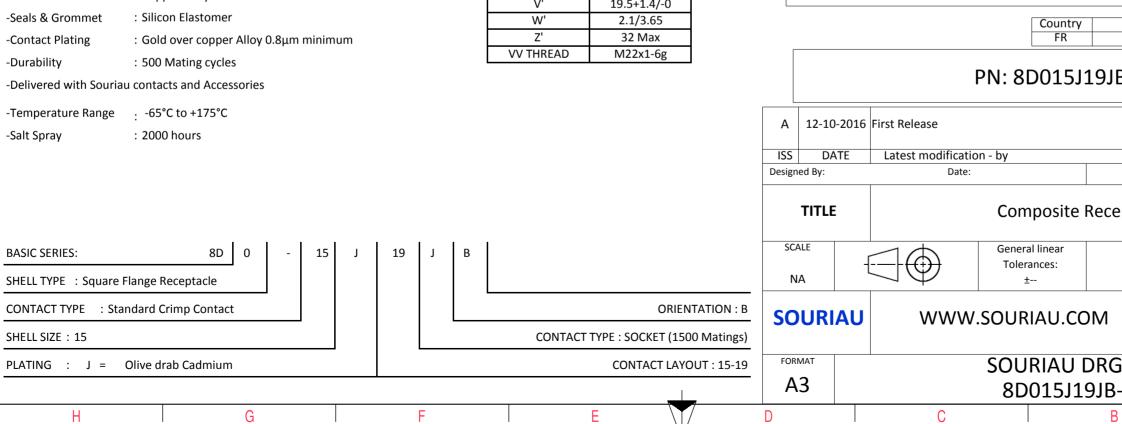

0		σ	1	Þ	
					4
LAY	YOUT SHOWN AS EXA	AMPLE			3
due to a use the Specifications (profession)	not be liable for any r of the Products whic issued by either of t onal recommendatio Country FR PN: 8D015J	h does not co he Parties or h n, technical n Jurisc	mply with by a third party		2
First Release					
Latest modificatio	n - by	1		MOD N°	
Date:	Composite	Receptacl	customer drawin	NG	
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	SOURIAU I 8D015J1		1	SHEET 1/2	
С		В		A	J

Image: Constrainage: Filter Image: Constrainage: Filter Image: Filter Image: Filter <t< th=""><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></t<>								
		<u>_</u>	۵	וד	m	D	0	
			Contact Layout				Pa	anel Cutou
	4							
Image: State in the state			$ \overset{\times}{(\textcircled{\baselineskip})} \stackrel{\times}{(\textcircled{\baselineskip})} \stackrel{\times}{(\baselines$			E M		
Image: Arrow of the state		Contact position ID X-axis (mm) A +.000 (0.00 B +.130 (3.3) C 156 (4.42) D +.260 (6.6) E +.195 (4.92) F F.130 (3.3) G +.000 (0.00) H 130 (3.3) J J.155 (4.92)	(Insert arrangement 15-19) ocation Contact Location (mm) ID (mm) (mm) 0) +225 (572) L -195 (495) +113 (2.87) 0) +225 (572) M -195 (495) +113 (2.87) 0) +225 (572) M -130 (3.30) +225 (5.72) 0) +225 (572) N -005 (1.65) +113 (2.87) 0) +000 (0.00) P +005 (1.65) +113 (2.87) 0) -225 (5.72) T -065 (1.65) +113 (2.87) 0) -225 (5.72) T -065 (1.65) -113 (2.87) 0) -225 (5.72) U -130 (3.30) +.000 (0.00) 1) -225 (5.72) U -130 (3.30) +.000 (0.00) 1) -225 (5.72) U -130 (3.30) +.000 (0.00)			¥	\ØA	ŏī
No No No No No No No No No No	S						ØA ØAA R1	
No No No No No No No No No No								
PN: 8D015. A 12-10-2016 First Release ISS DATE Latest modification - by Designed By: Date: TITLE Composite SCALE NA SOURIAU SOURIAU TORMAT A3 SOURIAU 8D015.12							due to a use of the Pr the Specifications issued b	oducts wh y either of ommendat
ISS DATE Latest modification - by Designed By: Date: TITLE Composite SCALE Image: Composite NA Image: Composite SOURIAU WWW.SOURIAU.C FORMAT SOURIAU A3 SOURIAU	2						PN: 8	L
Designed By: Date: TITLE Composite SCALE SCALE NA Image: SCALE NA Image: SCALE SOURIAU WWW.SOURIAU.C FORMAT SOURIAU A3 SOURIAU								
SCALE NA SOURIAU FORMAT A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU SOURIAU SOURIAU SOURIAU								
NA Tolerances: <u>t</u> SOURIAU WWW.SOURIAU.C FORMAT SOURIAU A3 8D015J2						TITLE	Cor	nposite
FORMAT SOURIAU A3 8D015J2	<u> </u>						-[() Tole	rances:
A3 8D015J2						SOURIA	WWW.SOUF	RIAU.C
					_			
		Н	G	F	E	D	C	

