SPECIFICATIONS


(RoHS Compliant)

Model Number:MD24B2Part Number:19028869A





Mechanical Drawing:

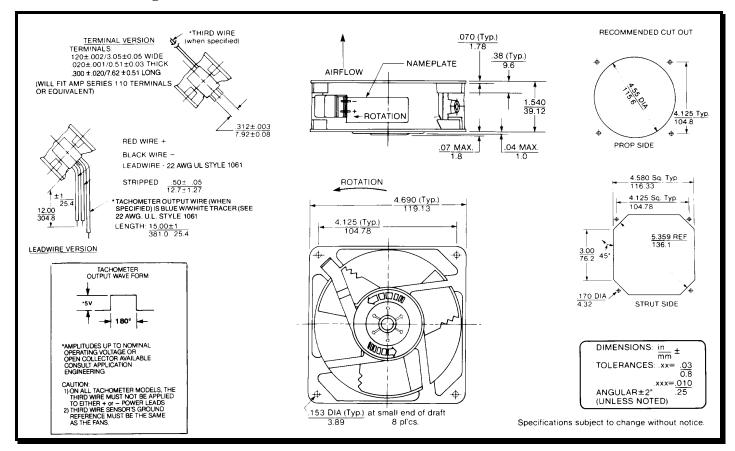

Motor:

Nominal Voltage = 24 vdcOperating Voltage Range = 12 - 28 vdcRunning Current = 0.250 ampsLocked Rotor Current = 0.750 amps**Running Power** = 6.0 watts Average Speed = 3100 rpm**Bearings** = BallAir Flow = 110 CFMAcoustic $= 50 \, dBA$

Construction:

Venturi: Die-Cast Zinc Alloy, Black Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 85,000

hours at 40°C.

Additional Features:

Brushless DC Motor Locked Rotor Protection

Polarity Protected

Automatic Restart Capability

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

2 0.110" Terminals

Agency Approvals:

UL, CSA, TUV, CE