




SECTION-D

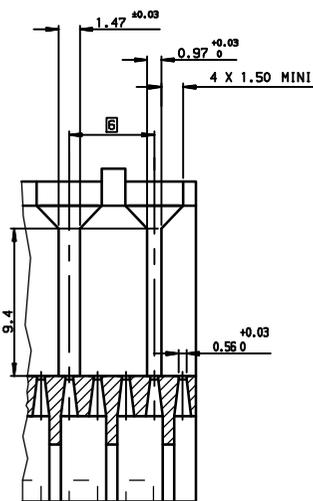


SECTION-B

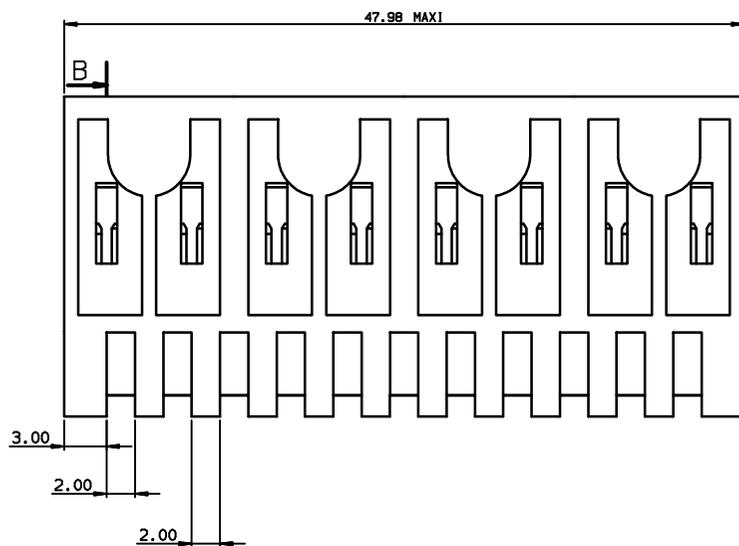

REDUCED TOP VIEW

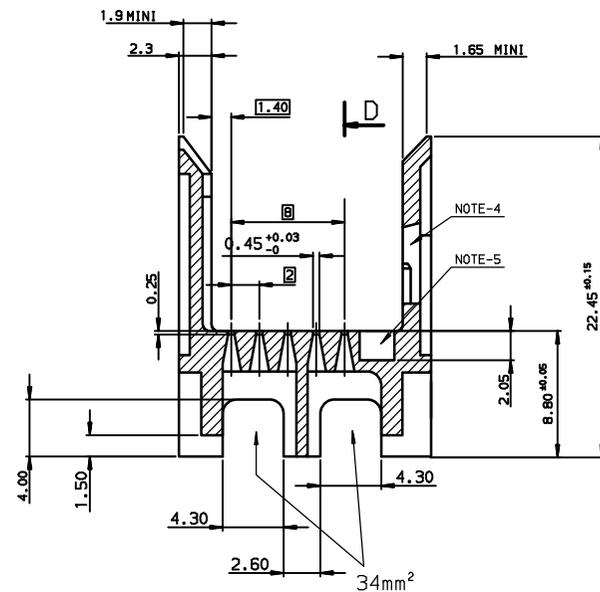

AREA IN CONTACT WITH PCB: 220mm²

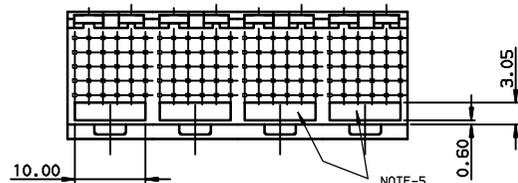

NOTE: RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

NOTE-1: OTHER DIMENSIONS IN ACCORDANCE WITH IEC-48B-(G.296) SPECIFICATION
 NOTE-2: MATERIAL HIGH TEMPERATURE NATURAL COLOUR
 NOTE-3: FORCE FIT CAVITIES FOR RETENTION WITH REAR PLUG-UP CONTACT PART
 NOTE-4: CAVITY FOR LATCHING AND CODING
 NOTE-5: POLARIZING CAVITIES

Part number: **HM1 3238LF**

www.fciconnect.com		surface 150 1302	tolerance std 150 406 150 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	CHAILLEUX	2005/10/13	ANGULAR	0.x ±0.1	size A2
Eng	TARON	2005/10/13	LINEAR	0.xx ±0.1	Scale 4
Chr	LEGARE	2005/10/13	0.xx' ±2'	0.xxx ±0.1	ECN L506-0095
Appr	LEGARE	2005/10/13	Product Family	METRAL	Spec ref -
FCI		MILLIPACS-1 SHROUD 5 ROWS 120 WAYS		Rev. B	
title		SPECIFIC STAND-OFF 8.80mm		Part no	C-8626-11297
catalog no				CUSTOMER sheet 1 of 1	