


CEL**BIPOLAR ANALOG INTEGRATED CIRCUIT
UPC2749TB****3 V, SUPER MINIMOLD
1900 MHz SI RFIC AMPLIFIER****FEATURES**

- HIGH DENSITY SURFACE MOUNTING:** 6 pin super minimold or SOT-363 package
- GAIN:** 16 dB TYP
- NOISE FIGURE:** 4.0 dB TYP
- SUPPLY VOLTAGE:** VCC = 2.7 to 3.3 V

DESCRIPTION

The UPC2749TB is a Silicon RF Integrated Circuit which is manufactured using the NESAT III process. This device is suitable as a buffer amplifier for GPS, PCS and other communication receivers. The UPC2749TB is pin compatible and has comparable performance as the larger UPC2749T, so it is suitable for use as a replacement to help reduce system size. The IC is housed in a 6 pin super minimold or SOT-363 package.

The stringent quality assurance and test procedures assure the highest reliability and performance.

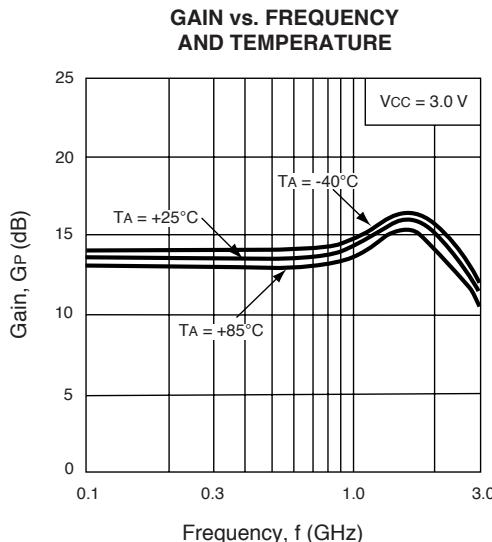**ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, $Z_L = Z_S = 50 \Omega$, $V_{CC} = 3.0 \text{ V}$)

| PART NUMBER PACKAGE OUTLINE | | | UPC2749TB SO6 | | |
|--------------------------------|---|-------|------------------|-------|------|
| SYMBOLS | PARAMETERS AND CONDITIONS | UNITS | MIN | TYP | MAX |
| I _{CC} | Circuit Current (no signal) | mA | 4 | 6 | 8 |
| G _S | Small Signal Gain, $f = 900 \text{ MHz}$ $f = 1900 \text{ MHz}$ | dB | | 14.5 | |
| G _S | | dB | 13 | 16 | 18.5 |
| f _U ¹ | Upper Limit Operating Frequency | GHz | 2.5 | 2.9 | |
| P _{1dB} | 1 dB Compressed Output Power at 1900 MHz | dBm | | -12.5 | |
| P _{SAT} | Saturated Output Power, $f = 1900 \text{ MHz}$ | dBm | -9 | -6 | |
| NF | Noise Figure, $f = 900 \text{ MHz}$ $f = 1900 \text{ MHz}$ | dB | | 3.2 | |
| NF | | dB | | 4.0 | 5.5 |
| R _{LIN} | Input Return Loss, $f = 1900 \text{ MHz}$ | dB | 7 | 10 | |
| R _{LOUT} | Output Return Loss, $f = 1900 \text{ MHz}$ | dB | 9.5 | 12.5 | |
| I _{SOL} | Isolation, $f = 1900 \text{ MHz}$ | dB | 25 | 30 | |
| OIP ₃ | SSB Output Third Order Intercept, $f_1 = 1900 \text{ MHz}$, $f_2 = 1902 \text{ MHz}$ | dBm | | -3.5 | |
| R _{TH} (J-A) | Thermal Resistance (Junction to Ambient) Mounted on a 50 x 50 x 1.6 mm epoxy glass PWB | °C/W | | | 325 |

Note:

1.The gain at f_U is 3 dB down from the gain at 1900 MHz.

ABSOLUTE MAXIMUM RATINGS¹ ($T_A = 25^\circ\text{C}$)


| SYMBOLS | PARAMETERS | UNITS | RATINGS |
|------------------|--------------------------------------|-------|-------------|
| V _{CC} | Supply Voltage | V | 4.0 |
| I _{CC} | Total Supply Current | mA | 15 |
| P _{IN} | Input Power | dBm | 0 |
| P _T | Total Power Dissipation ² | mW | 200 |
| T _{OP} | Operating Temperature | °C | -40 to +85 |
| T _{STG} | Storage Temperature | °C | -55 to +150 |

Notes:


1. Operation in excess of any one of these parameters may result in permanent damage.
2. Mounted on a 50 x 50 x 1.6 mm epoxy glass PWB ($T_A = 85^\circ\text{C}$).

RECOMMENDED OPERATING CONDITIONS


| SYMBOLS | PARAMETERS | UNITS | MIN | TYP | MAX |
|-----------------|-----------------------|-------|-----|-----|-----|
| V _{CC} | Supply Voltage | V | 2.7 | 3 | 3.3 |
| T _{OP} | Operating Temperature | °C | -40 | 25 | 85 |

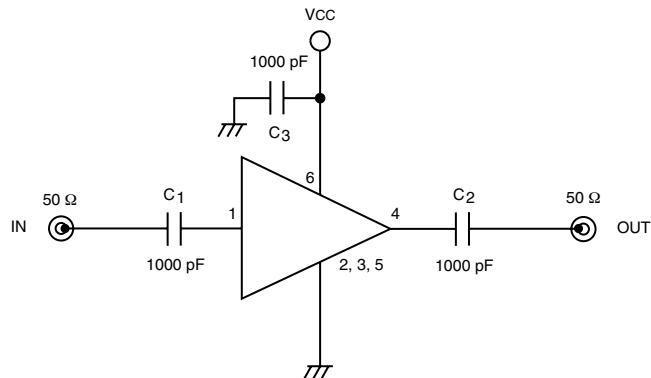TEST CIRCUIT**TYPICAL PERFORMANCE CURVES** ($T_A = 25^\circ\text{C}$)


ISOLATION vs. FREQUENCY

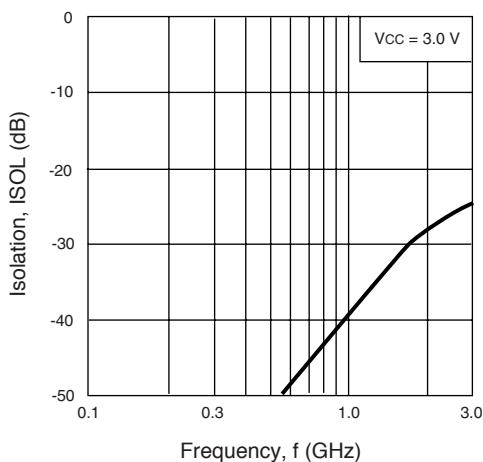


INPUT RETURN LOSS AND OUTPUT RETURN LOSS vs. FREQUENCY

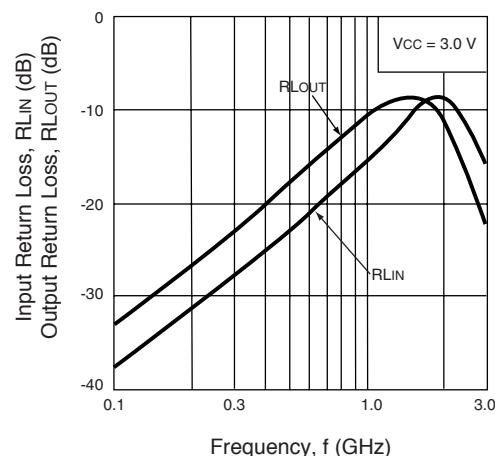







OUTPUT POWER vs. INPUT POWER AND VOLTAGE

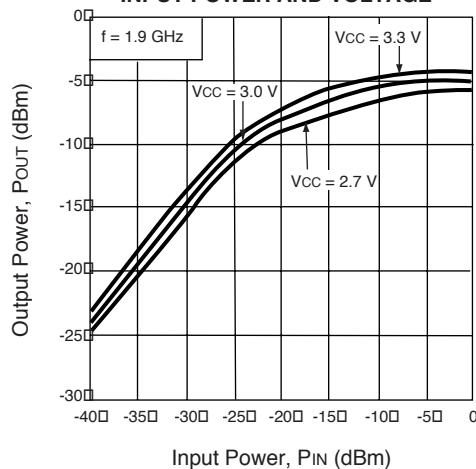

OUTPUT POWER vs. INPUT POWER AND TEMPERATURE

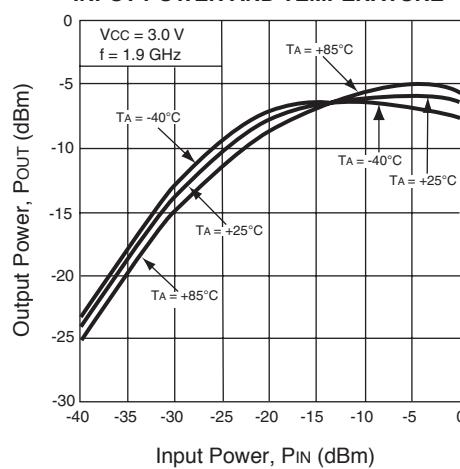




TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

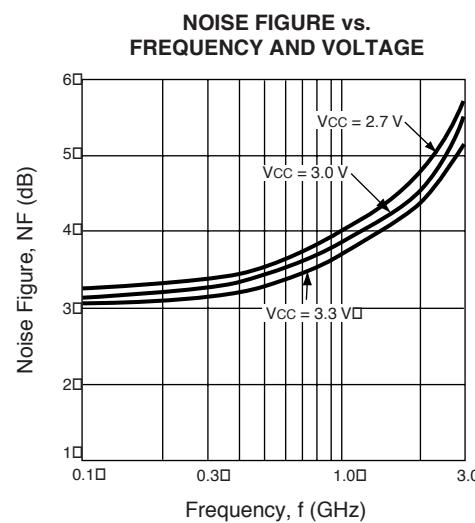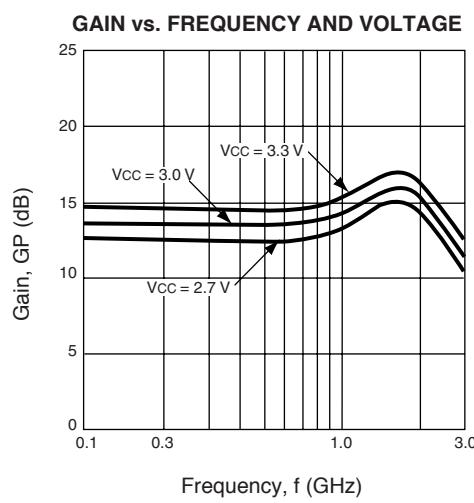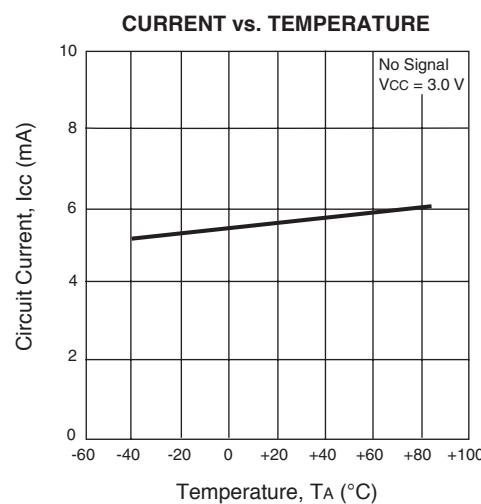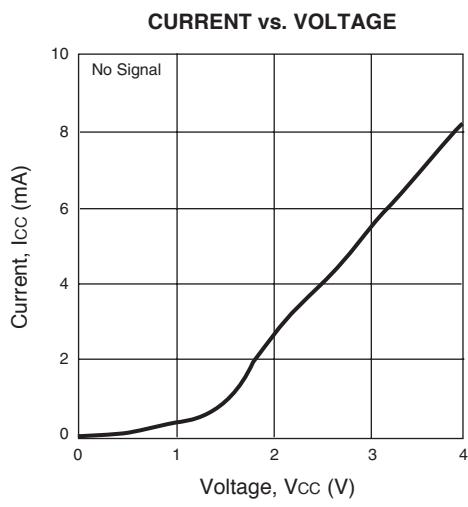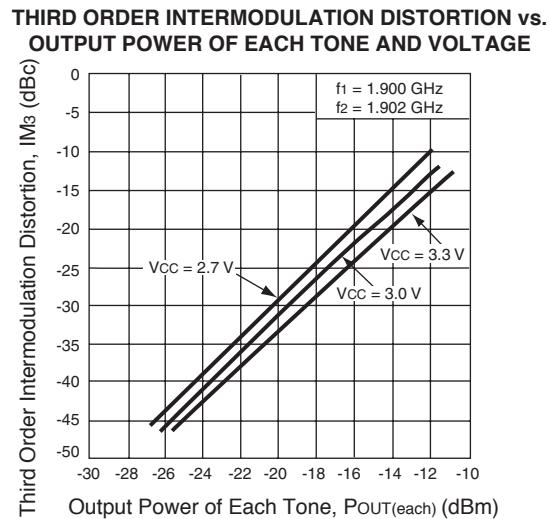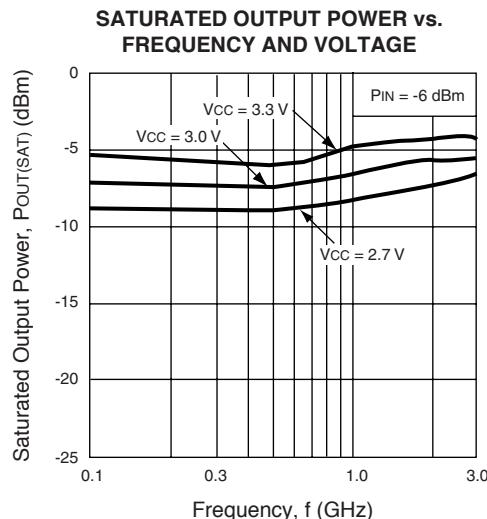

PIN DESCRIPTION

| Pin No. | Pin Name | Applied Voltage (V) | Pin Voltage (V) | Description | Internal Equivalent Circuit |
|-------------|----------|---------------------|-----------------|--|-----------------------------|
| 1 | Input | – | 0.82 | Signal input pin. An internal matching circuit, configured with resistors, enables $50\ \Omega$ connection over a wide bandwidth. A multi-feedback circuit is designed to cancel the deviations of h_{FE} and resistance. This pin must be coupled to the signal source with a blocking capacitor. | |
| 4 | Output | – | 2.87 | Signal output pin. An internal matching circuit, configured with resistors, enables $50\ \Omega$ connection over a wide bandwidth. This pin must be coupled to the output load with a blocking capacitor. | |
| 6 | Vcc | 2.7 to 3.3 | – | Power supply pin. This pin should be externally equipped with a bypass capacitor to minimize ground impedance. | |
| 2 3 5 | GND | 0 | – | Ground pins. These pins should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to minimize impedance difference. | |

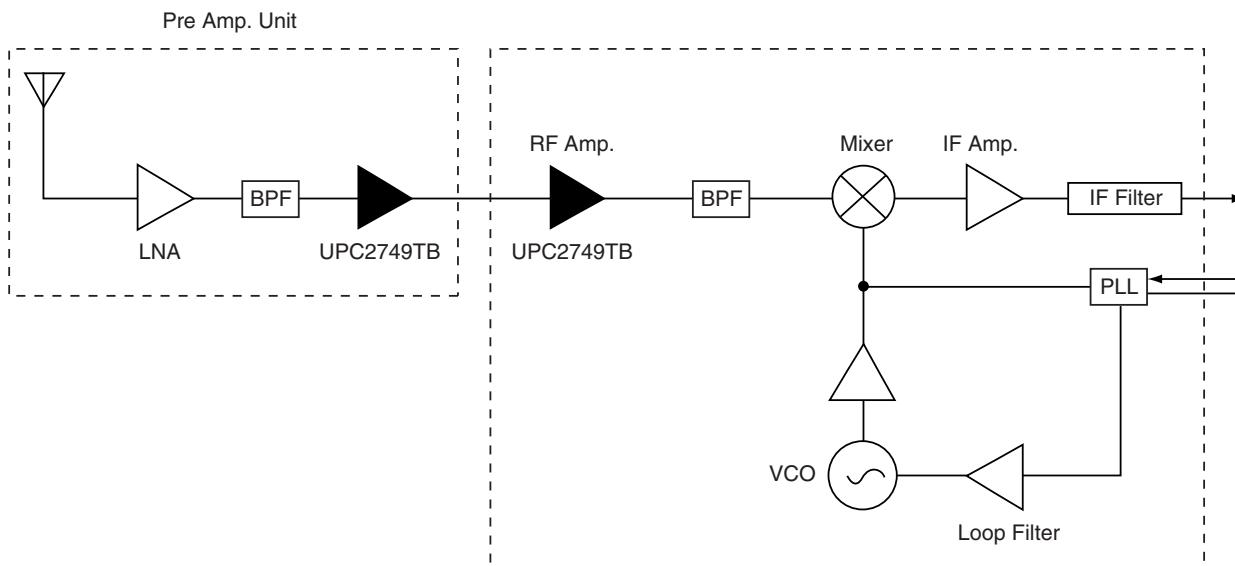
SYSTEM APPLICATION EXAMPLE**Example of GPS Receiver**

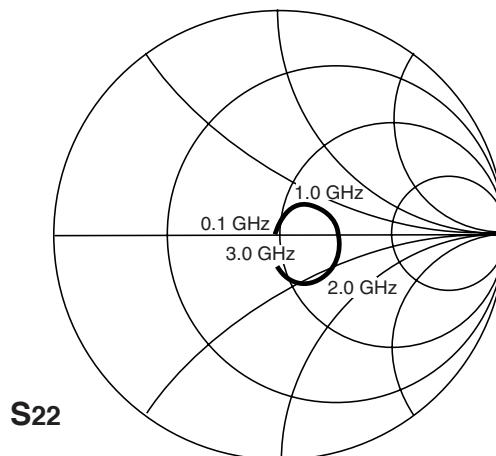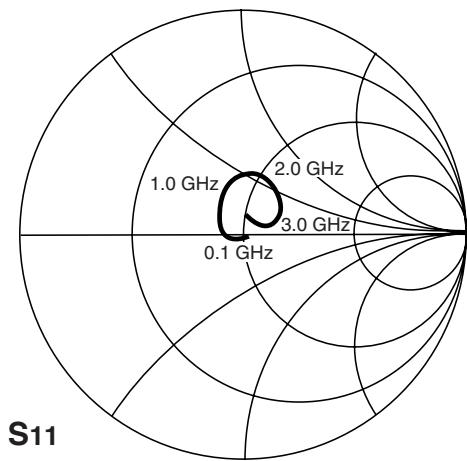TYPICAL SCATTERING PARAMETERS (TA = 25°C)


V_{CC} = 3.0 V, I_{CC} = 6.5 mA

| FREQUENCY GHz | S_{11} | | S_{21} | | S_{12} | | S_{22} | | K |
|------------------|----------|--------|----------|--------|----------|-------|----------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | |
| 0.1 | 0.021 | 13.0 | 4.096 | -1.9 | 0.002 | -1.1 | 0.024 | 165.8 | 66.82 |
| 0.2 | 0.038 | -30.5 | 4.216 | -7.8 | 0.001 | 75.4 | 0.033 | 113.6 | 129.26 |
| 0.3 | 0.034 | -71.8 | 4.282 | -15.5 | 0.001 | 141.5 | 0.064 | 96.1 | 90.16 |
| 0.4 | 0.052 | -120.5 | 4.403 | -21.0 | 0.002 | 129.9 | 0.080 | 87.9 | 45.30 |
| 0.5 | 0.062 | -149.9 | 4.390 | -26.6 | 0.002 | 134.1 | 0.103 | 76.9 | 57.58 |
| 0.6 | 0.079 | -169.7 | 4.399 | -31.6 | 0.003 | 128.3 | 0.127 | 68.6 | 34.08 |
| 0.7 | 0.097 | 173.6 | 4.566 | -36.7 | 0.005 | 132.9 | 0.151 | 60.6 | 22.08 |
| 0.8 | 0.116 | 160.5 | 4.667 | -41.3 | 0.007 | 131.5 | 0.174 | 53.7 | 14.70 |
| 0.9 | 0.134 | 149.3 | 4.843 | -46.8 | 0.008 | 129.3 | 0.197 | 44.9 | 12.29 |
| 1.0 | 0.156 | 138.8 | 5.016 | -52.6 | 0.009 | 124.6 | 0.220 | 36.1 | 10.00 |
| 1.1 | 0.178 | 128.5 | 5.305 | -60.3 | 0.014 | 131.4 | 0.240 | 28.0 | 6.15 |
| 1.2 | 0.195 | 118.7 | 5.660 | -67.1 | 0.016 | 122.5 | 0.262 | 17.3 | 5.13 |
| 1.3 | 0.214 | 108.7 | 5.835 | -76.2 | 0.020 | 118.6 | 0.279 | 8.6 | 3.80 |
| 1.4 | 0.229 | 99.5 | 6.148 | -84.5 | 0.022 | 114.4 | 0.287 | -2.0 | 3.23 |
| 1.5 | 0.249 | 89.4 | 6.364 | -93.8 | 0.025 | 107.7 | 0.294 | -13.5 | 2.72 |
| 1.6 | 0.259 | 79.9 | 6.611 | -103.6 | 0.028 | 104.3 | 0.294 | -23.6 | 2.35 |
| 1.7 | 0.264 | 69.8 | 6.577 | -113.5 | 0.032 | 96.8 | 0.283 | -33.8 | 2.09 |
| 1.8 | 0.259 | 60.3 | 6.549 | -123.4 | 0.034 | 91.8 | 0.272 | -44.1 | 1.99 |
| 1.9 | 0.248 | 50.9 | 6.407 | -132.9 | 0.036 | 83.3 | 0.036 | -53.8 | 1.97 |
| 2.0 | 0.238 | 43.6 | 6.321 | -140.8 | 0.037 | 78.5 | 0.234 | -61.4 | 1.99 |
| 2.1 | 0.218 | 35.9 | 6.046 | -148.8 | 0.038 | 75.1 | 0.213 | -69.5 | 2.04 |
| 2.2 | 0.204 | 30.1 | 5.862 | -156.5 | 0.039 | 70.4 | 0.193 | -73.8 | 2.08 |
| 2.3 | 0.183 | 25.3 | 5.696 | -163.2 | 0.040 | 68.3 | 0.174 | -79.5 | 2.15 |
| 2.4 | 0.156 | 21.2 | 5.430 | -170.5 | 0.041 | 60.7 | 0.164 | -84.1 | 2.25 |
| 2.5 | 0.140 | 18.8 | 5.282 | -176.3 | 0.042 | 61.6 | 0.152 | -82.1 | 2.25 |
| 2.6 | 0.119 | 18.7 | 5.013 | 177.2 | 0.040 | 58.1 | 0.142 | -84.5 | 2.53 |
| 2.7 | 0.095 | 21.2 | 4.849 | 170.9 | 0.042 | 55.1 | 0.146 | -85.5 | 2.46 |
| 2.8 | 0.078 | 30.0 | 4.596 | 164.9 | 0.042 | 51.9 | 0.149 | -83.9 | 2.62 |
| 2.9 | 0.066 | 44.5 | 4.446 | 158.1 | 0.042 | 44.7 | 0.154 | -91.8 | 2.70 |
| 3.0 | 0.070 | 66.0 | 4.163 | 152.3 | 0.044 | 41.9 | 0.171 | -92.8 | 2.73 |
| 3.1 | 0.082 | 78.1 | 3.966 | 145.3 | 0.042 | 37.1 | 0.181 | -99.6 | 2.97 |

OUTLINE DIMENSIONS (Units in mm)

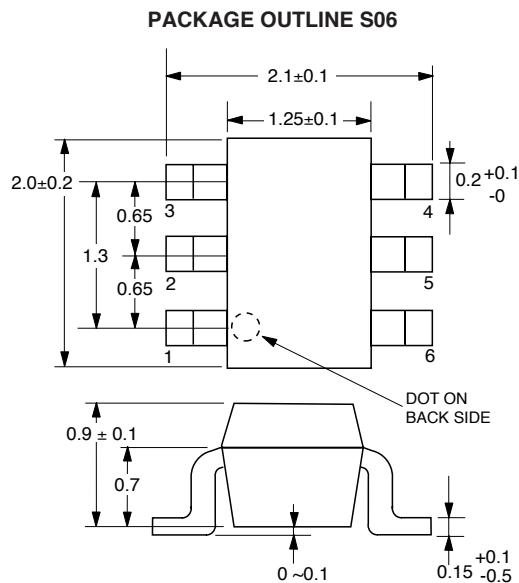

LEAD CONNECTIONS

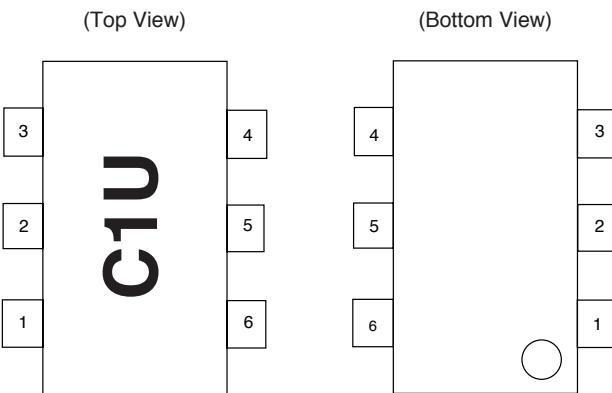

1. INPUT
- 2.. GND
3. GND
4. OUTPUT
5. GND
6. Vcc

ORDERING INFORMATION

| PART NUMBER | MARKING | QTY |
|----------------|---------|---------|
| UPC2749TB-E3-A | CIU | 3K/Reel |

Note:

Embossed Tape, 8 mm wide. Pins 1, 2 and 3 face perforated side of tape.

EXCLUSIVE NORTH AMERICAN AGENT FOR RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: <http://WWW.CEL.COM>