



Smart Technology. Delivered.

450 MHz MicroSphere Antenna

IF450



450 MHz OMNIDIRECTIONAL IN-BUILDING ANTENNA

The widespread use of cellular phones and wireless network applications inside buildings has increased the need for antenna systems that can provide considerable gain over traditional dipole antennas.

Laird's in-building wireless antennas are particularly applicable in environments where aesthetics and wide angle coverage are necessary for successful wireless deployment. Their surprisingly small size allow the antennas to be hidden almost anywhere, providing an invisible solution for most applications.


FEATURES

- Surprisingly small size allows it to be hidden almost anywhere, providing an invisible solution for many applications.
- The field pattern is toroidal, providing omni-directional coverage in any plane around the long axis of the antenna, and two lobes in any plane parallel to the long axis.

MARKETS


- The UHF band antenna is a good solution for stealth in-building public safety systems.

ANTENNA PATTERNS




Azimuth Plane

Cut perpendicular to the antenna, parallel to the connector/cable exit, perpendicular to the polarization



Elevation Plane

Cut perpendicular to the antenna, parallel to the connector/cable exit, parallel to the polarization axis



Omni Plane


Cut in the plane of the antenna perpendicular to the connector/cable exit

SPECIFICATIONS	
Element Type	Microstrip
Frequency Range	410-520 MHz (UHF)
Peak Gain	3 dBi
Polarization	Linear
Impedance	50 ohms
Maximum Input Power	10 watts
VSWR	2:1 Typical across the band
Dimensions (L x W x H)	13 x 14.7 x .25 cm
Housing	Acrylic
Operating/Storage Temperature	-40° to +70°C

MODEL #	REFERENCE #	CONNECTOR
IF450-SF00	CAF94350	SMA Female Panel

MOUNTING OPTIONS

- Includes nylon screws for mounting to ceiling tile or finished ceiling

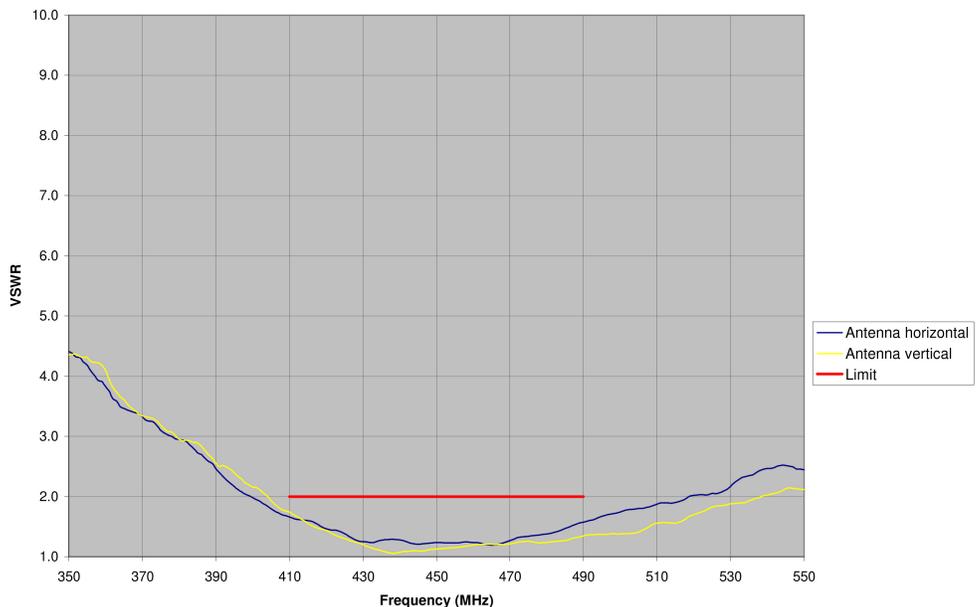

ANT-DS-IF450 0615

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com