

**SPECIFICATIONS:**

**MATERIALS:**






HOUSING: PBT, UL94 V-0, BLACK  
 CONTACTS: GOLD PLATED BRASS  
 NUT: SEE P/N KEY BELOW  
 SHELL: SEE P/N KEY BELOW  
 ORING: NBR, BLACK

**ELECTRICAL:**


RATED CURRENT: 3A  
 RATED VOLTAGE: 60V  
 INSULATION RESISTANCE: 100 MOhms MIN.  
 CONTACT RESISTANCE: 10 mOhms MAX.  
 MAX WIRE AWG: 24 AWG

**ENVIRONMENT:**

OPERATING TEMPERATURE: -40°C TO +85°C  
 WATER PROOF: IP66/IP67 (SEE NOTE BELOW)

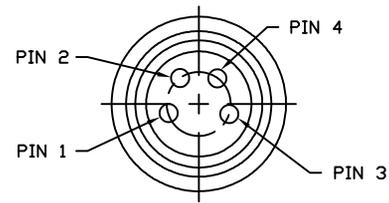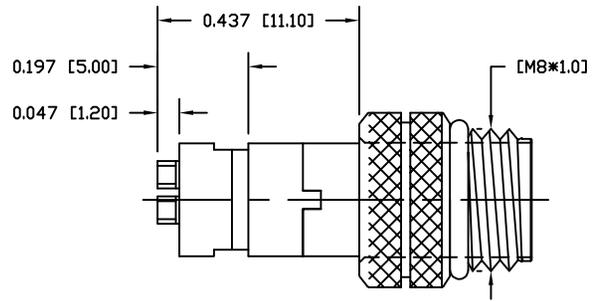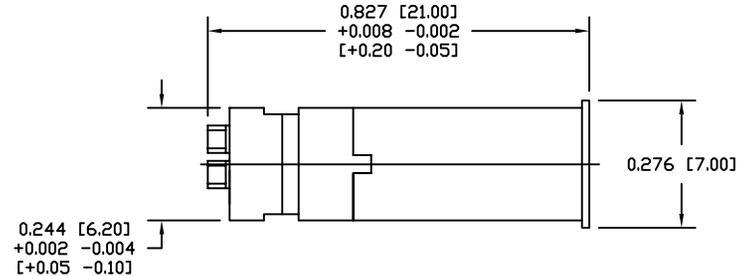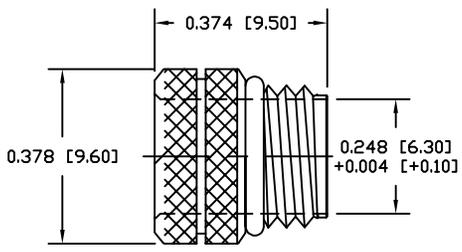

WHEN MATING WITH NORCOMP CONNECTORS, ONLY AN IP66 RATING CAN BE ACHIEVED IN MATING AREA BETWEEN CONNECTORS. CONNECTOR IS OTHERWISE IP67 AND MAY BE FULLY IP67 IF MATED WITH COMPETITOR PARTS.

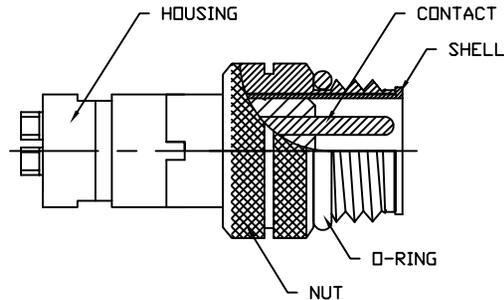

854-004-103RLSY

- 1 = GOLD FLASH
- 4 = 10u" GOLD
- 03 = BRASS/NICKEL (B/N) SHELL & NUT
- 0S = (B/N) SHELL & STAINLESS STEEL NUT
- SS = STAINLESS STEEL SHELL & NUT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON  
 DATE: 03/04/2016

NorComp

SCALE: NTS	SHEET 1	OF 1	REV 8
DWG NO. 854-004-103RLSY			