

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: 0.5 to 1.0 GHz

1.2 COUPLING: 10 ±1.0dB

1.3 FREQUENCY SENSITIVITY: ±0.75dB

1.4 INSERTION LOSS: 0.20dB MAX.

1.5 DIRECTIVITY: 25dB MIN.

1.6 VSWR: 1.15:1 MAX.

1.7 INPUT POWER:

AVG INPUT: 200 WATTS

AVG REVERSE: 50 WATTS

AVG PEAK: 10 KILOWATTS

2.0 WEIGHT: 0.53 Kg. (1.2 lbs.)

3.0 FINISHING:

3.1 GREY PER MIL-E-15090 TYPE II , CLASS 2

OVER MIL-C-5541 CLASS 3A


MEETS MIL-F-14072

MEETS MIL-E-5400

3.2 MARK UNIT AS SHOWN

(REF.: SLK-09143-82-01)

USING BLUE INK.

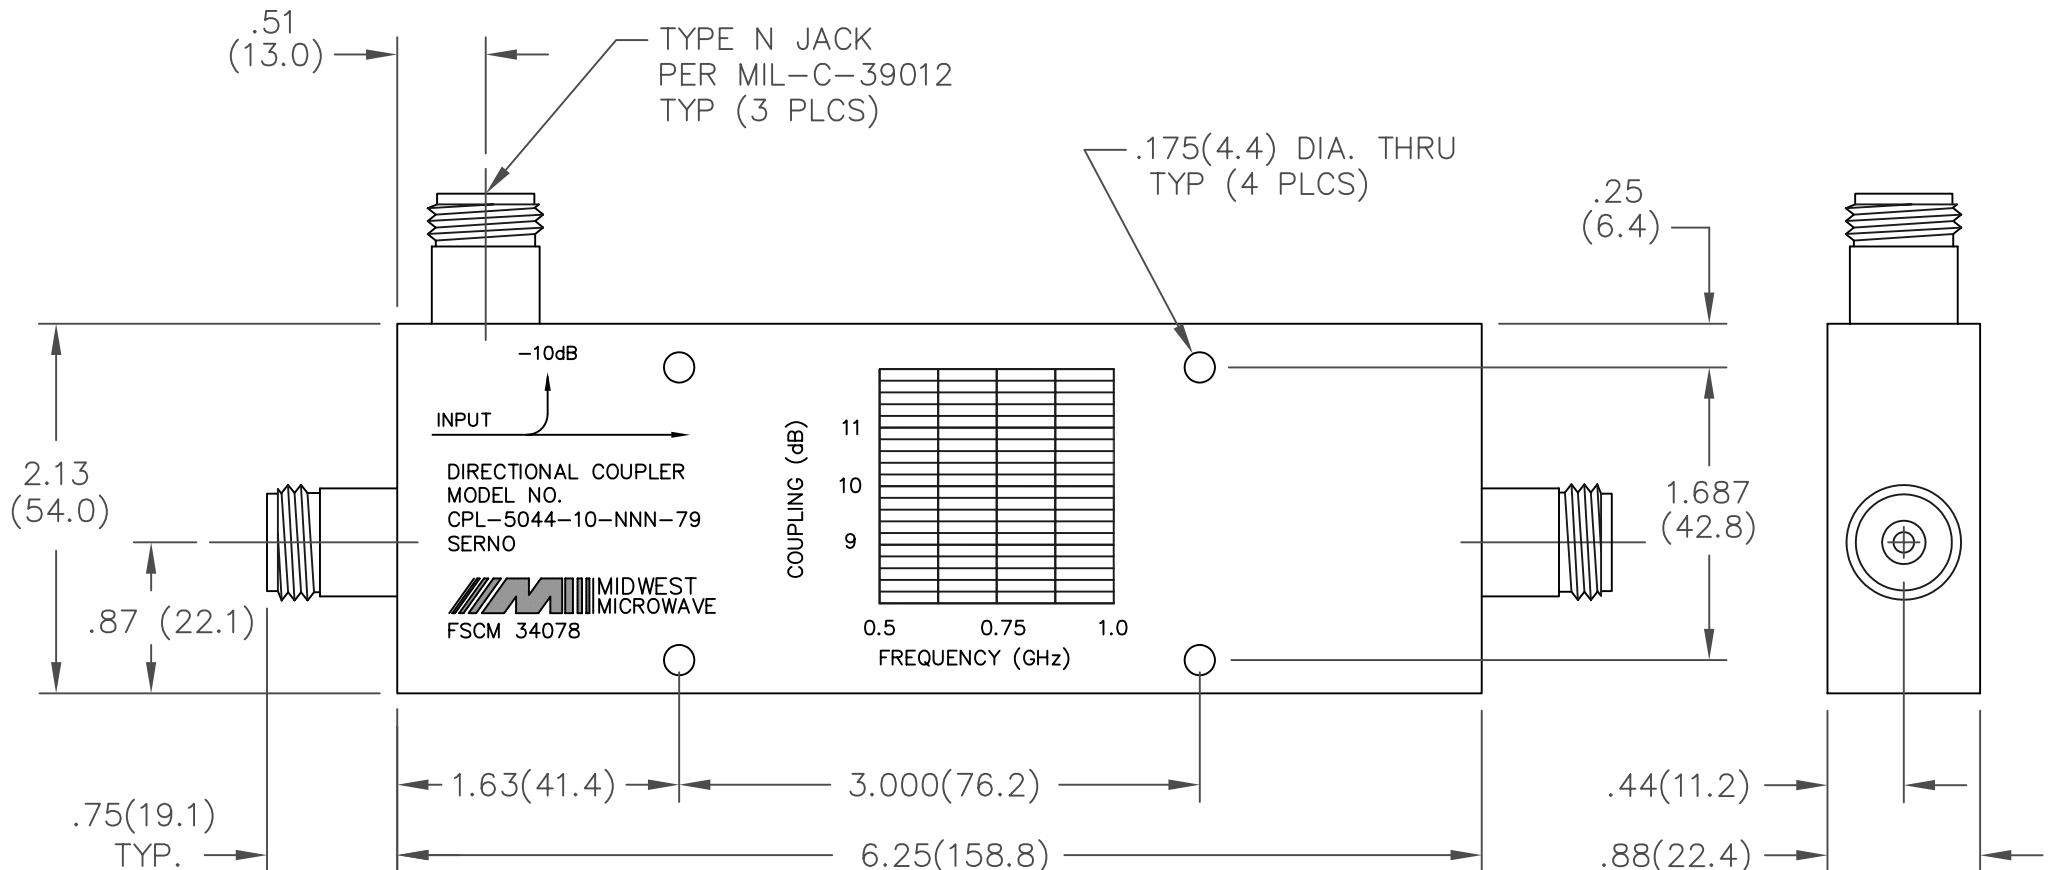

4.0 DIMENSIONS IN PARENTHESIS

ARE IN MILLIMETERS.

REV.	DESCRIPTION	DATE
	RELEASED	10/27/93
	A ECN 14443	4/28/95
	B ECN 19106	3/18/03
I	C ECO 22652	11/8/10

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005

2 PLACE DECIMALS ±.02

FRACTIONS ±1/64

PARALLELITY: T.I.R. _____

FLATNESS: T.I.R. _____

CONCENTRICITY: T.I.R. _____

ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE

34078

MIDWEST MICROWAVE



EMERSON
Network Power
Connectivity Solutions

DRAWN/DATE
A.BEATTY
10/27/93

ENG./DATE
P.GOODMAN
1/27/94

CHECKED/DATE
M.HOLLMAN
1/20/94

APPROVED/DATE

TITLE
DIRECTIONAL COUPLERS
OUTLINE DRAWING

DRAWING NUMBER
CPL-5044-10-NNN-79-01

REV.
C

SCALE: 1=1 SHEET 1 of 1

MODEL NUMBER
CPL-5044-10-NNN-79