

MATERIALS AND FINISHES:

SMA JACK BULKHEAD CONNECTOR:

BODY, CRIMP TUBE, JAM NUT: BRASS  
PLATED GOLD

CENTER CONTACT: BERYLLIUM COPPER  
PLATED GOLD

INSULATOR: PTFE

LOCK WASHER: PHOSPHOR BRONZE  
PLATED GOLD

MHF® 4L LK CONNECTOR





CABLE: 1.37MM CABLE

HEAT SHRINK TUBE: PE

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0~6GHz  
IMPEDANCE: 50 Ω  
WITHSTAND VOLTAGE(AC): 350V @0.5mA  
CONTINUITY: 100% TEST

PACKAGING BY PLASTIC BAG

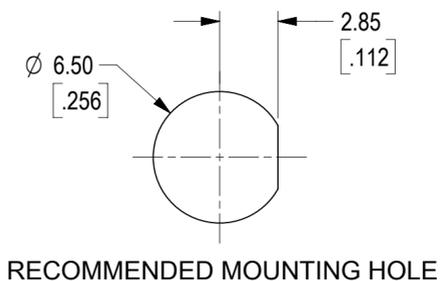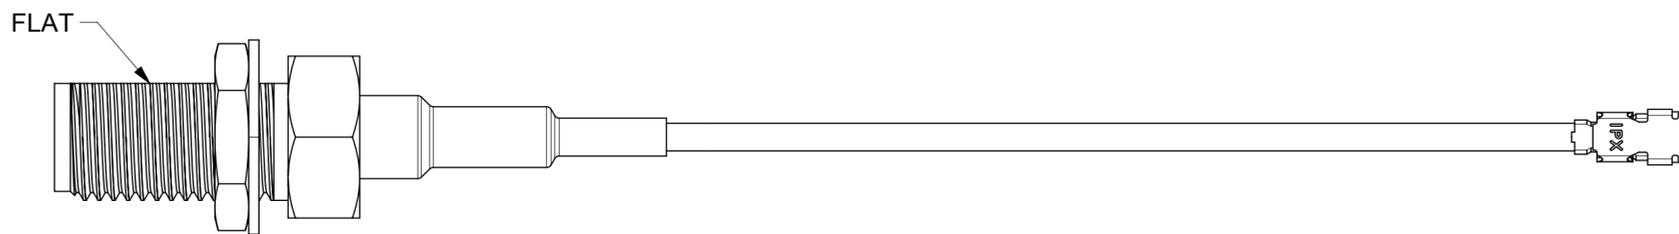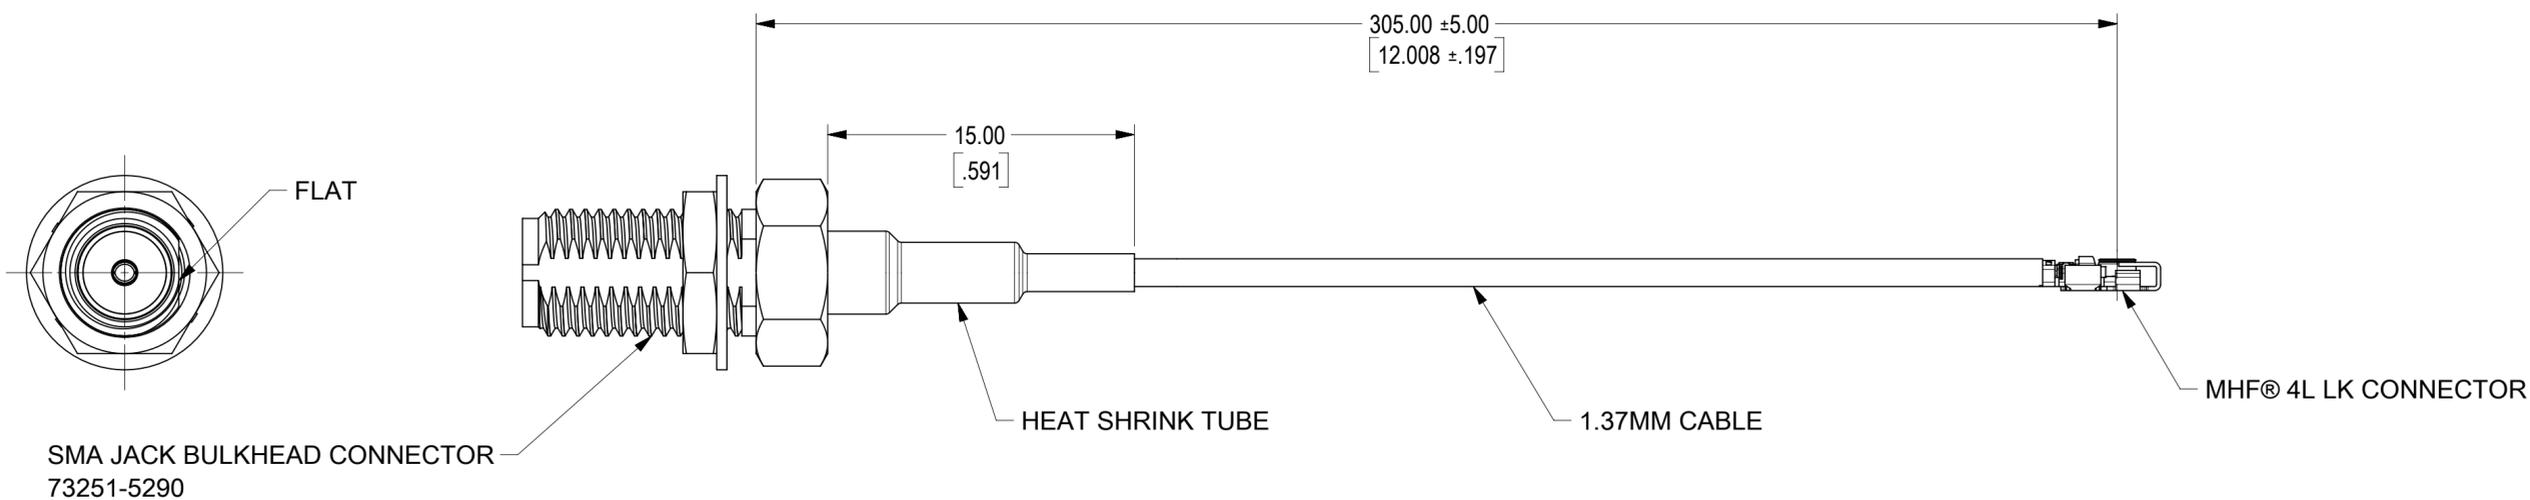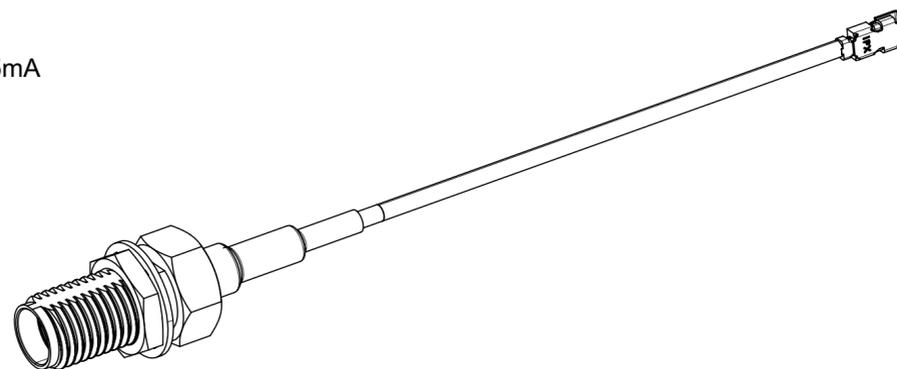

RECOMMENDED MOUNTING HOLE

PART # 73230-6160

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
	DIMENSION UNITS	SCALE	CURRENT REV DESC:						
$\frac{F}{A} = 0$	MM/INCH	4:1	EC NO: 721426 DRWN: YHUANG11 CHK'D: MYLU07 APPR: LCHEN03						
$\frac{E}{C} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)								
$\frac{E}{P} = 0$	ANGULAR TOL ± °		2022/07/21						
DIVISIONAL SYMBOLS	4 PLACES ±		2022/09/19						
	3 PLACES ±		2022/09/22						
	2 PLACES ±		INITIAL REVISION:						
	1 PLACE ±		DRWN: YHUANG11 APPR: LCHEN03						
0 PLACES ±		2022/07/21 2022/09/22	DOCUMENT NUMBER						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOC TYPE	DOC PART	REVISION
			C-SIZE	73230	73230-6160	GENERAL MARKET	PSD	000	A
									SHEET NUMBER
									1 OF 1

**molex**

CA, SMA JACK BULKHEAD TO MHF® 4L LK  
WITH DIA 1.37MM CABLE,50 OHMS,EWR#: 15305-A

PRODUCT CUSTOMER DRAWING

732306160

PSD 000 A