


E-T-A® 3130 Thermal Overcurrent Circuit Breaker

Description

Single, two and three pole rocker switch/thermal trip free circuit breakers (S-type TO CBE to EN 60934) of compact design for snap-in panel mounting. Available either with protection on one/both/all poles or, in the case of the double pole version, protection on one pole only. Illumination is optional and there is a choice of rocker colours. Approved to CBE standard EN 60934 (IEC 60934).

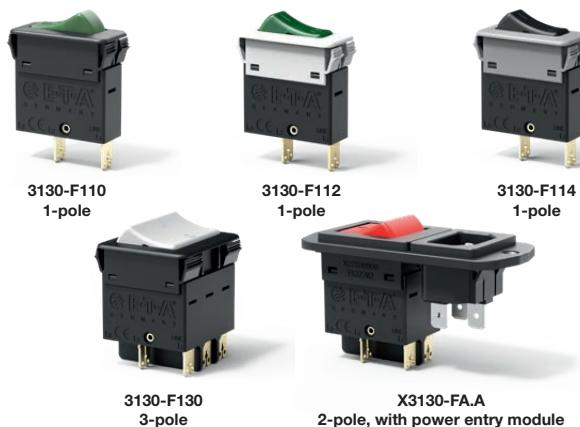

Typical applications

Motors, protection of transformers (e.g. for illumination), solenoids, household and office machines, electrical tools, mobile homes, boats, construction vehicles, medical equipment to EN 60601.

Features and benefits

- Single pole, double pole or three-pole thermal circuit breaker/switch combination
- Voltage ratings AC 240 V; 3 AC 415 V; DC 50 V
- Current ratings: 0.1...20 A
- Rating UL1077/AC 277 V, Use Group EA for industrial applications
- Can be combined with X3120 Power Entry Module. Please refer to the respective section in this document.

Your benefits

- Maximum equipment availability is ensured by overload protection perfectly matched with the loads (prevention of nuisance tripping) and quick resetability
- Reduced mounting and wiring time
- Less space requirement
- Less disposition and storage costs
- Enhanced overall reliability

Compliances



Information online

The current data sheet is available on our website:
www.e-t-a.de/d001

Approvals

Authority	Standard	Rated voltage	Current ratings	Approval logos			
VDE	IEC/EN 60934	AC 240 V AC 240 V 3 AC 415 V DC 50 V DC 28 V	0.1 A...20 A (1-pole) 0.1A...16 A (2-pole) 0.1A...16 A (3-pole) 0.1A...16 A (1-, 2-pole) 0.1 A...20 A (1-pole)				
CQC ⁽¹⁾	GB/T 17701	AC 240 V AC 240 V 3 AC 415 V DC 50 V	0.1 A...20 A (1-pole) 0.1A...16 A (2-pole) 0.1A...16 A (3-pole) 0.1A...16 A (1-, 2-pole)				
(1) not for frame mounting 2/3/4/5							
Authority	Standard	Rated voltage	Current ratings	UG	TC	OL	Approval logos
UL/CSA	UL 1077, CSA C22.2 No.235	AC 277 V AC 250 V AC 250 V DC 50 V	0.1...16 A ^(a) 0.1...16 A ^(b) 0.1...12 A ^(c) 0.1...16 A ^(d)	EA B, D	1 1 ^(a) , 2	1 1	

(a) 1- and 2-pole, all poles protected

(b) 1- and 2-pole

(c) 3-pole

(d) 1-, 2- and 3-pole

Technical data

For further details please see: www.e-t-a.de/ti_e

Voltage rating	AC 240 V; 3 AC 415 V; DC 50 V (UL: AC 250 V; 3 AC 250 V; DC 50 V)
Current ratings	0.1...20 A 1-pole 0.1...16 A 2- and 3-pole
Typical life 1-pole (IEC/EN 60934)	
AC 240 V:	0.1...20 A 30,000 operations at $1 \times I_N$, inductive
DC 50 V:	0.1...4 A 30,000 operations at $1 \times I_N$, inductive
	4.5...16 A 30,000 operations at $1 \times I_N$, resistive
DC 28 V:	0.1...20 A 30,000 operations at $1 \times I_N$, inductive
Typical life 2-pole (IEC/EN 60934)	
AC 240 V:	0.1...16 A 50,000 operations at $1 \times I_N$, inductive
DC 50 V:	0.1...16 A 50,000 operations at $1 \times I_N$, inductive
Typical life 3-pole (IEC/EN 60934)	
3 AC 415 V:	0.1...16 A 30,000 operations at $1 \times I_N$, inductive
Ambient temperature	-30...+60 °C (-22...+140 °F)
Insulation co-ordination (IEC 60664 and 60664 A)	rated impulse withstand voltage pollution degree 2.5 kV 2 reinforced insulation in operating area
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area AC 3,000 V current path/current path AC 1,500 V
Insulation resistance	> 100 MΩ (DC 500 V)

Interrupting capacity I_{CN} (EN 60934)

	I_N	U_N	I_{CN}
1, 2, 3-pole	0.1...2 A	AC 240 V/3 AC 415 V	$10 \times I_N$
1 pole	2.5...20 A	AC 240 V	200 A
2 pole	2.5...16 A	AC 240 V	300 A
3 pole	2.5...12 A	3 AC 415 V	150 A
3 pole	14...16 A	3 AC 415 V	130 A

Technical data

Rupture capacity I_{NC} (UL1077)

	I_N	U_N	I_{NC}
1, 2-pole	0.1...16 A	AC 250 V	3 500 A, C, 1
3-pole	0.1...12 A	3 AC 250 V	5 000 A, C, 1
1, 2-pole	0.1...16 A	AC 277 V	2 000 A, C, 1
1,2-pole	0.1...16 A	DC 50 V	2 000 A, C, 1

Degree of protection
(IEC 60529/DIN 40050) operating area IP40
terminal area IP00

Vibration 5 g (57-500 Hz) ± 0.38 mm (10-57 Hz)
to IEC 60068-2-6, test Fc
10 frequency cycles/axis

Shock 1-pole: 25 g (11 ms) 2 + 3-pole: 20 g (11 ms)
to IEC 60068-2-27, test Ea

Corrosion 96 hours at 5 % salt mist,
to IEC 60068-2-11, test Ka

Humidity 240 hours at 95 % RH,
to IEC 60068-2-78, test Cab

Mass approx. 45 g (three pole)
approx. 31 g (double pole)
approx. 17 g (single pole)

E-T-A® 3130 Thermal Overcurrent Circuit Breaker

Ordering information - 1-pole

Type No.
3130 single pole thermal circuit breaker

Mounting

F Snap-in frame

Frame

- 1 Standard, panel cut-out 14.6 x 34 mm
- 3 Panel cut-out 18.0 x 35-37 mm

Number of poles

- 1 single pole, thermally protected

Frame mounting

For Frame 1, snap-in, panel thickness 1.0-2.5 mm, color

- 0 black
- 2 white
- 4 grey

For Frame 3, snap-in, panel thickness 1.5-3.2 mm, color

- 1 black
- 3 white
- 5 grey

Terminal design

P7 blade terminals 6.3 x 0.8 mm

H7 for terminals 1.1, 2.1 3.1 terminal screws M 3.5
for terminals 1.2, 2.2, 3.2 blade terminals 6.3 x 0.8 mm

Characteristic curve

T1 thermal

Actuator style

W rocker switch with marking „I“ and „O“
moulded in

Actuator colour

Rocker opaque without illumination

- 01 Q black
- 02 Q white
- 04 Q red

Rocker translucent white,
with LED illumination

- 12 Q G green
- 12 Q R red
- 12 Q Y yellow

Rocker translucent color,
with LED illumination

- 14 Q R red
- 15 Q Y orange
- 19 Q G green

Illumination voltage range⁽¹⁾

- 2 10 - 14 V DC
- 3 20 - 28 V DC
- 6 90 - 140 V AC
- 7 185 - 275 V AC
- 9 225 - 330 V AC

Current ratings

- 0.1...20 A

3130 - F 1 1 0 - P7 T1 - W 14 Q R 3 - 5 A ordering example

Ordering information - multipole

Type No.
3130 multipole thermal circuit breaker

Mounting

F Snap-in frame

Frame

- 1 Standard, panel cut-out size depending on no. of poles

A version for X3130

Number of poles

- 2 2-pole thermally protected

- 3 3-pole thermally protected

- 5 2-pole, 1-pole thermally protected

Frame mounting

0 Snap-in frame, black, panel thickness

1.0-2.5 mm for frame size 1

A 2-pole, version for X3130

Terminal design

P7 blade terminals 6.3 x 0.8 mm
(characteristic curve T1)

H7 for terminals 1.1, 2.1 3.1 terminal screws M 3.5
for terminals 1.2, 2.2, 3.2 blade terminals 6.3 x 0.8 mm

Characteristic curve

T1 thermal

Actuator style

W rocker switch with marking „I“ and „O“
moulded in

Actuator colour

Rocker opaque without illumination

- 01 Q black
- 02 Q white
- 04 Q red

Rocker translucent color,
with LED illumination

- 14 Q R red
- 15 Q Y orange
- 16 Q T blue

- 19 Q G green

Illumination voltage range⁽¹⁾

- 2 10 - 14 V DC
- 3 20 - 28 V DC
- 6 90 - 140 V AC
- 7 185 - 275 V AC
- 8 320 - 450 V AC
- 9 225 - 330 V AC⁽²⁾

Current ratings

- 0.1...16 A

3130 - F 1 3 0 - P7 T1 - W 14 Q R 7 - 5 A ordering example

Please observe our minimum ordering quantities

(1) N/A for non-illuminated version

(2) for 2-pole variant only

Custom designed versions


Looking for a version you cannot find in our order numbering key?
Please get in touch. We will be pleased to find a solution for you.

E-TA® 3130 Thermal Overcurrent Circuit Breaker


Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance per pole (Ω)	Current rating (A)	Internal resistance per pole (Ω)
0.1	94	4	0.0435
0.2	24	5	0.0325
0.3	12	6	0.0215
0.4	5.30	7	0.0165
0.5	4.20	7,5	0.0165
0.8	1.50	8	0.0165
1	0.9	10	< 0.02
1.2	0.80	12	< 0.02
1.5	0.45	14	< 0.02
1.75	0.36	15	< 0.02
2	0.27	16	< 0.02
2.5	0.0785	18	< 0.02
3	0.0595	20	< 0.02
3.5	0.0565		


Dimensions 3130-F311...

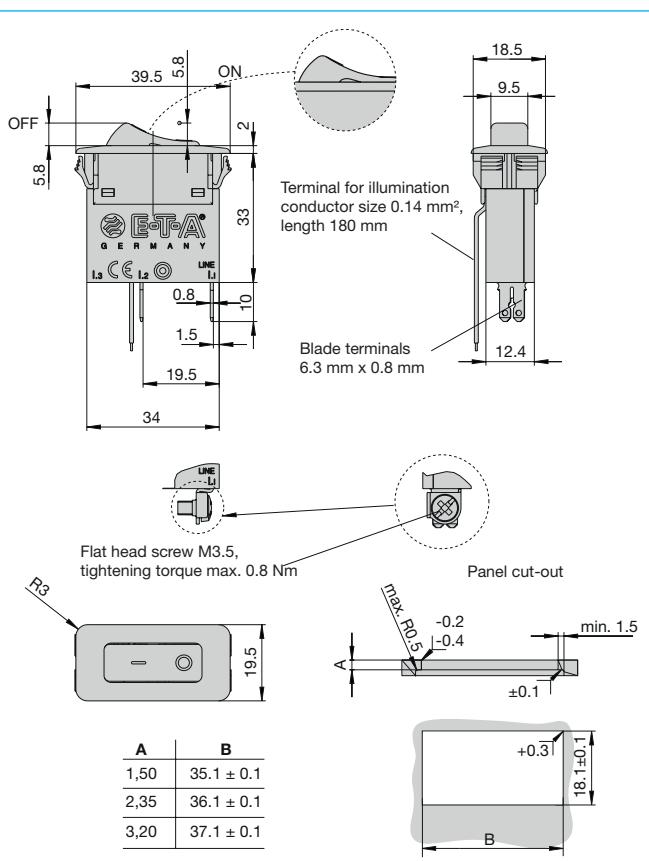

Dimensions 3130-F110...

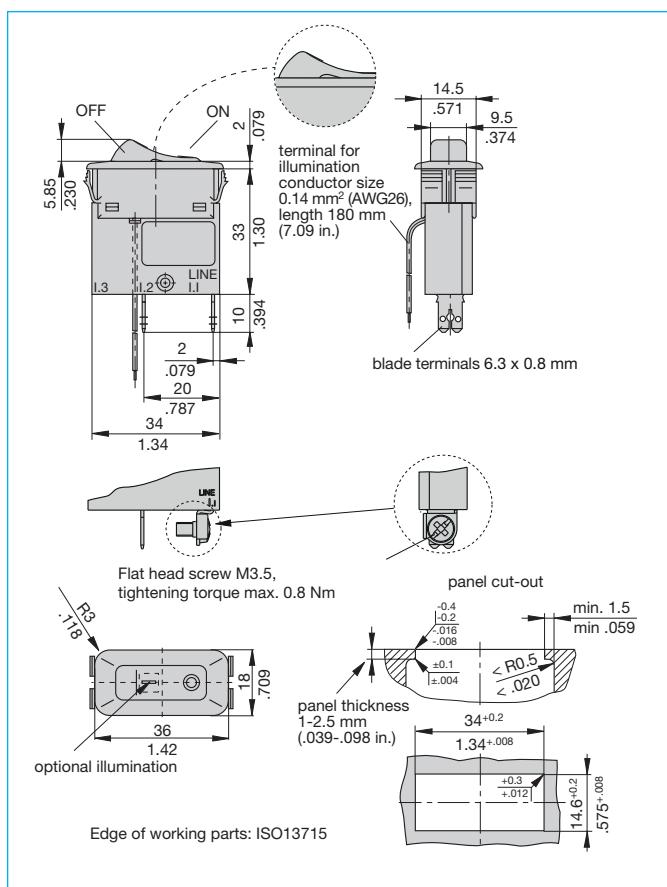


Dimensions 3130-F120...

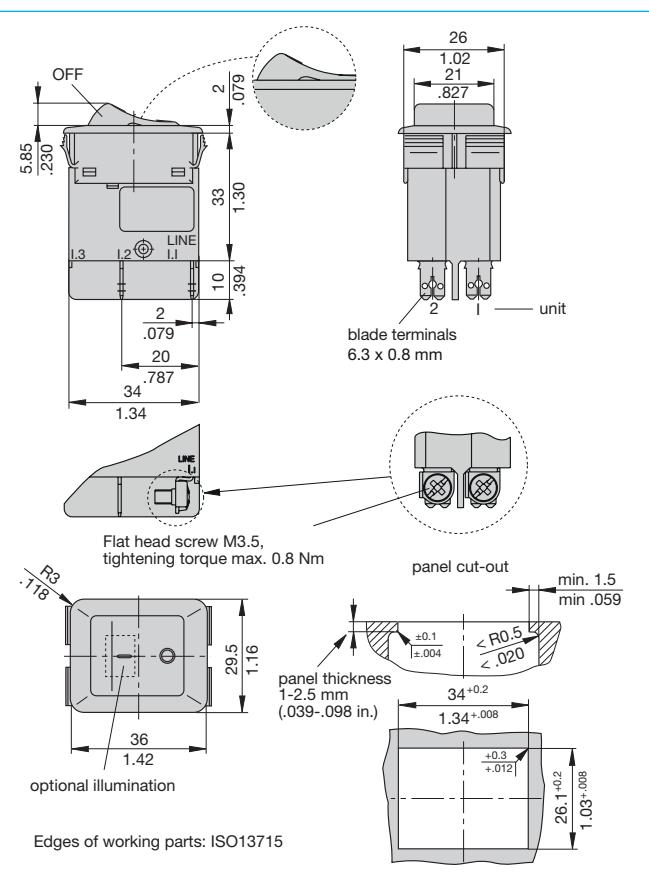


E-T-A® 3130 Thermal Overcurrent Circuit Breaker


Dimensions 3130-F130...

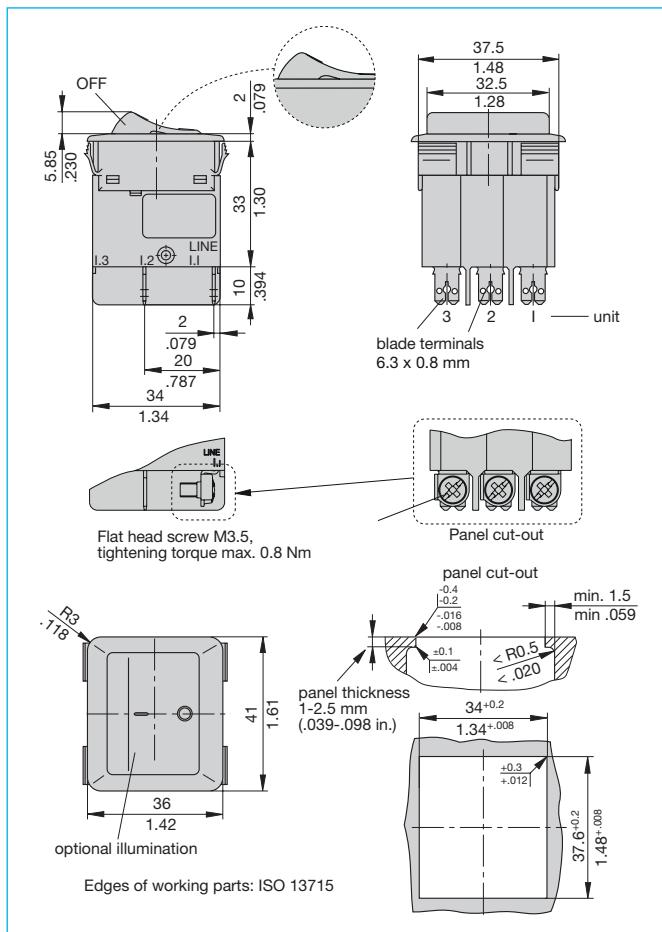

Internal connection diagrams

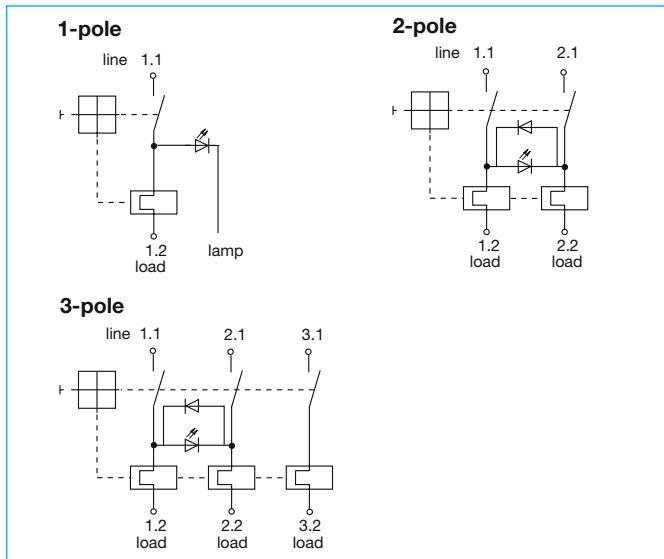


Installation drawing 3130-F1...

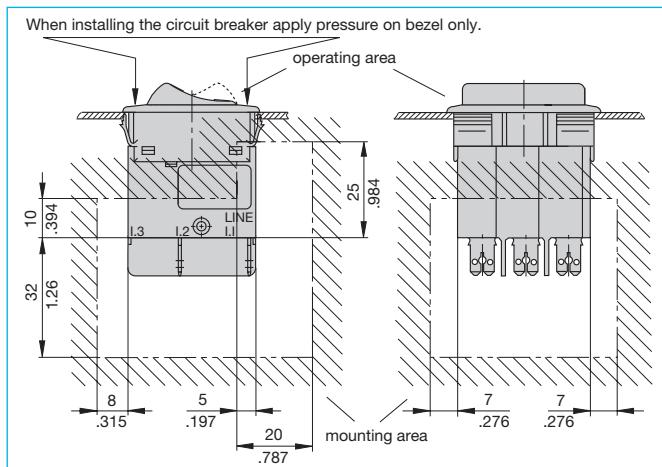

Accessories 3130-F130...


Splash cover, transparent, for 3-pole version
X 221 258 01 (IP54), comprising bezel Y 306 109 01 and transparent cover Y 306 108 01

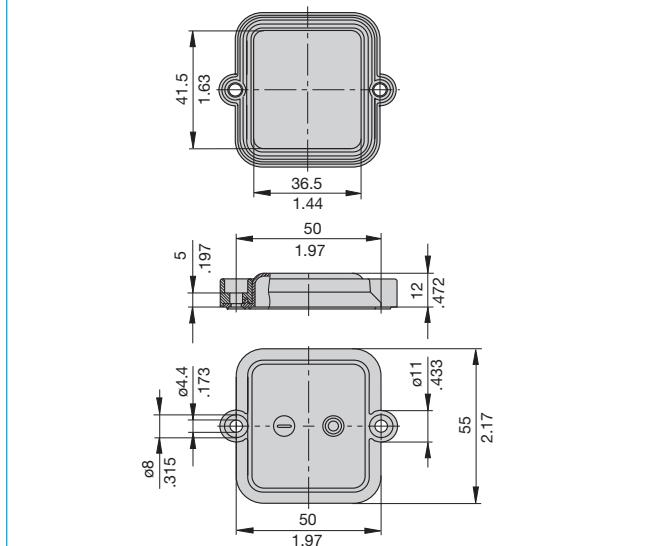

Typical time/current characteristics


Multipole types: all poles symmetrically loaded.
 With single pole overload, thermal tripping will be at approx. $1.54 \times I_N$ with 2-pole devices and at approx. $1.68 \times I_N$ with 3-pole devices.

0.1...2 A

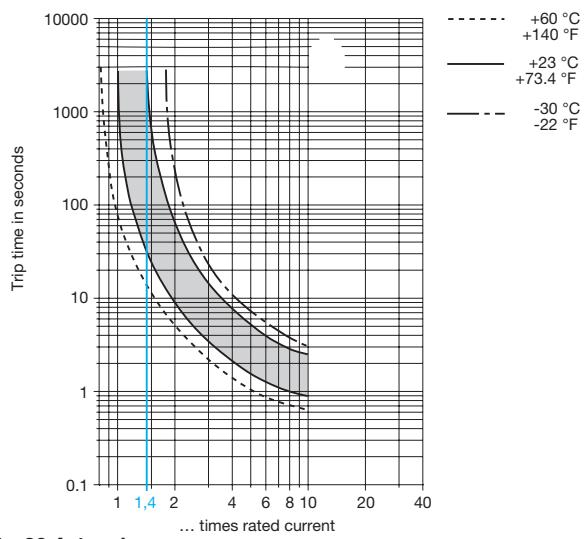

2.5...20 A 1-pole

2.5...16 A 2- and 3-pole

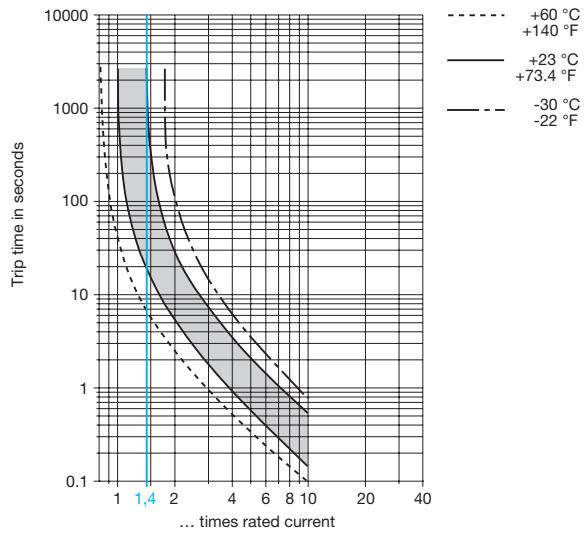

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient temperature	°F °C	-22 -30	-4 -20	+14 -10	+32 0	+73.4 +23	+104 +40	+122 +50	+140 +60
Derating factor		0.8	0.84	0.88	0.92	1	1.08	1.14	1.23

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

Description

The space-saving X3130 Power Entry Module with double pole circuit breaker 3130-FA.A combines three functions within a single component: A C14 appliance inlet and rocker switch with resettable overcurrent protection; screw mounting from the front or the rear.

Typical applications

Electrical medical apparatus, laboratory equipment, professional audio equipment and office machines.

Ordering information

Type No.

X3130 Power Entry Module for circuit breaker type 3130-FA.A

Module

A appliance inlet C14

Design

04 screw-type mounting

Accessories

00 without

Version

01 not wired; mounting position 3130:

0 to connector

11 wired; mounting position 3130:

0 to connector

Delivery condition

M module supplied with
circuit breaker FA.A

X3130 - A 04 00 01 - M Ordering example

Approvals

X3130-A – C14-appliance inlet

Authority	Standard	Rated voltage	Current ratings
ENEC	IEC/EN 60320-1	AC 240 V	10 A
UL/CSA	UL 60320-1, CSA C22.2 no. 60320-1	AC 250 V	15 A
CQC	CCC	AC 250 V	10 A


Please note: the current rating of the circuit breaker must not exceed the max. current of the appliance inlet, depending on approval.

Complete module X3130-A also available with approval according to UL 60320-1 at max. current of 15 A.


Technical data

Rated voltage	AC 250 V
Rated current	10 A (IEC) 15 A (UL/CSA)
Ambient temperature	-25 °C ... 70 °C
Number of poles	L, N + ground
Cable cross section	max. 1.5 mm ²
Degree of protection	Class I
Mounting method	screw-type mounting (front or rear)
Terminal design	blade terminals 6.3 x 0.8 mm
Housing material	thermoplastics, black UL94V-0
Appliance inlet	C14 according to IEC/EN 60320-1
Switch	circuit breaker type 3130, 2-pole

Dimensions

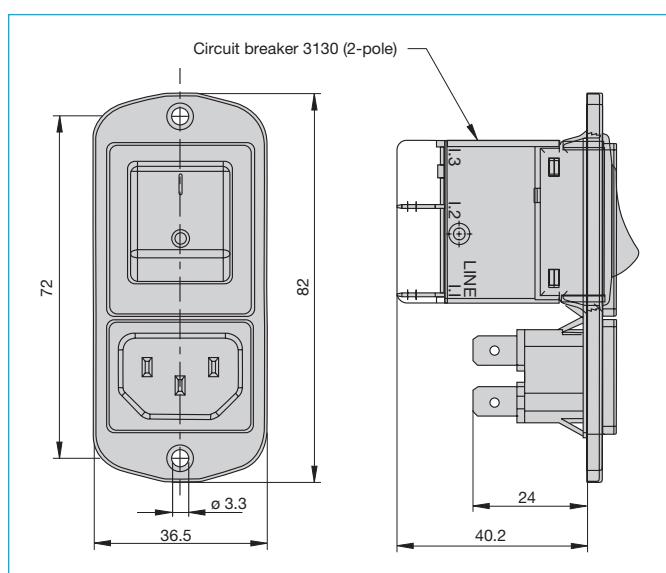

Mounting hole X3130

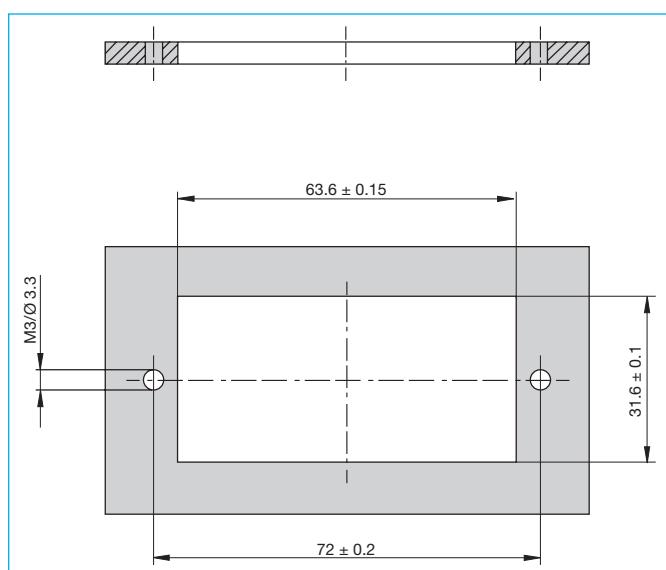

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.