



This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

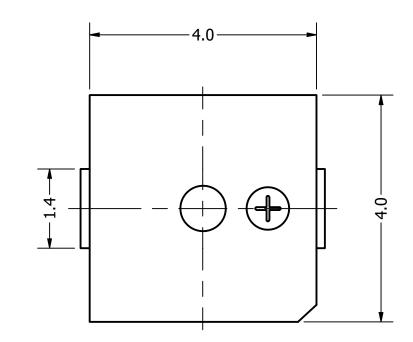


Side View

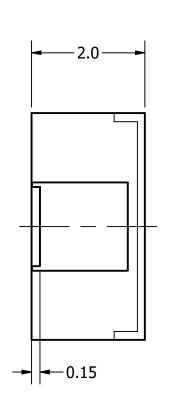

Bottom View

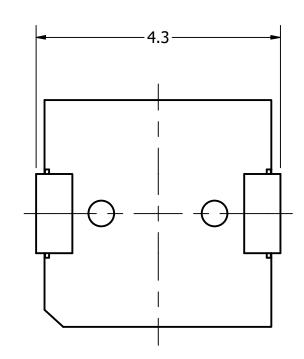

Land Pattern

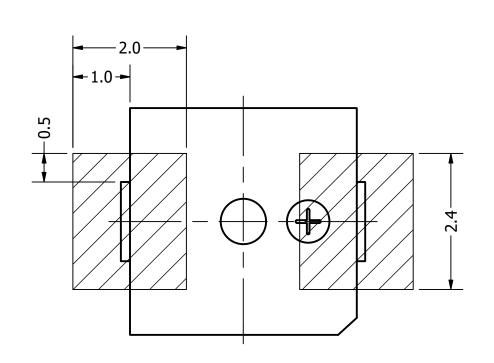

Items	Specifications	Conditions				
Min. Sound Pressure Level	70	dB (@ 10cm)				
Resonant Frequency	4,000	Hz				
Rated Voltage	3	V				
Voltage Range	2 ~ 4	V	REVISION HISTORY			
Coil Resistance	17	Ω	REV	DESCRIPTION	DATE	APPROVED
Max. Rated Current	90	mA		Released from Engineering	7/22/2019	C.E.
Storage Temperature	-40 ~ +85	°C	NOTES			
Operating Temperature	-40 ~ +85	°C	1) All dimensions are in mm unless otherwise noted			
Connection Method	Surface Mount Pads		2) All tolerances are ± 0.5 mm unless otherwise noted			
Mount Type	Surface Mount		3) All parts meet RoHS			
Housing Material	LCP		4) Subject to change or redrawn without notice			
Weight	0.1	g				