


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| WIDTH | HEIGHT | DEPTH | WEIGHT |
|-------|--------|-------|-----------------|
| 24.0" | 24.0" | 12.0" | 80 LBS 36 KG |

| PANDUIT P/N | ENCLOSURE TYPE | DOWNLINK PATCH CORDS TYPE |
|-------------|----------------|---------------------------|
| Z22C-6 | 316 STAINLESS | UTP COPPER |
| Z22C-6S | 316 STAINLESS | STP COPPER |
| Z22C-S | 4/12 STEEL | UTP COPPER |
| Z22C-SS | 4/12 STEEL | STP COPPER |

NOTES:


- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- ENCLOSURE INCLUDES:
 - 2- CABLE MANAGEMENT SIDE PANELS
 - 1- SLACK PLATE
 - 1- BLANK GLAND PLATES
 - 1- 1/2" CONDUIT PLUG FOR POWER ENTRY
 - 2- EXTERNAL MOUNT ANGLES
 - 1- AC WIRING COVER
 - 1- DIN RAIL FOR SWITCHES (17.5")
 - 1- DIN RAIL FOR POWER (21.5")
 - 1- FIBER SLACK SPOOL
 - 1- 6 PORT FIBER SURFACE MOUNT BOX
 - 1- STRAIN RELIEF BAR
 - 1- DIN RAIL MOUNTED COPPER PATCHING MODULE
- 10- CABLE MANAGEMENT L RINGS
- 1- GROUND BAR
- 8- CAT 6 COPPER PATCH CORD, 3FT
- 8- CAT 6 MINI-COM COPPER MODULES
- 2- LC FIBER OPTIC PATCH CORDS, 1M
- 6- LC FIBER OPTIC ADAPTER MODULES
3. THE PRE-CONFIGURED ZONE SYSTEM IS WALL MOUNTABLE WITH THE OPTION TO USE OUTSIDE EXTERNAL MOUNT ANGLES.
4. 316 STAINLESS STEEL ENCLOSURES ARE RATED NEMA 4X.
5. ALL ENCLOSURES ARE UL TYPE 4/12 AND IP66 RATED.
6. STEEL AND STAINLESS STEEL ENCLOSURES ARE MADE FROM 16 GAUGE STEEL.

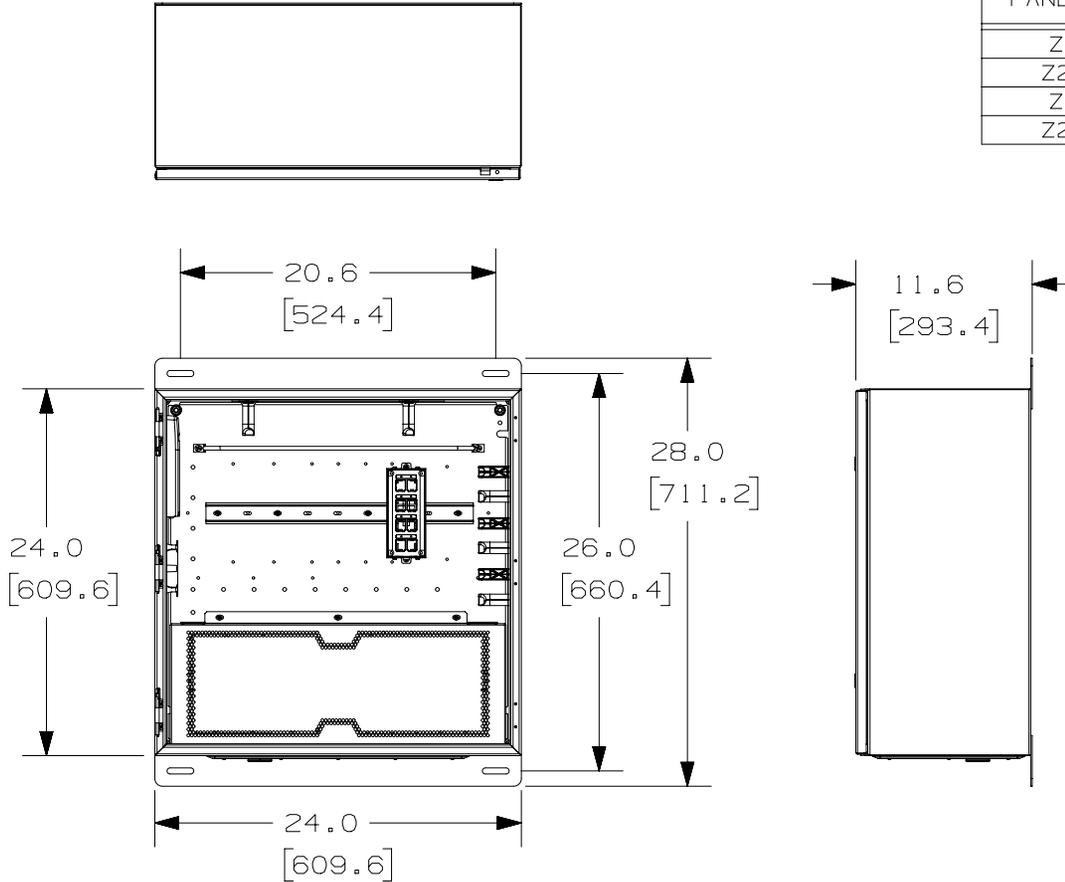

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|----------|-----|------|------|----------------------|----------|
| 02A | 10/27/15 | NWW | DAJP | TIMH | RELEASED TO CUSTOMER | 13V366AH |

| | | | |
|---|----------|--|-------|
| TITLE | | Z22C - ** PRE-CONFIGURED ZONE ENCLOSURE CUSTOMER DRAWING | |
| ITEM REVISION NAME | | 13V366AH/02 | |
| DATASET FILE NAME | | 13V366AH_DC_02A | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) | | MATERIAL: | |
| .X ± | | .XXX ± | |
| .XX ± | | ANGLES ± | |
| | | DRAWING NUMBER: | |
| THIRD ANGLE PROJECTION | | 13V366AH_DC | |
| DRAWN BY | DATE | CHK | SCALE |
| NWW | 12/17/14 | MJD | NONE |
| SHT 1 OF 2 | | | SIZE |
| | | | A |

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

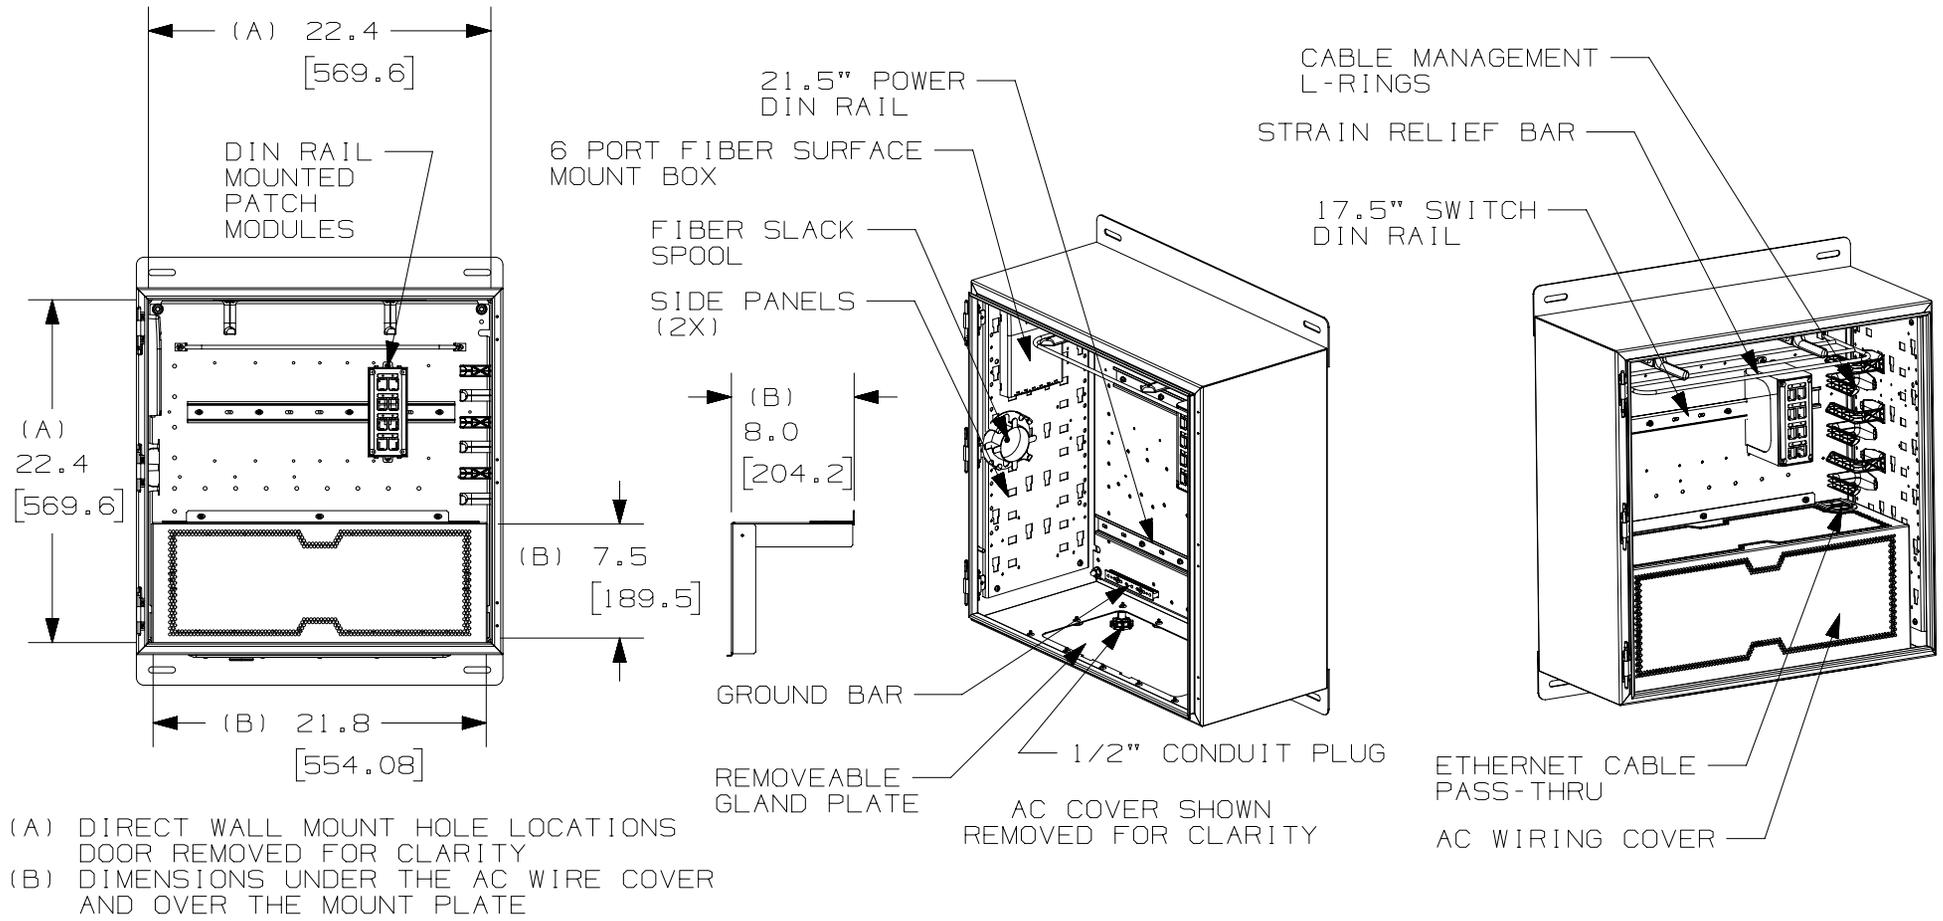

| 02A | 10/27/15 | NWW | DAJP | TIMH | REFER TO SHEET 1 | 13V366AH |
|-----|----------|-----|------|------|------------------|----------|
| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |

| | |
|--|-------------------------|
| TITLE Z22C - ** PRE-CONFIGURED ZONE ENCLOSURE CUSTOMER DRAWING | |
| ITEM REVISION NAME 13V366AH/02 | PANDUIT |
| DATASET FILE NAME 13V366AH_DC_02A | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) | |
| .x ± .1 [2.54] | .xxx ± .005 [.127] |
| .xx ± .01 [.25] | ANGLES ± 5° |
| THIRD ANGLE PROJECTION | |
| DRAWING NUMBER: 13V366AH_DC | |
| DRAWN BY NWW | DATE 12/17/14 |
| CHK MJD | SCALE NONE |
| SHT 2 OF 2 | |
| SIZE A | |