





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

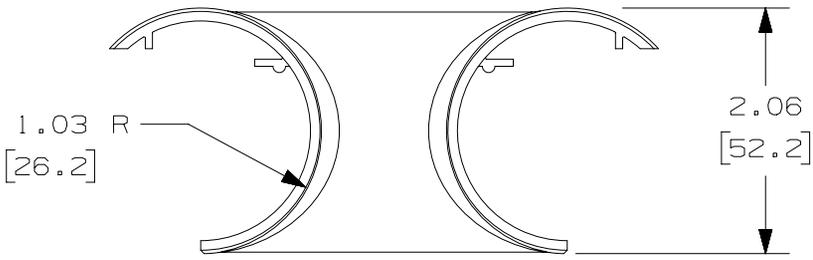

PANDUIT P/N	WEIGHT
TRC2BL	.05 LBS/EACH (23 kg/EACH)

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. DIMENSIONS IN PARENTHESES ARE METRIC.
4. THE FIBER-DUCT 2x2 AND PANDUCT FS AND G 2x2 WIRING DUCT BEND RADIUS CONTROL TRUMPET ALLOWS FOR CABLES TO SPILL OUT OF THE FIBER-DUCT 2x2 AND PANDUCT TYPES FS AND G 2x2 WIRING DUCT WHILE MAINTAINING A 1" (25.4) BEND RADIUS.

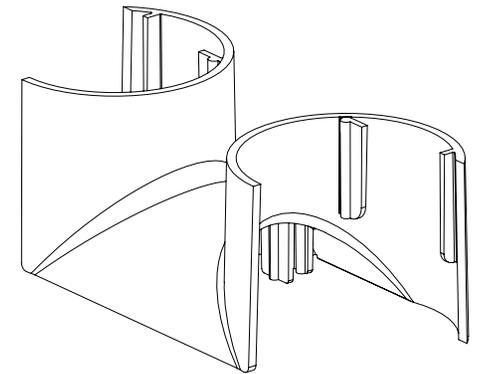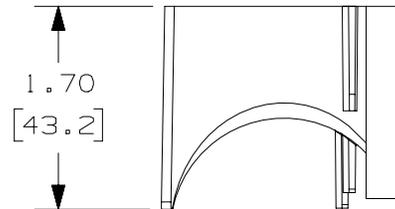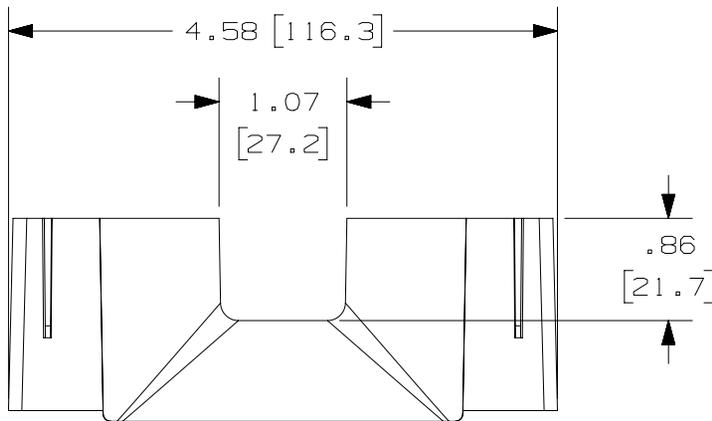


TITLE
PANDUIT TYPES G, FS, E OR S FIBER-DUCT 2X2 BEND RADIUS CONTROL TRUMPET (TRC2BL)

CUSTOMER DRAWING

ITEM REVISION NAME
D37275BB/03

DATASET FILE NAME
D37275BB/03



THIRD ANGLE PROJECTION

MATERIAL
ABS

DRAWING NUMBER
37275-02

4	3-20-18	LEE	DWR	MS	K. DIM WAS 1.00 L. DIM WAS 4.60 UPDATED TITLE BLOCK, SEE PREVIOUS REVISION FOR HISTORY	V09001PZ
---	---------	-----	-----	----	---	----------

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

DRAWN BY MSO	DATE 1-31-00	CHK JKG	SCALE NONE	SHEET 1 OF 1	SIZE A
------------------------	------------------------	-------------------	----------------------	--------------	------------------