

- Economical And Easy To Install
- Cuts Easily With Scissors
- Reflects Radiant Heat
- Insulates Delicate Wires And Components
- Resists Gasoline And Engine Chemicals

Put-Ups

Nominal Size	Part #	Wall Thickness ±0.006"	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1"	TSN1.00SV	0.025"	250'	100'	Silver (SV)	1.60
1 1/2"	TSN1.50SV	0.025"	250'	100'	Silver (SV)	2.00
2"	TSN2.00SV	0.025"	250'	100'	Silver (SV)	2.75
3"	TSN3.00SV	0.025"	250'	100'	Silver (SV)	4.30
4"	TSN4.00SV	0.025"	250'	100'	Silver (SV)	5.60
5"	TSN5.00SV	0.025"	200'	100'	Silver (SV)	7.60
6"	TSN6.00SV	0.025"	100'	50'	Silver (SV)	9.20
6 7/8"	TSN6.88SV	0.025"	100'	50'	Silver (SV)	10.90

## Reflective Aluminized Surface Bonded To Insulating Fiberglass

THERMASHIELD® creates a buffer between your wires, hoses and cables and the high temperature environments they are required to perform in. ThermaShield® is engineered by laminating an aluminum heat shield to a layer of strong fiberglass insulation. This system provides superior protection from radiant heat by reflecting it away from sensitive electronics, wiring and hoses.

THERMASHIELD® FLAT (TSN) protects surfaces exposed to extreme heat with TSN. An aluminum laminated fiberglass sheet with a full coating of permanent, high temperature adhesive, applies directly to any clean surface. Ideal solution for protecting delicate electronic component boxes mounted close to engines or other heat sources. When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure.



Cut Cleanly  
Scissors

Material

Aluminum Laminated Fiberglass

Grade

TSN

Wall Thickness


.025"

Drawing Number

TF001TS-WD

Colors Available:  
Silver (SV)

When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure.

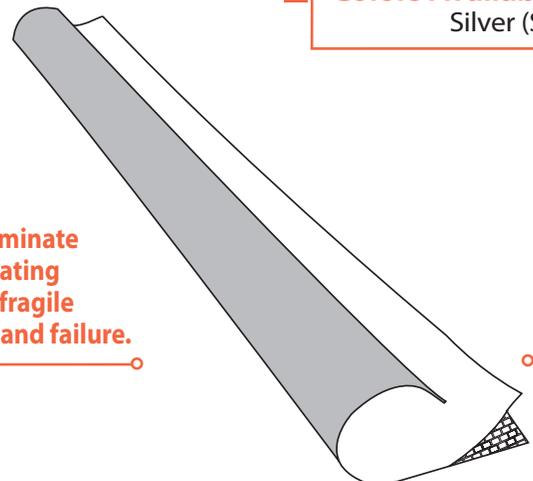

**ABRASION**  **FLAMMABILITY**

**Abrasion Resistance**  
**Very High**

Rating \_\_\_\_\_ Non Combustible  
Will not burn

**Abrasion Test Machine**  
**Taber 5150**

**Abrasion Test Wheel**  
**Calibrase H-18**

**Abrasion Test Load**  
**500g**

**Room Temperature**  
**70°F**

**Humidity**  
**57%**

**Foil Layer Worn Through**  
**1,000 Test Cycle**

**Fiberglass Layer Worn Through - Material Destroyed**  
**1,300 Test Cycles**

**Pre-Test Weight**  
**10,804.3 mg**

**Post-Test Weight**  
**9,918.5 mg**

**Test End Loss Of Mass Point Of Destruction**  
**885.8 mg**

 **CHEMICAL RESISTANCE**


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents \_\_\_\_\_ 1  
Aliphatic Solvents \_\_\_\_\_ 1  
Chlorinated Solvents \_\_\_\_\_ 1  
Weak Bases \_\_\_\_\_ 1  
Salts \_\_\_\_\_ 1  
Strong Bases \_\_\_\_\_ 1  
Salt Water 0-S-1926 \_\_\_\_\_ 1  
Hydraulic Fluid MIL-H-5606 \_\_\_\_\_ 1  
Lube Oil MIL-L-7808 \_\_\_\_\_ 1  
De-Icing Fluid MIL-A-8243 \_\_\_\_\_ 1  
Strong Acids \_\_\_\_\_ 2  
Strong Oxidants \_\_\_\_\_ 2  
Esters/Ketones \_\_\_\_\_ 1  
UV Light \_\_\_\_\_ 1  
Petroleum \_\_\_\_\_ 1  
Fungus ASTM G-21 \_\_\_\_\_ 1  
Halogen Free \_\_\_\_\_ Yes  
RoHS \_\_\_\_\_ Yes

**Melt Point**  
ASTM D-2117  
**2,048°F (1,120°C)**

**Maximum Continuous**  
Mil-I-23053  
**491°F (255°C)**

**Minimum Continuous**  
**-76°F (-60°C)**

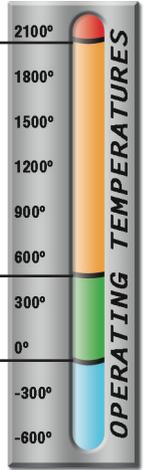

 **PHYSICAL PROPERTIES**

Flammability Rating \_ Non Combustible  
Recommended Cutting \_\_\_\_\_ Scissor  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .025"