



**SHARP's New Line
of MCUs and
System-on-Chips**

APPLICATIONS:

- PDAs
- GPS
- Web Pads
- Media Players
- Test and Measurement

LH79520 System-on-Chip Solution for Color LCD Applications

FEATURES


- ARM720T™ Core
 - 32-bit ARM7TDMI™ RISC Core
 - 8KB Cache
 - MMU
- High Performance (77.4 MHz)
- 32KB On-Chip SRAM
- Clock and Power Management
 - 32 kHz Oscillator for RTC
 - 14.7 MHz Oscillator and PLL for System Clock
- Programmable Color LCD Controller
 - Up to SVGA (800 × 600) 16-bit Resolution
 - Up to XGA (1,024 × 768) 8-bit Resolution
 - Supports STN, Color STN, AD-TFT, TFT
 - Up to 64 k Colors
- Flexible External Memory Interface
 - SDRAM support
 - SRAM/Flash/ROM support
- DMA (four channels)
- Synchronous Serial Interface (SSI)
- Four Counter/Timers
- Two Pulse Width Modulators (PWM)
- Three UARTs with Classic IrDA
- Real Time Clock (RTC)
- Up to 64 General Purpose I/Os (5 V Tolerant)
- Programmable Vectored Interrupt Controller
- Watchdog Timer
- JTAG Debug Interface and Boundary Scan
- Low Power Modes
 - Active Mode: 55 mA (MAX.)
 - Standby Mode: 35 mA (MAX.)
 - Sleep Mode: 5.5 mA (MAX.)
 - Stop Mode: 18 µA
- Operating Voltage
 - 1.8 V Core
 - 3.3 V Input/Output
- Temperature
 - -40°C to +85°C Industrial
- 176-pin 22 x 22 mm LQFP

DESCRIPTION

The LH79520, powered by an ARM720T, is a complete System-on-Chip that breaks the cost/performance barrier with a high level of integration to satisfy a wide range of requirements and expectations. The LH79520 combines a 32-bit ARM7TDMI RISC, 8KB Cache, MMU, color LCD controller, and local SRAM. Also included are a number of essential peripherals such as a DMA Controller, Serial and Parallel Interfaces, Infra-red Support, Counter/Timers, Real Time Clock, Watchdog Timer, Pulse Width Modulators, and an on-chip Phase Lock Loop.

This high level of integration lowers overall system cost, reduces development cycle time and accelerates product introduction. Featuring 5 V tolerant inputs, the LH79520's fully static design, power management unit, low voltage operation (1.8 V Core, 3.3 V Input/Output), on-chip PLL, and very low power RISC core provide high performance at a low current draw.


HANDHELD PDA APPLICATION EXAMPLE

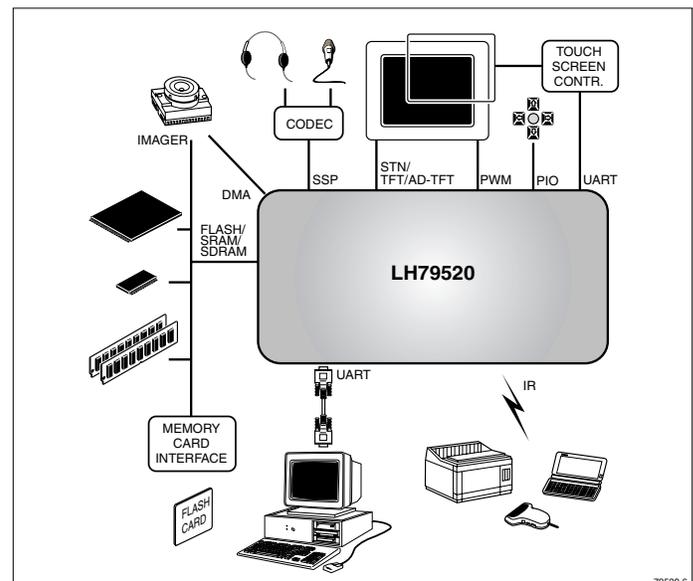

PRODUCT INFORMATION

SHARP

LH79520 BLOCK DIAGRAM

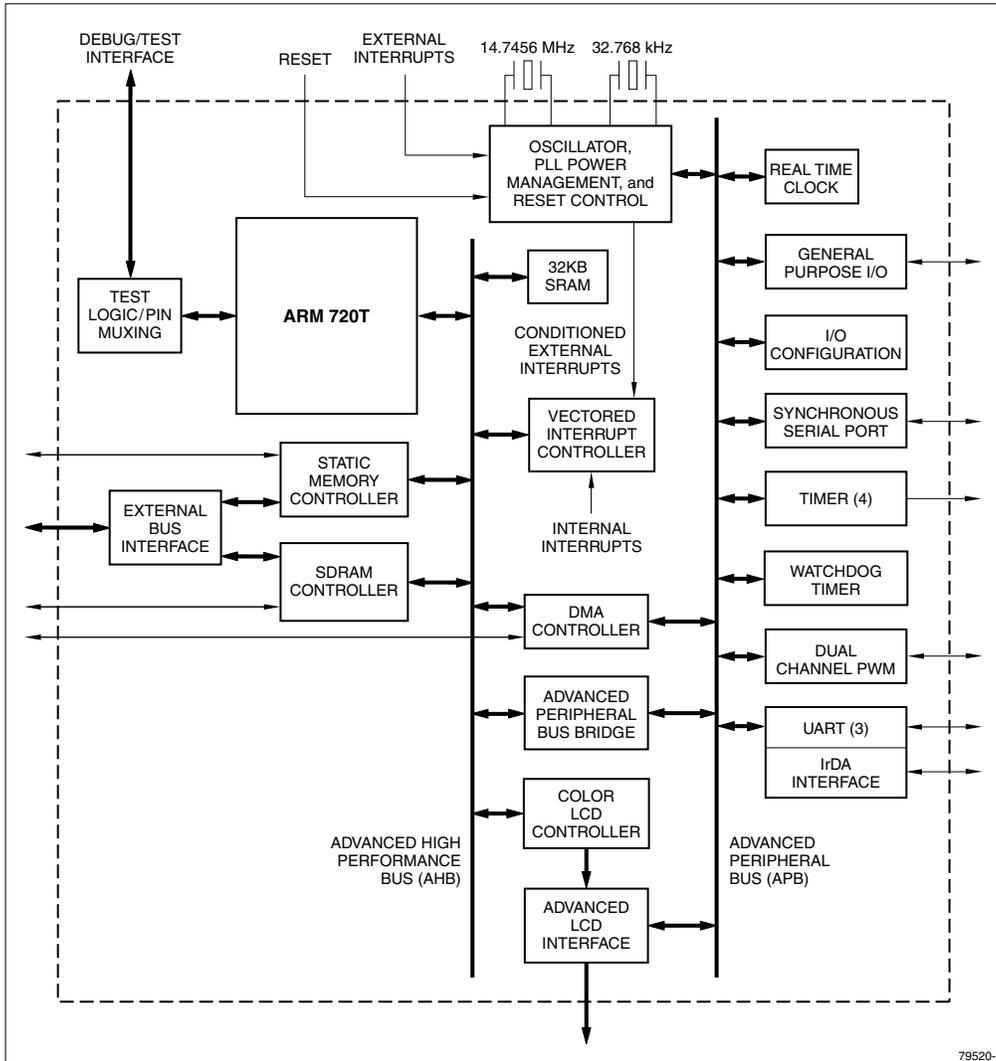

79520-1

SHARP[®]

MICROELECTRONICS OF THE AMERICAS

Regional Sales Offices

North American Headquarters

Camas, WA
Ph (360) 834-2500
Fax (360) 834-8903

West

Huntington Beach, CA
Ph (714) 903-4600
Fax (714) 903-0295
San Diego, CA
Ph (858) 597-0982
Fax (858) 597-8701
San Jose, CA
Ph (408) 436-4900
Fax (408) 436-0924

East

Ft. Lauderdale, FL
Ph (954) 267-8883
Fax (954) 267-0254
Burlington, MA
Ph (781) 270-7979
Fax (781) 229-9117
Carey, NC
Ph (919) 460-0695
Fax (919) 460-0795
Pittsburgh, PA
Ph (412) 381-1191
Fax (412) 381-1192
Yardley, PA
Ph (215) 321-5530
Fax (215) 321-5534

Central

Schaumburg, IL
Ph (847) 925-9150
Fax (847) 925-9172
Troy, MI
Ph (248) 458-1527
Fax (248) 391-6165
Austin, TX
Ph (512) 349-7262
Fax (512) 349-7002
Irving, TX
Ph (972) 582-1712
Fax (972) 580-7537
Houston, TX
Ph (281) 955-9909
Fax (281) 955-9910
Muskego, WI
Ph (414) 529-9568
Fax (414) 529-9569

Europe

SHARP Microelectronics
Europe
Hamburg, Germany
Ph (49) 40-2376-2286
Fax (49) 40-2376-2232

Asia

SHARP Corporation
Osaka, Japan
Ph (81) 6-6621-1221
Fax (81) 6117-725300

Product Information: 1-800-642-0261

World Wide Website: <http://www.sharpsma.com>

Specifications are subject to change without notice. Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.