
THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

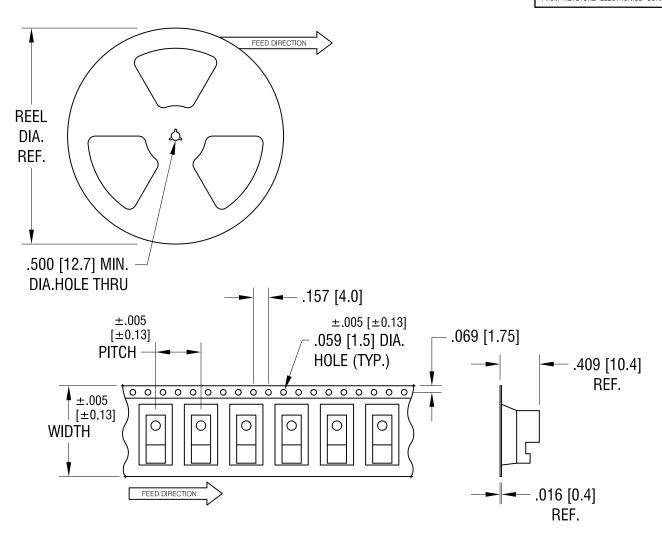

NOTES:


TAPE AND REEL SPECIFICATIONS:

1 TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD .945 [24.0] WIDE; .472 [12.0] PITCH


2 REEL:

	13.0 [330.2] DIA. 400 PIECES OF PART NO. 5230 PER REEL.							
			KEYSTONE ELECTRONICS CORP. www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900 PART NAME					
			SM BATTERY CONTACT, ON TAPE					
			MATERIAL AS NOTED					
8.6.07	CHANGE AS PER ECN 07-045	В	FINISH AS NOTED	DRN BY	BOONE LN	DATE 2.9.01		
11.1.05	CHANGE AS PER ECN 05-077	Α	TOLERANCES INCH [MM] COD	E DWG 1		X		
DATE	DESCRIPTION	REV.	DECIMAL ± .015 [± 0.38] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED		5	5230TR		

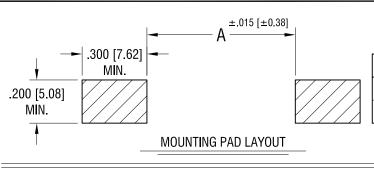

FOR BATTERY SIZE:	'A' DIM.			
AAA	1.959 [49.76]			
AAAA	1.864 [47.35]			

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

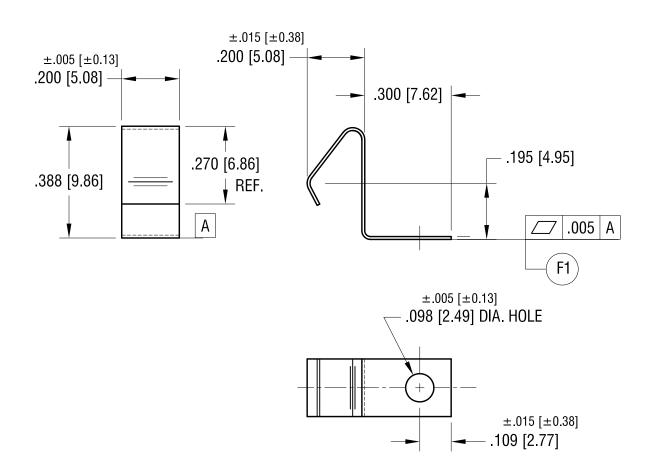

NOTE:

1. HEAT TREAT TO SPRING TEMPER.

			1111111 11 11 11 11 11 11 11 11 11 11 1				
			PART NAME				
			BATTERY CONTACT, SURFACE MOUNT				
			MATERIAL				
			.010 [0.25] ANNEALED SPRING STEEL				
7.06.20	ADD FLATNESS (F1) CHANGE AS PER ECN 20-061	 F	FINISH TIN NICKEL PL	ΛTE	BOONE DATE 3.16.98		
7.00.20	CHANGE AS FER ECH 20-001	1	I IIN NICKEL FL	AIL	APP'D SCALE 3X		
9.13.04	CHANGE AS PER ECN 04-091	E	TOLERANCES INCH [MM] DECIMAL ± .010 [± 0.25]	CODE	DWG NQLN		
DATE	DESCRIPTION	REV.	DECIMAL ± .010 [± 0.25] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	С	5230		
	_		_		_		

KEYSTONE ELECTRONICS CORP.www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500