


WS8351A/WS8352A/WS8354A-DST

350MHz Single, Dual & Four Channel Arbitrary Function Generators



Tabor's WS835x is a 350MHz single, dual & four channel generator with the functionality of a function, arbitrary, modulation and pulse/pattern generator, all in one easy to use, high performance, compact stand alone bench top, which enables engineers to test analog, digital and mixed signals devices with a single instrument.

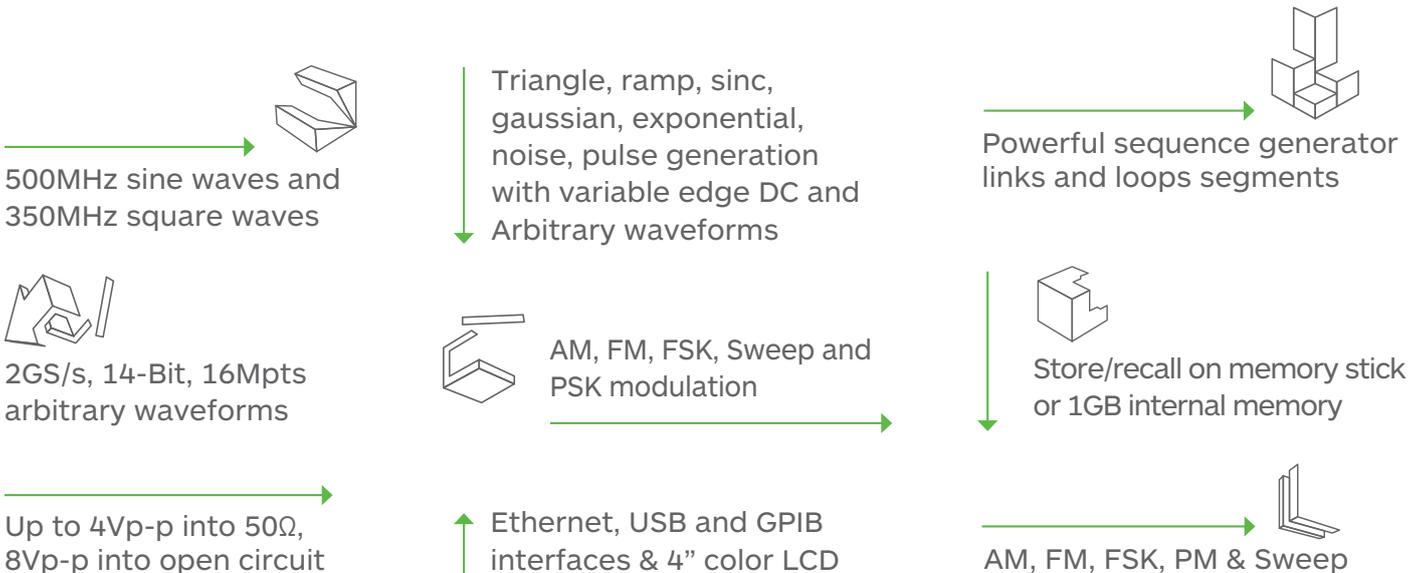

Standard Waveforms

The WS835xA-DST has 11 built-in functions for quick and easy waveform generation. Front panel operations allows for easy selection and editing of all waveform parameters. All the standard waveforms can reach up to 125MHz with Sine and Square going as high as 350MHz.

User Defined Waveforms

For more advanced users the WS835xA-DST with its 14-bit vertical resolution offers a standard 16Mpts memory depth and a 2GS/s sample clock for designing waveforms, with the ability to control and edit the value of each and every point any wave is possible.

Modulation Waveforms

In addition to the capability of generating any shape and style of waveform with the arbitrary waveform generation power, the series can also do standard modulation schemes such as FM, AM, FSK, sweep and PSK, without sacrificing the power of the instrument control and output run modes.

Pulse / Pattern Creation

Generating complex pulse trains has never been easier. The Pulse Composer is a powerful built-in tool that converts the WS835xA-DST to a very sophisticated Pulse/Pattern Generator, allowing to create literally any complex pulse train / pattern, whether it's a single pulse, multi-level, linear-points, initialization or preamble pattern definition, arbitrary bit design, user-defined or even standard random patterns with programmable resolution, so it doesn't matter if your application is radar communications, nanotechnology or serial bus testing, the pulse/pattern composer is the right tool for your application. Moreover, all the WS835xA-DST advanced trigger modes are applicable, hence one can choose to use the "step" mode to advance every bit independently or the "once" mode to advance a complete data block in one trigger event, enabling even more applications, such as trigger, clock and data protocols.

WS8351A/WS8352A/WS8354A-DST

350MHz Single, Dual & Four Channel Arbitrary Function Generators

Specifications

CONFIGURATION		PULSE		SEQUENCED WAVEFORMS	
Output Channels:	1, 2 or 4, semi-independent	Pulse Mode:	Single or double, programmable	Sequencer Steps:	1 to 1k
STANDARD WAVEFORMS		Polarity:	Normal, inverted or complement	Segment Loops:	1 to 1M
Frequency Range:		Period:	4ns to 1.6s	Advanced Modes:	Continuous, once (x"N"), stepped
Sine:	1μHz to 500MHz	Parameters Ratio:	16,000,000 to 1	Advance Source:	External, internal or software
Square, Pulse:	1μHz to 350MHz	Resolution:	1ns	MODULATION	
All Others:	1μHz to 125MHz	Pulse Width:	2ns to 1.6s		
SINE		Resolution:	5ns	Carrier Waveform:	Sine wave
Start Phase:	0-360°	Resolution:	5ns	Carrier Frequency:	1μHz to 350MHz
Phase Resolution:	0.01°	Accuracy:	<2% (typ.)	Source:	Internal
Harmonics Distortion @1Vp-p (Typ.):		Rise/Fall Time:		FM	
5MHz to 200MHz:	<-40dBc	Fast:	<1ns		
200MHz to 350MHz:	<-50dBc	Linear:	1ns to 1.6s	Modulating Shape:	Sine, square, triangle, ramp
Non-Harmonics Distortion @1Vp-p (Typ.):		Double Pulse Delay:	4ns to 1000s	Modulating Freq.:	100Hz to 35MHz
1MHz to 100MHz:	<-80dBc	Impedance:	50Ω	Deviation Range:	10mHz to 175MHz
100MHz to 250MHz:	<-75dBc	Amplitude Window:	100mVp-p to 4Vp-p ⁽¹⁾	FSK / FREQUENCY HOPPING	
250MHz to 350MHz:	<-70dBc	Low Level:	-2V to +1.95V ⁽¹⁾		
THD:	0.1% (DC to 100kHz)	High Level:	-1.95V to +2V ⁽¹⁾	FSK Baud Rate:	10mbps to 350Mbps
Flatness:	±0.5dB cross range	⁽¹⁾ Double into option impedance		Hop Table Size:	2 to 256
SSB Phase Noise (10kHz offset) typ.:		PULSE / PATTERN COMPOSER		Hop Type:	Fast or Linear
1MHz Carrier:	<-120dBc/Hz	Number of Levels:	1 to 1000	Dwell Time Mode:	Fixed or programmable per step
10MHz Carrier:	<-118dBc/Hz	Dwell Time:	500ps to 10s	Dwell Time:	2ns to 10s
100MHz Carrier:	<-115dBc/Hz	Transition type:	Fast or Linear	Resolution:	2ns
250MHz Carrier:	<-110dBc/Hz	Memory:	100k	SWEEP	
350MHz Carrier:	<-100dBc/Hz	Amp. Resolution:	4 points		
TRIANGLE / RAMP (SAW-TOOTH)		Time Resolution:	1 to 1k	Sweep Step:	Linear or log
Start Phase:	0-360°	Waveform Granularity:	500ps to 100ns (auto or user)	Sweep Direction:	Up or Down
Phase Resolution:	0.01°	PATTERN		Sweep Time:	1μs to 10ms
Timing Ranges:	1.0%-99.9% of period	Pattern Source:	PRBS or user-defined	CHIRP	
SQUARE		PRBS Type:	PRBS7, PRBS9, PRBS11, PRBS15, PRBS23, PRBS31, USER		
		Duty Cycle Range:	1.0% to 99.9%	Data Rate:	10Bit/s to 350MBit/s
Resolution:	0.1%	Number of Levels:	2, 3, 4, 5	Pulse Repetition:	
Rise/Fall Time:	<1ns	High/Low Levels:	±2.5V	Range:	200ns to 20s
Overshoot (typ.):	<5% (typ)	Resolution:	4 digits	Resolution:	3 digits
Jitter (rms):	<10ps	Loops:	1 to 1e6	Accuracy:	100ppm
GAUSSIAN		Preamble:	1 to 512e3	AM	
Time Constant:	10-200	Length:	1 to 512e3		
EXPONENTIAL PULSE		ARBITRARY WAVEFORMS		Envelope Waveform:	Sine, square, triangle, ramp
Type:	Rise or Decay, selectable	Sample Rate:	10MS/s to 2GS/s	Envelope Freq.:	100Hz to 1MHz
Time Constant:	-100 to 100	Vertical Resolution:	14 bits	Modulation Depth:	0.1% to 200%
REPETITIVE NOISE		Waveform Memory:	16Mpts	ASK / AMPLITUDE HOPPING	
Bandwidth:	125MHz	Min. Segment Size:	192 points		
DC		Resolution:	16 points	ASK Baud Rate:	10mbps to 350Mbps
Range:		No. of Segments:	1 to 1k	Hop Table Size:	2 to 256
WS8101/2:	-8V to 8V	Waveform Granularity:	1 point	Hop Type:	Fast or Linear
WS8104:	-5V to 5V			Dwell Time Mode:	Fixed or programmable per step
				Dwell Time:	2ns to 10s
				Resolution:	2ns
COMMON CHARACTERISTICS					
FREQUENCY					
				Resolution:	8 digits
				Accuracy/Stability:	Same as reference

WS8351A/WS8352A/WS8354A-DST

350MHz Single, Dual & Four Channel Arbitrary Function Generators

Specifications

ACCURACY REFERENCE CLOCK	
Internal:	1ppm/year aging rate
External (10MHz):	-5dBm to 5dBm, 50Ω
AMPLITUDE	
Range:	
Single-ended:	50mV to 4Vp-p into 50Ω ⁽¹⁾
Differential:	100mV to 8Vp-p into 50Ω ⁽¹⁾
Resolution:	4 digits
Accuracy (1kHz):	±(3% +5mV)
Rise/Fall Time:	< 1ns, typ.
Overshoot:	5%, typ.
OFFSET	
Range:	-1.5V to + 1.5V into 50Ω
Resolution:	4 digits
Accuracy:	±(5% +5mV)

OUTPUTS

MAIN OUTPUTS

Connectors:	Front panel SMA
Type:	Single-ended or differential
Impedance:	50Ω ±1%
Protection:	Short Circuit to Ground, 10s max

SYNC OUTPUT

Connector:	Front panel SMA
Source:	Channel 1 or channel 2
Type:	Single ended
Waveform Type:	
Pulse:	16 points width
WCOM:	Waveform complete
Impedance:	50Ω
Amplitude:	1V; doubles into high Z

Variable Position Control:

Range:	0 to segment length
Resolution:	16 points
Rise/Fall Time:	2ns, typ.

Variable Width Control:

Range:	16 points to segment length
Resolution:	16 points

MARKER OUTPUTS

Number of Markers:	4, Differentials
Connectors:	Rear panel SMB
Amplitude Voltage:	
Window:	0V to 1.25V, single-ended; 0V to 2.5V, differential
Low Level:	0V to 0.8V, single-ended; 0V to 1.6V, differential
Low Level:	0.5 V to 1.25V, single-ended; 0V to 2.5V, differential

Resolution:	10mV
Accuracy:	10% of setting
Width Control:	2 SCLK to segment length
Position Control:	
Range:	0 to segment length
Resolution:	2 points
Resolution:	4 digits
Initial Delay:	4ns±½ clock (Output to marker)
Variable Delay:	
Control:	0 to segment length
Range:	2 points
Resolution:	0 to segment length
Accuracy:	2 points
Skew Between Mrk:	10ps, typ.
Rise/Fall Time:	< 1ns, typ.

INPUTS

TRIGGER & EVENT INPUTS

Connector:	
Trigger In:	Front panel SMA
Event In:	Rear panel BNC
Frequency Range:	0 to 15MHz
Input Impedance:	10kΩ
Polarity:	Positive or negative, selectable
Damage Level:	±20V
Sensitivity:	100mV
Trigger Level Control:	
Range	-5V to 5V
Resolution	12 bit (2.5mV)
Accuracy	±(5% of setting + 2.5mV)
Sensitivity	0.2Vp-p
Min. Pulse Width:	10ns

EXTERNAL REFERENCE INPUT

Connector:	Rear panel SMB
Input Frequency:	10MHz / 100MHz
Impedance:	50Ω
Voltage Swing:	-5dBm to 5dBm
Damage Level:	10dBm

EXTERNAL SAMPLE CLOCK INPUT

Connector:	Rear panel SMA
Voltage Swing:	0dBm to 10dBm
Input Impedance:	50Ω
Input Frequency:	1GHz to 4GHz (Double the internal clock)
Clock Divider:	1/1, 1/2, 1/4, 1/256, separate for each channel
Damage Level:	15dBm

RUN MODES

Type:	Continuous, self armed, armed, triggered, normal, override, gated, burst
Continuous:	A selected output function shape is output continuously.
Self Armed:	No start commands are required to generate waveforms.
Armed:	The output dwells on a DC level and waits for an enable command and then the output waveform is output continuously; An abort command turns off the waveform.
Triggered:	A trigger signal activates a single-shot or counted burst of output waveforms and then the instrument waits for the next trigger signal.
Normal Mode:	The first trigger signal activates the output; consecutive triggers are ignored for the duration of the output waveform.
Override Mode:	The first trigger signal activates the output; consecutive triggers restart the output waveform regardless if the current waveform has been completed or not.
Gated:	A waveform is output when a gate signal is asserted. The waveform is repeated until the gate signal is de-asserted. Last period is always completed.
Burst:	Upon trigger, outputs a Dual or multiple pre-programmed number of waveform cycles from 1 through 1M.

WS8351A/WS8352A/WS8354A-DST

350MHz Single, Dual & Four Channel Arbitrary Function Generators

Specifications

TRIGGER CHARACTERISTICS	
EXTERNAL	
Source:	Channel 1, channel 2, or both
Slope:	Positive/Negative, selectable
Damage Level:	±20V
Input Frequency:	DC to 15MHz
Trigger Level Control:	
Range:	-5V to 5V
Resolution:	12 bit (2.5mV)
Accuracy:	±(5% of setting + 2.5mV)
Sensitivity:	0.2Vp-p
Min. Pulse Width:	10ns, min.
System Delay:	200 SCLK periods + 50ns
Trigger Jitter:	Separate for each channel
Range:	0 to 8M SCLK periods
Resolution:	4 points
Accuracy:	Same as SCLK accuracy
Smart Trigger:	Detects a unique pulse width
Conditioned Trigger:	< pulse width, > pulse width or <> pulse width
PW Range:	50ns to 2s
Resolution:	2ns
Accuracy:	±(5% of setting +20ns)
Trigger Jitter:	Ignores triggers for a hold-off
Hold-off Range:	100ns to 2s
Resolution:	2ns
Accuracy:	±(5% of setting +20ns)
Trigger Jitter:	2ns at max. SCLK (4 SCLK)
INTERNAL / TIMER	
Range:	200ns to 20s
Resolution:	20ns
Error:	3 SCLK + 20ns
MANUAL	
Source:	Soft trigger command from the front panel or remote

INTER-CHANNEL SKEW CONTROL	
Initial skew:	200ps
COURSE TUNING	
Control:	
Range	0 to waveform-length points
Resolution	4 points
Accuracy:	Same as SCLK accuracy
FINE TUNING	
Control:	
Range	-3ns to +3ns
Resolution	10ps
Accuracy:	(10% of setting + 20ps)

GENERAL	
Voltage:	100 to 240VAC, 50-60Hz
Power Consumption:	150W max.
Display Type:	TFT, Color LCD
Size:	4"
Resolution:	320 x 240 pixels
Interfaces:	
USB 2.0:	
Host:	1 x Front, USB type A
Device:	1 x Rear, USB type B
LAN:	1 x Rear, 1000/100 BASE-T
GPIB:	1 x Rear, IEEE-488.2
Dimensions (WxHxD):	
With Feet:	315 x 102 x 395 mm
Without Feet:	315 x 88 x 395 mm
Weight:	
Without Package:	4.5 Kg
Shipping Weight:	6 Kg
Temperature:	
Operating:	0°C to +40°C
Storage:	-40°C to +70°C
Warm up time:	30 minutes
Humidity:	85% , non-condensing
Safety:	CE Marked, IEC61010-1-1:2008
EMC:	IEC 61326-1:2006
Calibration:	2 years
Warranty:	1 year

ORDERING INFORMATION	
MODEL	DESCRIPTION
WS8351A-DST	350MHz Single Channel Arbitrary Function Generator
WS8352A-DST	350MHz Dual Channel Arbitrary Function Generator
WS8354A-DST	350MHz Four Channel Arbitrary Function Generator
ACCESSORIES	
S-Rack Mount:	19" Single Rack Mount Kit
Case Kit:	Professional Carrying Bag

Disclaimer. The contents of this document are provided by Tabor Electronics, 'as is'. Tabor makes no representations nor warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to the specification at any time without notice.