
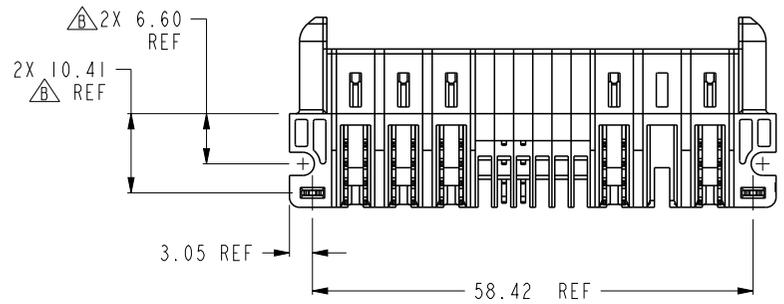
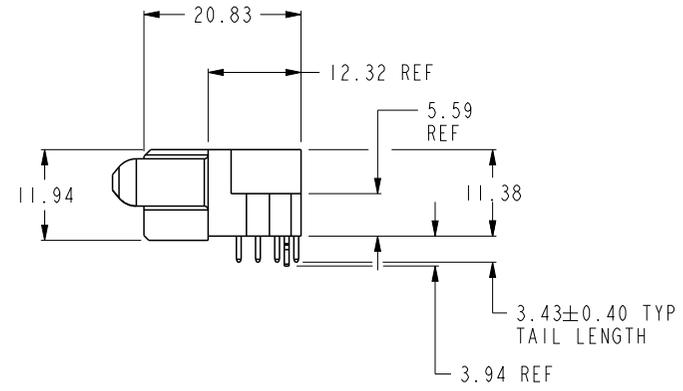
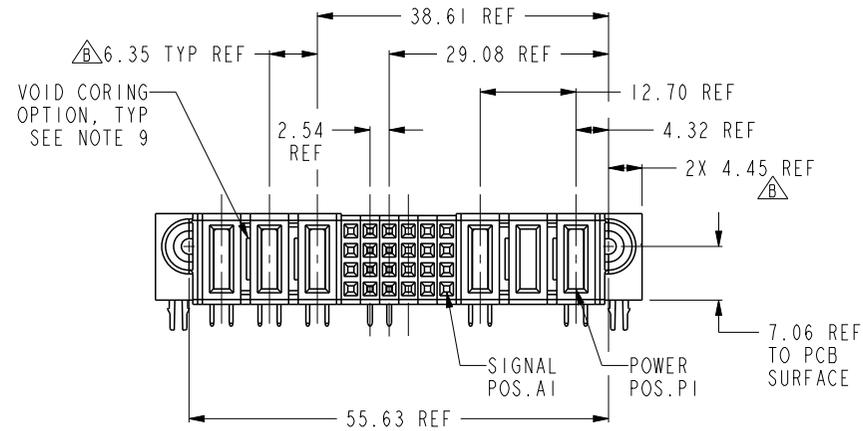


PART NUMBER 10106126-6006001LF

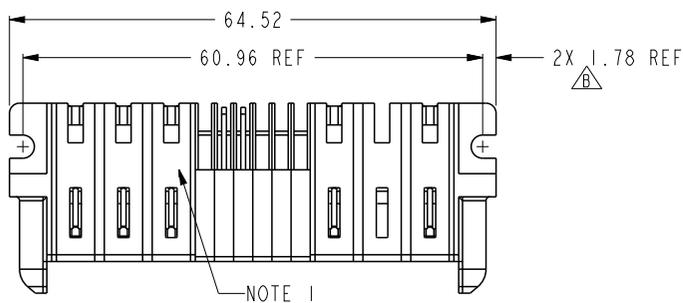

spec ref	*		
tolerance std	ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	
surface	linear	0.X	±0.50
		0.XX	±0.25
		0.XXX	±0.10
	angular	0°	±2°

dr	Peng-Bing Fu	2011/04/06
eng	Peng-Bing Fu	2012/11/14
chr	Tian-Xu Huang	2012/11/15
appr	Pei-Ming Zheng	2012/11/15

projection		size	A4	scale	1.000
product family	-	ecn no	ELX-DG-013144-1		
		rel level	Released		

	title	3HP + 24S + 3HP		dwg no	10106126-6006001	rev	B
www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 3			


Print File - REV C - 2009-06-09




Copyright FCI.

PRODUCT NUMBER

10106126-6006001LF

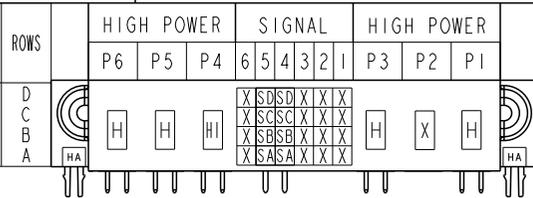

CODE	DESCRIPTION
H	STD HIGH POWER CONTACT
HI	MFBL HIGH POWER CONTACT
SA	STD SIGNAL CONTACT, ROW A
SB	STD SIGNAL CONTACT, ROW B
SC	STD SIGNAL CONTACT, ROW C
SD	STD SIGNAL CONTACT, ROW D
X	OMITTED
HA	METAL HOLD DOWN

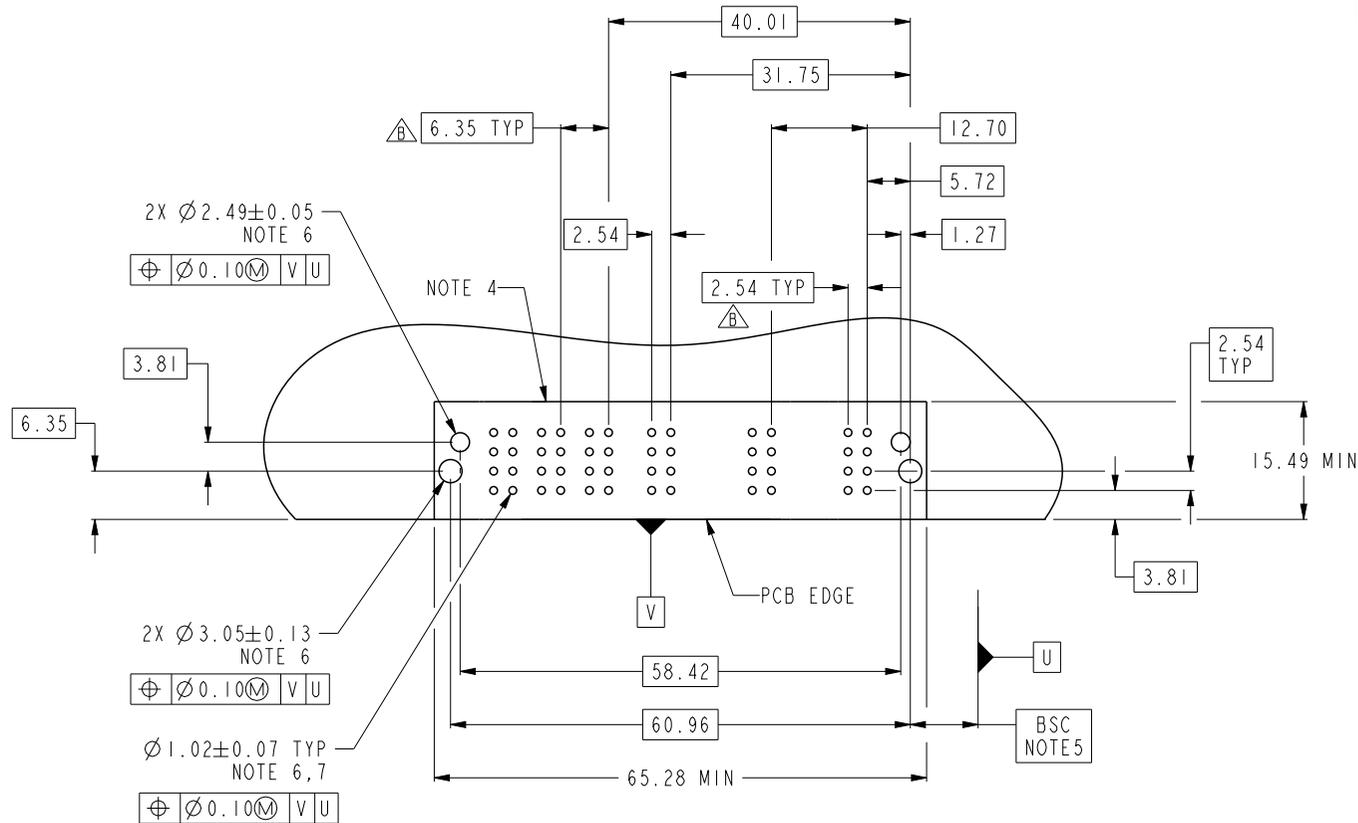


dr	Peng-Bing Fu	2011/04/06	projection 	MM ←→	size	A4	scale	1.000	
eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013144-1			
chr	Tian-Xu Huang	2012/11/15			rel level	Released			
appr	Pei-Ming Zheng	2012/11/15	product family	-		rev	B		
		title			3HP + 24S + 3HP		dwg no		10106126-6006001
www.fci.com		cat. no.			-		Product - Customer Drw		sheet 2 of 3
					PDS: Rev :B		STATUS:Released		Printed: Nov 16, 2012

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN.
PART LENGTH UNDER 30MM SHOW DATE CODE ONLY.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.
- 10) A  SYMBOL WILL BE NEXT TO ANY DIMENSION,VIEW,OR NOTE WHICH
HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



Copyright FCI.

dr	Peng-Bing Fu	2011/04/06	projection 	MM 	size	A4	scale	1.000	
eng	Peng-Bing Fu	2012/11/14			ecn no	ELX-DG-013144-1			
chr	Tian-Xu Huang	2012/11/15			product family	-	rel level	Released	
appr	Pei-Ming Zheng	2012/11/15					title 3HP + 24S + 3HP RA STB RECEPTACLE	dwg no 10106126-6006001	rev B
www.fci.com		cat. no.	-	Product - Customer Drw			sheet 3 of 3		