



P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	LC20-0090-20 / ECO-20-015479	30OCT2020	DM	BJ

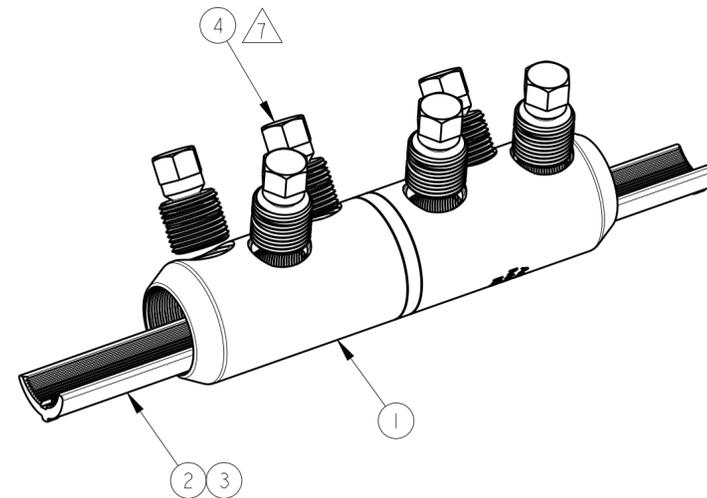

1. ACCOMMODATES:  
500 KCMIL TO 750 KCMIL ALUMINUM  
OR COPPER CONDUCTORS.

2. MARKING:

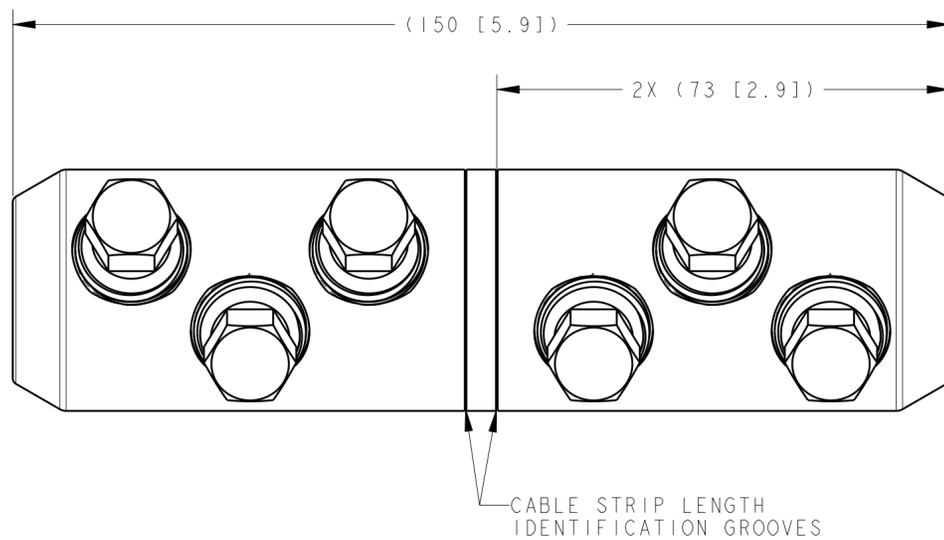

ASBS-500-750  
MADE IN [COUNTRY OF ORIGIN]  
[DATE CODE]



3. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

4. INSERT SHALL BE REMOVED FOR  
CONDUCTOR SIZES GREATER THAN  
600 KCMIL COMPACT STRANDED  
(.813 [20.6] CONDUCTOR DIAMETER)


5. CONNECTOR CONTAINS FACTORY APPLIED  
ANTI-OXIDE INHIBITOR.

6. FINISH:  
ELECTRO-TIN PLATED.

7. INSTALL BOLTS WITH 13 mm [1/2 inch]  
HEX SOCKET.

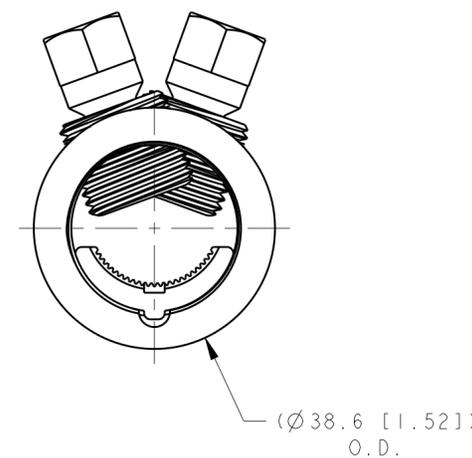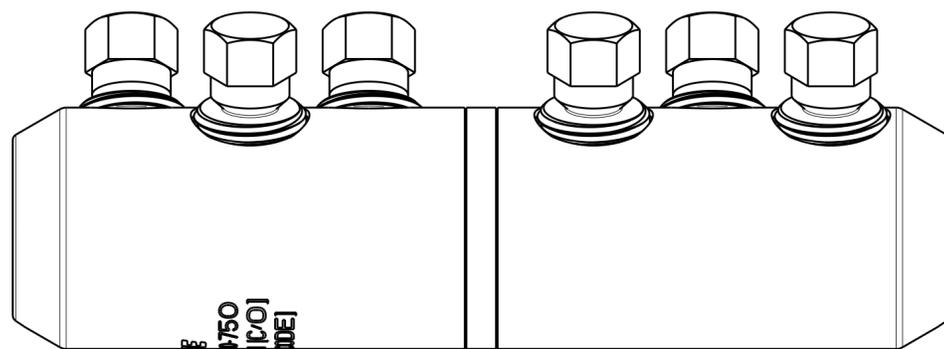

ASBS-500-750	1099735-1
CATALOG NO	PART NO.

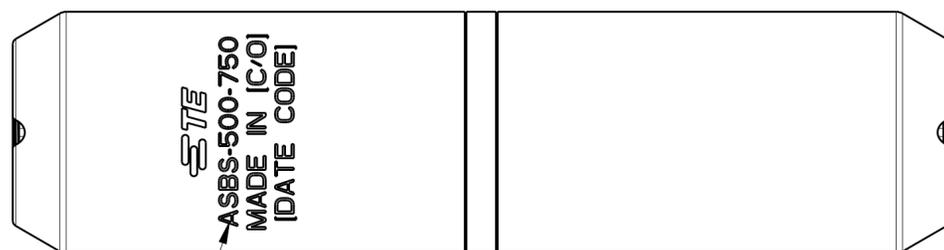

QTY	DESCRIPTION	ITEM NO
1	INSTALLATION INSTRUCTION SHEET, 408-8990	6
1	ABRASIVE TAPE, 1X24-120 G	5
6	BOLT, MULTI-SHEAR, M18 SIZE, ALUMINUM	4
A/R	INHIBITOR	3
2	INSERT, SHEARBOLT CONNECTOR, ALUM ALLOY, TIN PLATED	2
1	SHEARBOLT CONNECTOR BODY, ALUMALLOY, TIN PLATED	1
- 1		
PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ROBITALLE 10SEP2004	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK A. BULZA 14JAN2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. JOHNSON 18JAN2005	NAME SHEARBOLT CONNECTOR, ALUMINUM, SOLID OIL STOP, 500 CPT-750 STD KCMIL	
0 PLC ±		PRODUCT SPEC	SIZE   CAGE CODE   DRAWING NO	
1 PLC ±		APPLICATION SPEC	RESTRICTED TO	
2 PLC ±		WEIGHT	A200779 C-1099735	
3 PLC ±		CUSTOMER DRAWING	SCALE NTS SHEET OF REV H	
4 PLC ±				
ANGLES ±				
FINISH TIN PLATED				