


LTR	DESCRIPTION	DATE	BY
-	Released	9/13/02	JCL

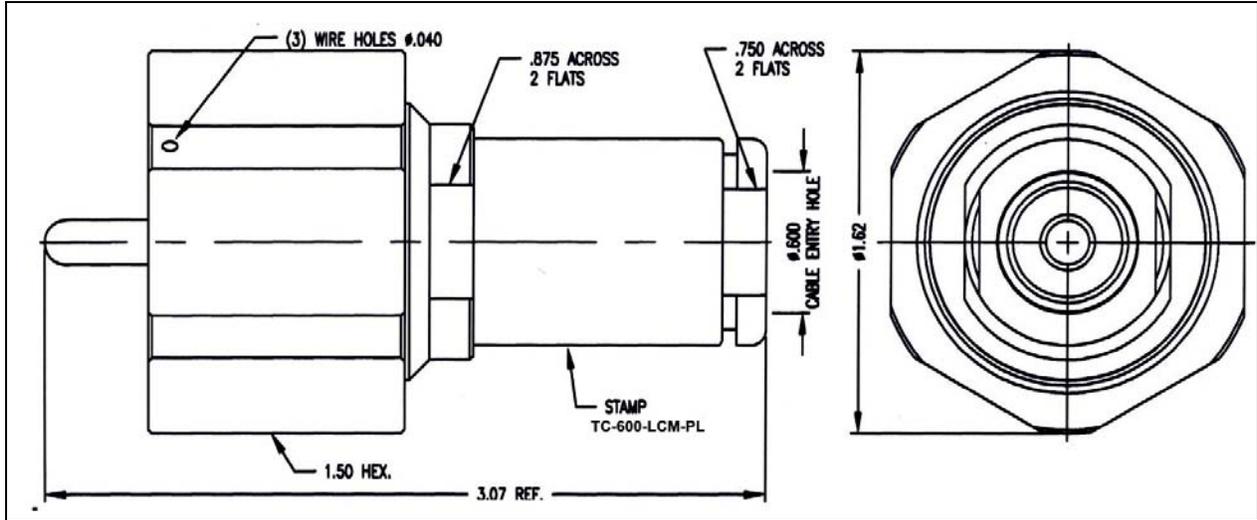

**I. MATERIALS & FINISHES**

- center contact: Gold Plated Brass
- outer contact: Nickel Plated Phosphor Bronze
- body: Nickel Plated Brass
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- attachment: braid clamp

**II. ELECTRICAL PROPERTIES**

- impedance: 50 ohms
- working voltage: 5000 vrms (max)
- vswr: 1.25:1 (max) up to 1 GHz
- insertion loss: 0.10 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	9/13/02

**TIMES MICROWAVE SYSTEMS**  
 Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

**TC-600-LCM-PL**  
 Type-LC male plug  
 for LMR-600-LLPL Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1221
--------	-----------------	------------------------

Scale: NA	Rev. (-)	Sheet: 1 of 1
-----------	----------	---------------