
ITEM NO.	PART NUMBER	DESCRIPTION		COMPONENT NOTES
1	50-00987	Connector, 4 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67, shielded	1	
2	30-01578	Wire, 4C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 6 mm, shielded, VW-1, PVC, 80A, black	1	
3	24-00361	Overmold, M12 plug and jack, 90°	1	PVC, black
4	Heat Shrink	Heat shrink, black	1	covers drain
5	Heat Shrink	Heat shrink, black	1	covers end of jacket

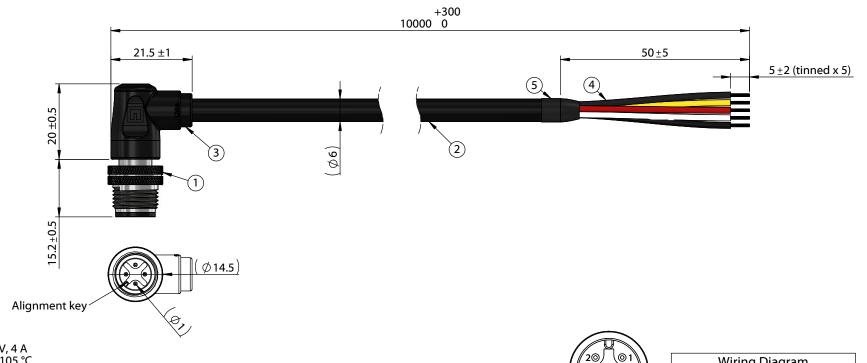

Notes:

Cable rated for 250 V, 4 A
Temperature: -40 ~ 105 °C
Oil resistant up to 60 °C
Water resistant up to 75 °C
UV resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

20 01	Wirin
30 04	50-00987
	1
Front View	2
Not to Scale	3

Willing Diagram					
50-00987	wire color				
1	red				
2	yellow				
3	black				
4	white				
Shell	shield/drain				

Revision:	Date:	Description:	Prepared:	Notes:					
Α	12/29/2021	Initial release		RoHS compliant			TFNSII ITY		
			Verified: Dimensions are in	Function test: no open, no sho intermittent	rt circuit, no	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			77.670.7118
			millimeters. Tolerances: X: ± 0.5 mm	Description: Cable, 10000 mm, 1.0 mm 4C 90° 50-00987 M12			Size: Part number: A 10-04734		
			X.X: ± 0.3 mm X.XX: ± 0.05 mm	plug to 5 mm tinned, 22 AWG, 30-01578 wire, shielded		Scale	: 1:1		Sheet 1 of 1
	•	5	4	3	2	•		•	1