






RIGHT ANGLE PLUG CRIMP TYPE CABLE 10.3/50S

PAGE 1/2 ISSUE 08-06-15B SERIES N PART NUMBER R161184080

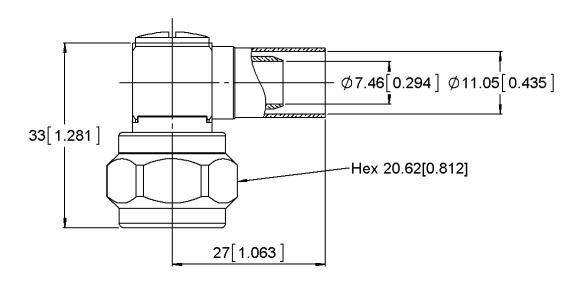





All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)	
Body	BRASS.	BBR.	
Center contact	BRASS.	GOLD OVER NICKEL	
Outer contact	BRASS.	BBR.	
Insulator	PTFE		
Gasket	SILICONE RUBBER		
Others parts	BRASS.	BBR.	
-	-	-	
-	-	-	



# **Technical Data Sheet**

RIGHT ANGLE PLUG CRIMP TYPE CABLE 10.3/50S

PAGE <b>2/2</b>	ISSUE <b>08-06-15B</b>	SERIES N	PART NUMBER R161184080
-----------------	------------------------	----------	------------------------

#### **PACKAGING**

50	Contact us	Contact us
Standard	Unit	Other

## **ELECTRICAL CHARACTERISTICS**

Impedance		50	Ω
Frequency		0-6	GHz
VSWR	1.6max +	0.0000	x F(GHz) Maxi
Insertion loss		0.25	√F(GHz) dB Maxi
RF leakage	- (	101	- F(GHz)) dB Maxi
Voltage rating		1400	Veff Maxi
Dielectric withstanding vo	ltage	2500	Veff mini
Insulation resistance		5000	$M\Omega$ mini

## **MECHANICAL CHARACTERISTICS**

Center contact retention Axial force - Mating End

27 N mini Axial force - Opposite end 27 N mini N.cm mini NA Torque

Recommended torque

130 Mating N.cm Panel nut NA N.cm Clamp nut N.cm NA A/F clamp nut 0.0000 mm

Mating life 500 Cycles mini 51.7400 g

Weight

## **ENVIRONMENTAL**

Operating temperature -55/+155 °C Hermetic seal NA Atm.cm3/s Panel leakage NA

## **SPECIFICATION**

## **CABLE ASSEMBLY**

Stripping	а	b	С	d	е	f
mm	5	8	21	0	16	0

Assembly instruction: Crimp 07

Recommended cable(s)

## AEP-400FR **LMR 400**

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

## Cable retention

- pull off 400 N mini - torque NA N.cm

## **TOOLING**

Part Number	Description	Hexagon
R282231000	CRIMPING TOOL	0.415
R282293000	CRIMPING TOOL M22520/5-01	
R282235116	CRIMPING DIES	

## **OTHER CHARACTERISTICS**