

ENERGIZER 397

ZEROMERCURY

SILVER OXIDE




General Information

Chemical System: Silver Oxide (Zn/Ag₂O)
Designation: ANSI-1164SO/1163SO, IEC-SR59
Nominal Voltage: 1.55 Volts
Typical Capacity: 34 mAh* (to 1.2 volts)
Capacity Test: 33K ohm continuous drain at 21°C
Typical Weight: 0.5 grams (0.018 oz.)
Typical Volume: 0.13 cubic centimeters (0.008 cubic inch)
Impedance (40 Hz): 15 to 30 ohms


* Varies according to the applied load, temperature, and cutoff voltage.

Industry Standard Dimensions

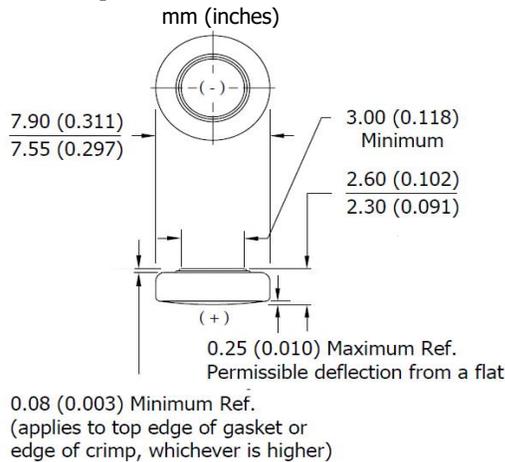

DESIGNED FOR USE ON CONTINUOUS LOW DRAIN


Cross Section

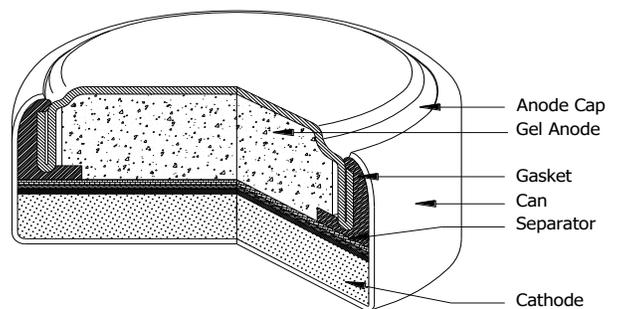

Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

Schedule: Continuous
Typical Drain @1.56V:
 0.047 milliamperes
Load: 33K ohm

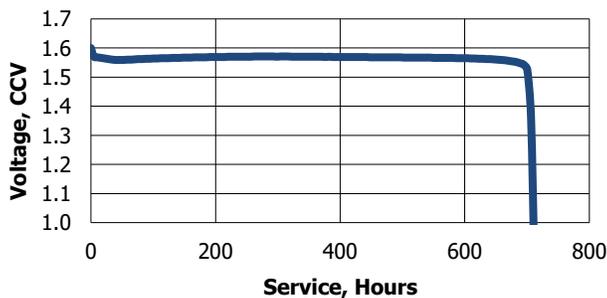


Schedule	Typical Drains at 1.49V (milliamperes)	Load (ohm)	Cutoff (hours)
Continuous	0.047	33K	718


Temperature Characteristics

Typical Performance at Low Discharge Rates

Service Effects

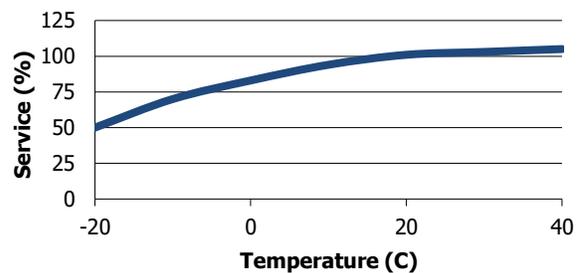

Storage Effects

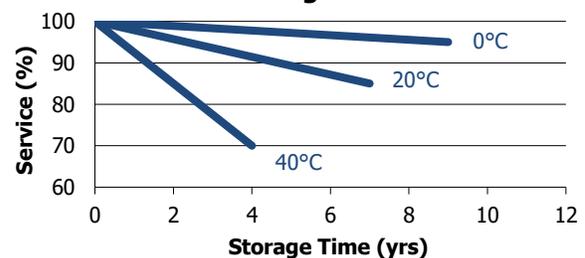

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.