

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Cable feed-through plates, no. of conductors: 25, length: 222 mm, width: 92 mm, height: 14 mm, external cable diameter:  $4x 5 \text{ mm} \dots 7 \text{ mm}$ , color: black

#### Your advantages

☑ Oil-resistant according to UL 157



### **Key Commercial Data**

Packing unit	1 pc
GTIN	4 055626 301846
GTIN	4055626301846

#### Technical data

#### **Dimensions**

Length	222 mm
Width	92 mm
Height	14 mm
Drill hole distance, horizontal	62 mm
Drill hole distance, vertical	193 mm
External cable diameter	4x 5 mm 7 mm
	4x 8 mm 12 mm
	12x 10 mm 14 mm
	4x 14 mm 20 mm
	1x 20 mm 26 mm

### Ambient conditions

Degree of protection	IP65 (Minimum sheet thickness >= 2.5 mm)
Ambient temperature (operation)	-40 °C 100 °C

#### General



### Technical data

### General


No. of conductors	25
Material	TPE-SEBS
	galvanized sheet steel ()
Flammability rating according to UL 94	V0
Color	black
Torque	1.5 Nm 2 Nm (Mounting screws)
Note	incl. mounting screws
	2 mm thick coated, galvanized sheet steel
Installation instructions	M8 mounting screw, torque: 1.5 - 2.0 Nm, SW5 Allen key
	The mounting screws included should be used for assembly.  Assembly steps:  1) Fix Multigates with the mounting screws provided (observe torque)  2) Make a hole in the membrane (with a screwdriver) or cut off the tip of the cone  3) Guide the cable through the opening (from the outside). Withdraw the
Standards and Regulations	cable approximately 20 mm (to improve strain relief).
-	V0
Flammability rating according to UL 94	٧٥
Environmental Product Compliance	


Environmentally friendly use period: unlimited = EFUP-e
No hazardous substances above threshold values

## Drawings

China RoHS






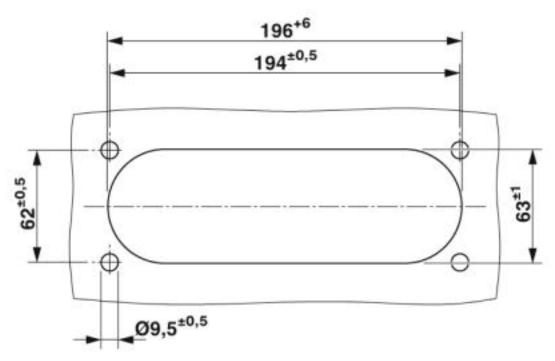

Wall cutout drawing



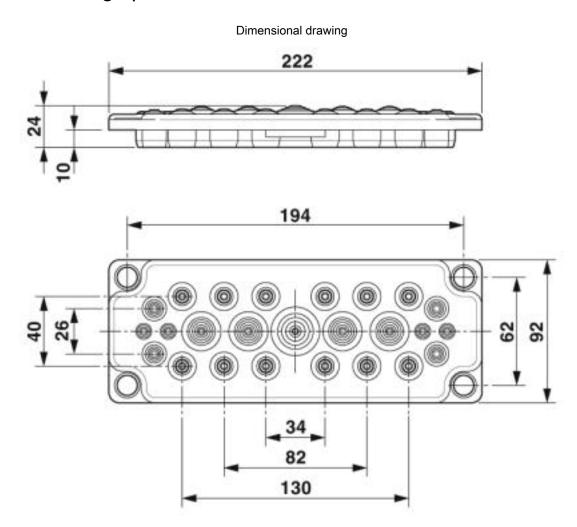

Dimensional drawing

Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8

32825 Blomberg

Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

09/23/2019 Page 4 / 4