## Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

 $\begin{aligned} &\text{Max-Eyth-Straße 1} \cdot 74638 \text{ Waldenburg} \cdot \text{Germany} \\ &\text{Tel.} + 49 (0) 79 42 945 - 0 \cdot \text{Fax} + 49 (0) 79 42 945 - 400 \\ &\text{eiSos@we-online.de} \cdot \text{www.we-online.de} \end{aligned}$ 



Product / F	Process Change Notificati	on (PCN)		
PCN #:	PCN_IndHCF_20200302	Change Category:		
Affected Series:	WE-HCF-2920; 74437429203xxx; 74437529203xxx	<ul> <li>□ Equipment / Location</li> <li>□ General Data</li> <li>□ Material</li> <li>□ Process</li> </ul>		
PCN Date:	December 02, 2019	☐ Product Design		
Effective Date:	March 02, 2020	<ul><li>☑ Shipping / Packaging</li><li>☐ Supplier</li><li>☐ Software</li></ul>		
Contact:	Product Management	Data Sheet Change:		
Phone:	+49 (0) 7942 - 945 5001	⊠ Yes □ No		
Fax:	+49 (0) 7942 - 945 5179	Attachment:		
E-Mail:	pcn.eisos@we-online.com	□ Yes ⊠ No		
DESCRIPTION AND PURPOSE OF CHANGE:				
To improve the handling and transportation safety, Würth Elektronik will change the packaging method of HCF 2920 series.				

## DETAIL OF CHANGE:


	Unit	New Packaging	Old Packaging
Carton Packaging Quantity (CPQ)		160	270
Standard Packaging Quantity (SPQ)		20	30
Number of plastic trays	pcs	8	9
Plastic tray dimensions	mm	245 x 195 x 23	245 x 195 x 22
Number of inner carton boxes	pcs	8	1
Inner carton dimension	mm	265 x 205 x 30	260 x 210 x 235
Outer carton box dimensions		275 x 232 x 255	275 x 232 x 255
Foam protection		No	Yes

All products with date code 2019-12-02 or later, will be affected by this change. There will be no change in form, fit, function, quality or reliability of the product.

## Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions

$$\label{eq:max-ey} \begin{split} \text{Max-Eyth-Straße 1} & \cdot \text{74638 Waldenburg} \cdot \text{Germany} \\ \text{Tel.} & +49 (0) \, 79 \, 42 \, 945 - 0 \cdot \text{Fax} \\ & +49 (0) \, 79 \, 42 \, 945 - 400 \\ \text{eiSos@we-online.de} \cdot \text{www.we-online.de} \end{split}$$



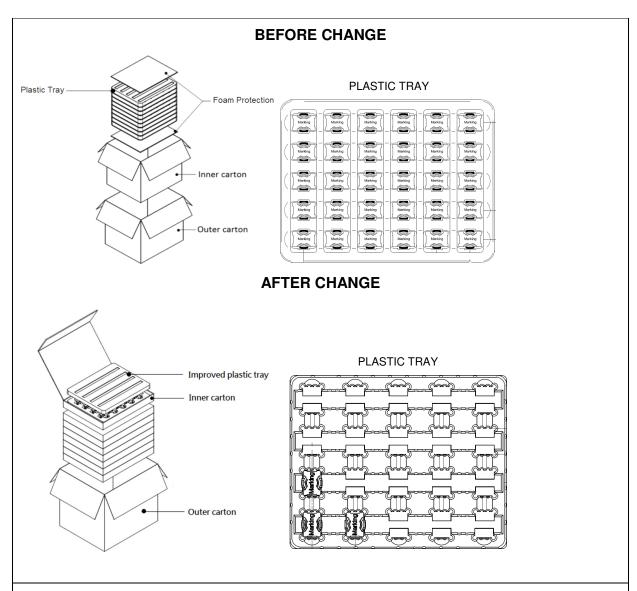

## **RELIABILITY / QUALIFICATION SUMMARY:**

Testing standard: DIN EN 222480

Product approval is according to the specification and is internally released by the Product Management Department.