


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X5R 0.1 uF 6.3V (0402X104K6R3CT)

1. Dimension

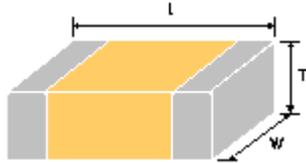

| Size Inch (mm) | L (mm) | W (mm) | T (mm) |
|----------------|-----------|-----------|-----------|
| 0402 (1005) | 1.00±0.05 | 0.50±0.05 | 0.50±0.05 |


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 6.3V, 120sec)

| Item | Spec |
|------------|-----------|
| Cap [uF] | 0.1(±10%) |
| DF | ≤ 10% |
| IR [G-ohm] | 1 |


3. Impedance/ESR-Frequency

(Equipment: 4294A)

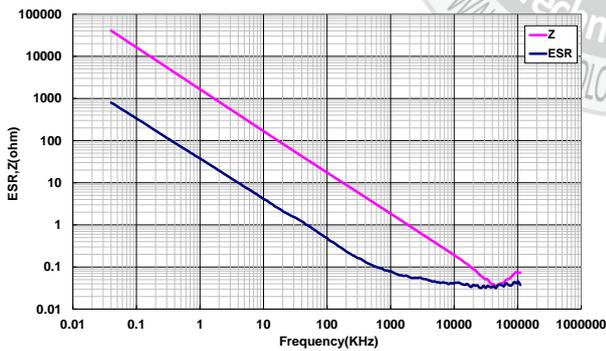

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

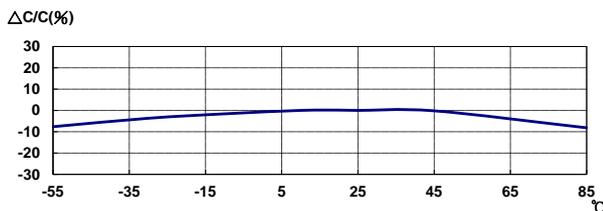

5. Temperature Rise – Ripple Current


(Equipment: 11810)

Over the measure limit.

6. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

3.15V : -3.00% ; 6.3V : -17.57%

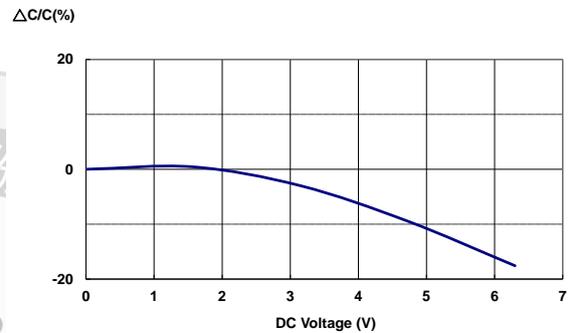

7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

