
DESCRIPTION: 979 SERIES D-SUB BACKSHELL - DIE CAST

ALL TOLERANCES = ±0.004 [±0.10] UNLESS OTHERWISE INDICATED

## 2.277 [57.84] 0.937 [23.80] 0.622 [15.80] Max. CABLE Ø 1.772 [45.00] 2.508 [63.70]2.744 [69.70]

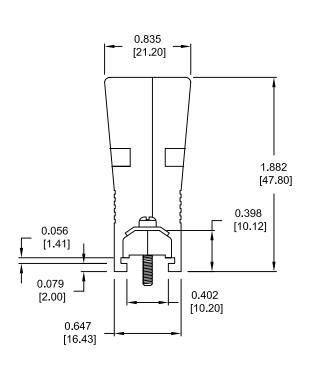

### **BACK SHELL KIT INCLUDES:**


- 2 BACK SHELL HALVES
- 2 4-40 MATING SCREWS
- 2 SADDLE WASHERS
- 2 HOUSING SCREWS
- 2 HOUSING NUTS
- 1 GROMMET TREE VARIOUS SIZES (NON-CONDUCTIVE GROMMETS)

MATERIAL: DIE-CAST ZINC ALLOY

PLATING: NICKEL

OPERATING

TEMPERATURE: -45°C TO + 120°C

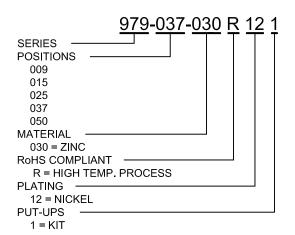

## DO NOT SCALE FROM DRAWING

体

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NOTCOMP AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: DATE: 04-20-10

 SCALE:
 SHEET
 OF
 REV

 NTS
 1
 2
 3


 DWG NO.
 3
 3
 3

979-037-030R121

ROHS COMPLIANT

# DESCRIPTION: 979 SERIES D-SUB BACKSHELL - HARDWARE 0.219 [5.56] 0.601 [15.27] 0.209 [5.32] 0.209 HOUSING SCREW


**MATING SCREW** 

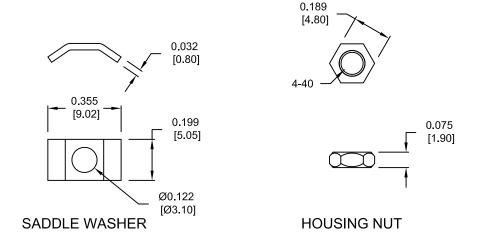


**ALL HARDWARE:** 

MATERIAL = STEEL PLATING = NICKEL

TOLERANCE =  $\pm 0.002 [\pm 0.05]$ 

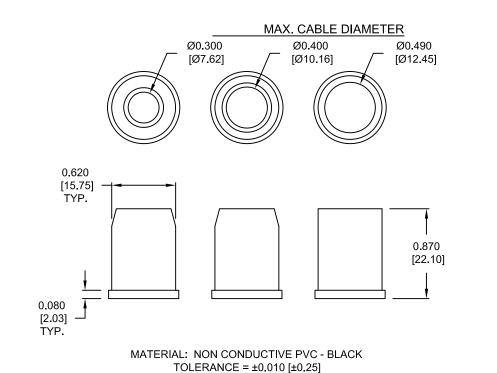

## DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: DATE: 04-20-10

NorComp

SCALE: NTS SHEET OF REV 3

DWG NO. 979-037-030R121

# RoHS COMPLIANT