

DO NOT SCALE FROM THIS PRINT

NOTES: 1. HIDDEN LINES ARE USED TO SHOW POLARIZATION

WHEN USING -N OPTION.

© REPRESENTS A CRITICAL DIMENSION.

3. FFSD CABLE ASSEMBLIES ARE LEAD FREE.

4. ALL ASSEMBLIES TO BE 100% ELECTRICALLY TESTED FOR SHORTS AND OPENS.

5. ALL ASSEMBLIES TO BE 100% HI-POT TESTED AT 630V. C

6. STRAIN RELIEF TO WITHSTAND 5LB[22N] STRAIGHT PULL.

7. NOTE DELETED.

8. WHEN CUTTING CABLE TO LENGTH, CONDUCTORS SHOULD NOT EXTEND PAST THE CABLE INSULATION, EXTENDING LESS THAN 25% OF CABLE THICKNESS ON CONSECUTIVE AND LESS THAN 50% OF CABLE THICKNESS ON NON-CONSECUTIVE STRANDS IS CONSIDERED A PROCESS INDICATOR.

 $XX.XX[XX.X \times 25.4]\pm1\%$ 

(SEE NOTE 8 & 11)

9. REFERENCE FFSD-XX-XX-X-N-XXX FOR CONNECTOR ASSEMBLY

DIMENSIONS AND ITS REQUIREMENTS.

10. COLORED WIRE MUST MATCH FIRST POSITION INDICATOR ON THE FIRST CONNECTOR FOR ALL OPTIONS WITH THE EXCEPTION OF -RW.

11. FOR LENGTHS LESS THAN 12.5", TOLERANCE SHALL BE +/-.125, ALL OTHER LENGTHS SHALL BE +/-1%.

No OF POSITIONS -02 THRU -25 (PER ROW) **END ASSEMBLY** -S: SINGLE END -D: DOUBLE END **ASSEMBLY LENGTH** 

FFSD-XX-X-XX.XX-01-X-X-XXX

-D"XX", -R, -M & -O OPTION: 2.00[50.8] MINIMUM ALL OTHER OPTION: 1.00[25.4] MINIMUM

LEAD STYLE

# **PLATING OPTIONS**

- LEAVE BLANK FOR STANDARD, USE C-67-L

-S: USE C-67-S

-F: USE C-67-F

**OPTION** 

-R: REVERSED

-RW: REVERSE WIRING

(NOT AVAILABLE WITH -O, -M, (SOLD AS ASSEMBLIES ONLY)

-R, OR -DXX)

-SR: STRAIN RELIEF

-M: MIDDLE REVERSE

-O: OUTSIDE REVERSE

(NOT AVAILABLE WITH -RN1 OR -RN2)

(MINIMUM 2.00[50.8], 1.00[25.4] INCREMENTS)

(NOT AVAILABLE WITH -RW OR -RN2)

(NOT AVAILABLE WITH -RW OR -RN1)

(MINIMUM 2.00[50.8], 1.00[25.4] INCREMENTS)

(MINIMUM 2.00[50.8], 1.00[25.4] INCREMENTS)

 $XX.XX[XX.X \times 25.4]\pm1\%$ (SEE NOTE 8 & 11)

-D"XX": DAISY CHAIN (MINIMUM 2.00[50.8],

1.00[25.4] INCREMENTS)

(NOT AVAILABLE WITH -M OR -O)

-RN1: REVERSE POLARIZATION NOTCH


-RN2: REVERSE POLARIZATION NOTCH

(NOT AVAILABLE WITH -R OR -O)

(NOT AVAILABLE WITH -R OR -M)

## STANDARD POLARIZATION NOTCH

-N: POLARIZATION NOTCH (NOT AVAILABLE IN -02 THRU -04) (LEAVE BLANK FOR -02, -03, -04)

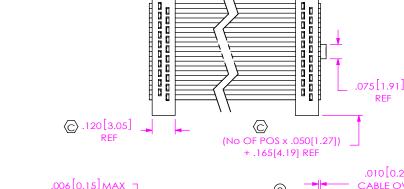


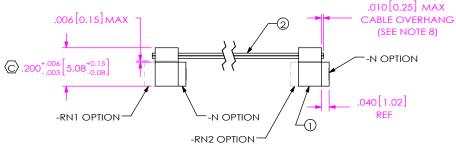


FIG 1 (FFSD-10-D-XX.XX-01-X-N SHOWN)



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS ANGLES .XX: ±.01 [.3] .XXX: ±.005 [.13] .XXXX: ±.0020 [.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN. MANUFACTURING. REPRODUCTION. USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

INSULATORS: PBT UL94V-0, COLOR: BLACK CONTACT: BeCu WIRE: 30 AWG, 7/38, TINNED, STRANDED WITH GRAY PVC INSULATOR PLATING: .000010 GOLD OVER .000050 NICKEL

REMAINDER: .000200 REF TIN OVER .000050 NICKEL



PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail\_info@SAMTEC.com code 55322

FIG 2

(FFSD-10-S-XX.XX-01-X-N SHOWN)

(SAME AS FIG 1, DIFFERENT AS SHOWN)

.050 x .050 DOUBLE ROW FEMALE IDC ASSEMBLY

FFSD-XX-X-XX.XX-01-X-X-XXX

BY: T NEWTON 02/15/2008 SHEET 1 OF 4





TABLE 1	
ITEM #	PART
1	FFSD-XX-01-X-N-XX
2	CB-XX-30-7/38-025-GR
3	FFSD-XX-01-X-N-SR1
4	FFSR-XX-01
5	FFSD-XX-01-X-N-SR2
6	FFSR-XX-02


F:\DWG\MISC\MKTG\FFSD-XX-X-XX.XX-01-X-X-XXX-MKT.SLDDRW



<u>FIG 3</u> (FFSD-10-D-XX.XX-01-X-N-RN1 SHOWN) (SAME AS FIG 1, DIFFERENT AS SHOWN)

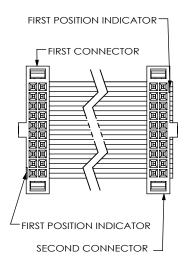



(FFSD-10-D-XX.XX-01-X-N-RN2 SHOWN) (SAME AS FIG 1, DIFFERENT AS SHOWN)

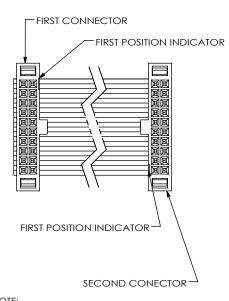

-RN1 = REVERSE NOTCH ON 1ST CONNECTOR ONLY ( NOT AVAILABLE WITH -R OPTION) -RN2 = REVERSE NOTCH ON 2ND CONNECTOR ONLY (NOT AVAILABLE WITH -R OPTION)

(REVERSE NOTCH NOT AVAILABLE WITH -RW OR ANY DAISY CHAIN OPTIONS)

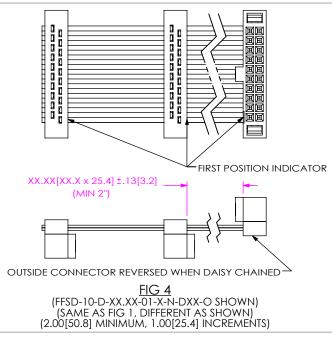





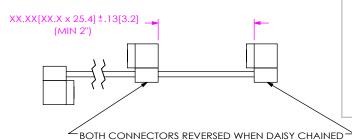


FIG 6 (FFSD-10-D-XX.XX-01-X-N-DXX-R SHOWN) (SAME AS FIG 1, DIFFERENT AS SHOWN) (NOT AVAILABLE WITH -RN1 OR -RN2 OPTION) (2.00[50.8] MINIMUM, 1.00[25.4] INCREMENTS)

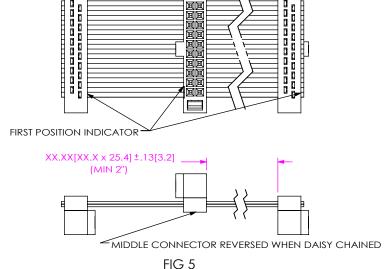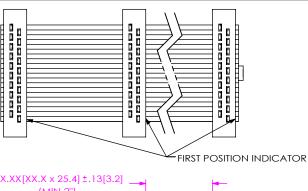

回回

<u>FIG 5</u> (FFSD-10-D-XX.XX-01-X-N-DXX-M SHOWN) (SAME AS FIG 1, DIFFERENT AS SHOWN) (2.00[50.8] MINIMUM, 1.00[25.4] INCREMENTS)






FIG 7 (FFSD-10-D-XX.XX-01-X-N-DXX SHOWN) (SAME AS FIG 1, DIFFERENT AS SHOWN) (2.00[50.8] MINIMUM, 1.00[25.4] INCREMENTS)

### PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN. MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK FAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

.050 x .050 DOUBLE ROW FEMALE IDC ASSEMBLY

FFSD-XX-X-XX.XX-01-X-X-XXX

BY: T NEWTON 02/15/2008 SHEET 2 OF 4

F:\DWG\MISC\MKTG\FFSD-XX-X-XX,XX-01-X-X-XXX-MKT,SLDDRW

