



100V PNP HIGH VOLTAGE TRANSISTOR IN TO252 (DPAK)

Description

This Bipolar Junction Transistor (BJT) is designed to meet the stringent requirements of Automotive Applications.

Features


- $BV_{CFO} > -100V$
- I_C = -3A High Continuous Collector Current
- I_{CM} = -5A Peak Pulse Current
- Ideal for Power Switching or Amplification Applications
- Complementary NPN Type: MJD31CUQ
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)

Mechanical Data

- Case: TO252 (DPAK)
- Case Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202. Method 208 @3
- Weight: 0.34 grams (Approximate)







Pin Out Configuration Top View

Ordering Information (Notes 4 & 5)


Part number	Compliance	Marking	Reel size (inches)	Tape width (mm)	Quantity per reel
MJD32CUQ-13	Automotive	MJD32CU	13	16	2,500

Device Schematic

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

- 2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. Automotive products are AEC-Q101 qualified and are PPAP capable. Refer to http://www.diodes.com/product_compliance_definitions.html.
- 5. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

Marking Information



MJD32CU = Product Type Marking Code The Manufacturers' Code Marking YYWW = Date Code Marking YY = Last Two Digits of Year (ex: 17 = 2017) WW = Week Code (01 to 53)



Absolute Maximum Ratings (@TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-120	V
Collector-Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-7	V
Continuous Collector Current	Ic	-3	А
Peak Pulse Collector Current	I _{CM}	-5	А
Continuous Base Current	lΒ	-1	A
Power Dissipation	P_{D}	15	W

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit		
	(Note 6)		3.9		
Power Dissipation	(Note 7)	(Note 7) P _D	2.1	W	
	(Note 8)		1.6		
	(Note 6)		32		
Thermal Resistance, Junction to Ambient Air	(Note 7)	$R_{ hetaJA}$	59	°C/W	
	(Note 8)		80	C/VV	
Thermal Resistance, Junction to Leads	(Note 9)	$R_{ heta JL}$	3.6		
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C		

ESD Ratings (Note 10)


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С

Notes:

- 6. For a device mounted with the exposed collector pad on 50mm x 50mm 2oz copper that is on a single-sided 1.6mm FR-4 PCB; device is measured under still air conditions whilst operating in a steady-state.
- 7. Same as note (6), except mounted on 25mm x 25mm 1oz copper.
- 8. Same as note (6), except mounted on minimum recommended pad (MRP) layout.
- 9. Thermal resistance from junction to solder-point (on the exposed collector pad).
- 10. Refer to JEDEC specification JESD22-A114 and JESD22-A115.



Thermal Characteristics

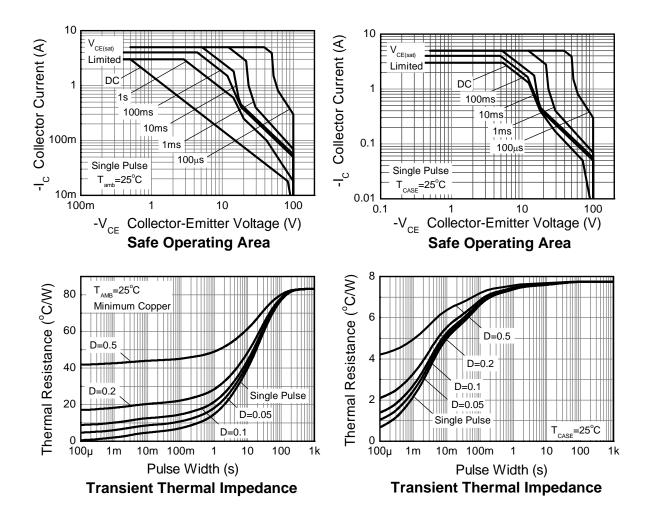




Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	-120	-	_	V	I _C = -20μA
Collector-Emitter Breakdown Voltage (Note 11)	BV _{CEO}	-100	-	-	V	$I_C = -30 \text{mA}$
Emitter-Base Breakdown Voltage	BV _{EBO}	-7	-		V	$I_E = -100 \mu A$
Collector-Base Cut-off Current	I _{CBO}	_	-	-1	μΑ	V _{CB} = -100V
Collector Cut-off Current	I _{CEO}	-	_	-1	μΑ	$V_{CE} = -60V$
Collector Cut-off Current	I _{CES}	-	-	-1	μΑ	V _{CE} = -100V
Emitter Cut-off Current	I _{EBO}	-	-	-1	μΑ	V _{EB} = -5V
Oallanter Freitter Oakweling Vallana		_	-	-300	mV	I _C = -1A, I _B = -100mA
Collector-Emitter Saturation Voltage (Note 11)	V _{CE(sat)}	_	-	-500	mV	I _C = -2A, I _B = -200mA
(Note 11)	, ,	-	_	-700	mV	$I_C = -3A$, $I_B = -375mA$
Base-Emitter Saturation Voltage (Note 11)	V _{BE(sat)}	_	-	-1.2	V	I _C = -2A, I _B = -200mA
Base-Emitter Turn-On Voltage (Note 11)		-	_	-950	mV	$I_C = -1A$, $V_{CE} = -2V$
Base-Emiller Furn-On Vollage (Note 11)	V _{BE(on)}	_	-	-1.4	V	I _C = -3A, V _{CE} = -4V
DC Current Coin (Note 11)	h	25		-		$V_{CE} = -4V, I_{C} = -1A$
DC Current Gain (Note 11)	h _{FE}	10	1	50	_	$V_{CE} = -4V, I_{C} = -3A$
Current Signal Current Gain	H _{fe}	20	-	_	_	$V_{CE} = -10V$, $I_{C} = -0.5A$, $f = 1kHz$
Current Gain-Bandwidth Product	f _T	3.0	_	-	MHz	$I_C = -0.5A$, $V_{CE} = -10V$, $f = 1MHz$


Note: 11. Measured under pulsed conditions. Pulse width $\leq 300 \mu s$. Duty cycle $\leq 2\%$.





Typical Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)














Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

TO252 (DPAK)

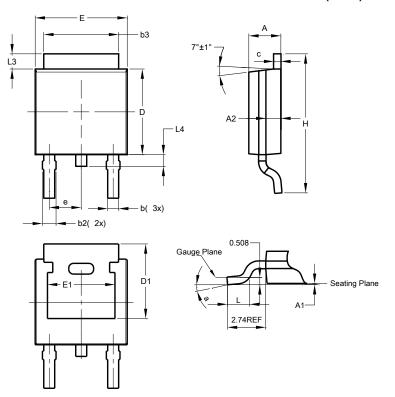


TO252 (DPAK)					
Dim	Min	Max	Тур		
Α	2.19	2.39	2.29		
A1	0.00	0.13	0.08		
A2	0.97	1.17	1.07		
b	0.64	0.88	0.783		
b2	0.76	1.14	0.95		
b3	5.21	5.46	5.33		
С	0.45	0.58	0.531		
D	6.00	6.20	6.10		
D1	5.21	-	-		
е	-	-	2.286		
Е	6.45	6.70	6.58		
E1	4.32	-	-		
Н	9.40	10.41	9.91		
L	1.40	1.78	1.59		
L3	0.88	1.27	1.08		
L4	0.64	1.02	0.83		
а	0°	10°	-		
All Dimensions in mm					

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

TO252 (DPAK)



Dimensions	Value (in mm)		
С	4.572		
Χ	1.060		
X1	5.632		
Υ	2.600		
Y1	5.700		
Y2	10.700		

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2017, Diodes Incorporated

www.diodes.com