

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



PLC-INTERFACE for input functions, consisting of PLC-BPT.../SEN basic terminal block with push-in connection and plug-in miniature relay with multi-layer gold contact, for mounting on DIN rail NS 35/7,5, 1 N/O contact, input voltage 230 V AC/220 V DC

### Your advantages

- ▼ Time savings of up to 60 %
- ✓ No need for additional modular terminal blocks
- ☑ Relay modules with safe isolation according to DIN EN 50178 between coil and contact
- Space savings of up to 80 %
- Sensor connected directly to relay module



### **Key Commercial Data**

Packing unit	10 pc
GTIN	4 046356 507387
GTIN	4046356507387

### Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area

### **Dimensions**

Width	6.2 mm
Height	80 mm
Depth	94 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C 55 °C
Ambient temperature (storage/transport)	-40 °C 85 °C



## Technical data

### Ambient conditions

Degree of protection	RT III (Relay)
	IP20 (Relay base)

### Coil side

Nominal input voltage U <sub>N</sub>	230 V AC
	220 V DC
Typical input current at U <sub>N</sub>	3.2 mA
Typical response time	7 ms
Typical release time	15 ms
Protective circuit	Bridge rectifier Bridge rectifier
Operating voltage display	Yellow LED
Power dissipation for nominal condition	0.74 W

### Contact side

Contact type	1 N/O contact
Type of switch contact	Single contact
Contact material	AgSnO, hard gold-plated
Maximum switching voltage	30 V AC
	36 V DC
Minimum switching voltage	100 mV (at 10 mA)
Min. switching current	1 mA (at 24 V)
Maximum inrush current	50 mA
Limiting continuous current	50 mA
Interrupting rating (ohmic load) max.	1 W (at 24 V DC)

### Contact side (with destroyed gold layer)

Note	the following values are applicable if a gold layer is destroyed
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (at 100 mA)
Limiting continuous current	6 A
Min. switching current	10 mA (at 12 V)
Interrupting rating (ohmic load) max.	140 W (at 24 V DC)
	20 W (at 48 V DC)
	18 W (at 60 V DC)
	23 W (at 110 V DC)
	40 W (at 220 V DC)
	1500 VA (for 250 V AC)
Switching capacity	2 A (at 24 V, DC13)
	0.2 A (at 110 V, DC13)
	0.1 A (at 220 V, DC13)
	3 A (at 24 V, AC15)
	3 A (at 120 V, AC15)



## Technical data

### Contact side (with destroyed gold layer)

General	
Test voltage relay winding/relay contact	4 kV AC (50 Hz, 1 min.)
Operating mode	100% operating factor
Market and a section 196	0.407

3 A (at 230 V, AC15)

Mechanical service life $2x \cdot 10^7$  cyclesMounting positionany

## Assembly instructions In rows with zero spacing

### Connection data

Connection name	Coil side
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm² 2.5 mm²
Conductor cross section flexible	0.14 mm² 2.5 mm²
	0.2 mm² 2.5 mm² (Single ferrule)
	2x 0.5 mm² 1 mm² (TWIN ferrule)
Conductor cross section AWG	26 14

### Connection data 2

Connection name	Contact side
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm² 2.5 mm²
Conductor cross section flexible	0.14 mm² 2.5 mm²
	0.2 mm² 2.5 mm² (Single ferrule)
	2x 0.5 mm² 1 mm² (TWIN ferrule)
Conductor cross section AWG	26 14

### Standards and Regulations

Connection in acc. with standard	CUL
Designation	Standards/regulations
Standards/regulations	IEC 60664
	IEC 60664A
	DIN VDE 0110
	DIN EN 50178/VDE 0160 (in relevant parts)
	DIN EN 50178/VDE 0160
	IEC 60255/DIN VDE 0435 (in relevant parts)
Pollution degree	3
Overvoltage category	III

### **Environmental Product Compliance**

REACh SVHC	Lead 7439-92-1




## Technical data

### **Environmental Product Compliance**

China RoHS	Environmentally Friendly Use Period = 50	
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"	


### **Drawings**

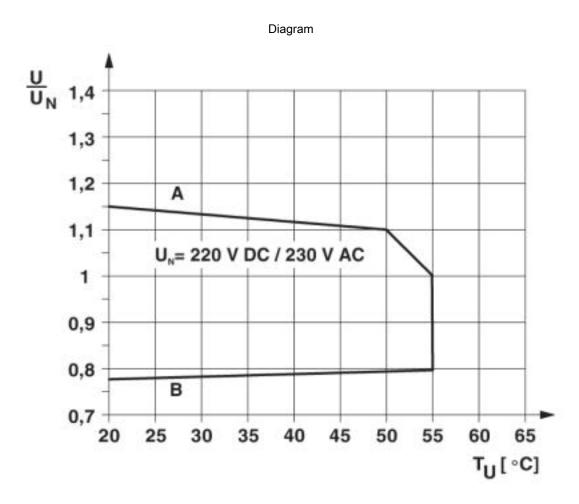

Curve A Maximum permissible continuous voltage  $U_{max}$  with limiting continuous current on the contact side (see relevant technical data) Curve B Minimum permissible operate voltage  $U_{op}$  after pre-excitation (see relevant technical data)





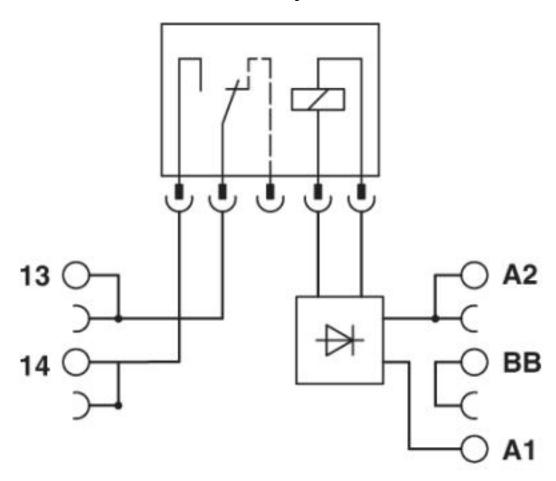

### Articles in set

Relay base - PLC-BPT-230UC/ 1/SEN - 2900452



6.2 mm PLC basic terminal block for input functions with push-in connection, without relay or solid-state relay, for mounting on DIN rail NS 35/7,5, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 230 V AC/DC

Single relay - REL-MR- 60DC/21AU - 2961134



Plug-in miniature power relay, with multi-layer gold contact, 1 PDT, input voltage 60 V DC



11clay Woddie - 1 20-11 1-2000/ 170/0211 - 2000010						
Approvals						
Approvals						
Approvals						
	cl II Recognized / cl II	Listed / RC FRT / DNV GL / EAC / EAC / cULus Recognized / cULus Liste	4			
	TO E NCCOGNIZED 7 COL	Elsied / NOT NT / BIV GE / EAO / EAO / GOEds Neddgriized / GoEds Elsie	u			
Ex Approvals						
Approval details						
UL Listed	UL	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140			
UL Recognized	<b>7</b> .	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705			
cUL Recognized	. <b>A1</b>	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705			
cUL Listed	C UL	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140			
RC FRT	Сект		B.00094			
DNV GL	TIV.	https://approvalfinder.dnvgl.com/	TAE0000196-02			
EAC	EAC		TR_TS_D_00573_c			
EAC	EAC		TR_TS_S_00010_c			



## Approvals

cULus Recognized



cULus Listed



Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com