

### Is Now Part of



## ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



January 2016

## BC556 / BC557 / BC558 / BC559 / BC560 PNP Epitaxial Silicon Transistor

### **Features**

· Switching and Amplifier

• High-Voltage: BC556, V<sub>CEO</sub> = -65 V

• Low-Noise: BC559, BC560

• Complement to BC546, BC547, BC548, BC549, and BC550



## **Ordering Information**

Part Number	Marking	Package	Packing Method	
BC556ABU	BC556A	TO-92 3L	Bulk	
BC556ATA	BC556A	TO-92 3L	Ammo	
BC556BTA	BC556B	TO-92 3L	Ammo	
BC556BTF	BC556B	TO-92 3L	Tape and Reel	
BC556BTFR	BC556B	TO-92 3L	Tape and Reel	
BC557ATA	BC557A	TO-92 3L	Ammo	
BC557BTA	BC557B	TO-92 3L	Ammo	
BC557BTF	BC557B	TO-92 3L	D-92 3L Tape and Reel	
BC558BTA	BC558B	TO-92 3L	TO-92 3L Ammo	
BC559BTA	BC559B	TO-92 3L Ammo		
BC559CTA	BC559C	TO-92 3L Ammo		
BC560CTA	BC560C	TO-92 3L	Ammo	

### **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at  $T_A = 25^{\circ}\text{C}$  unless otherwise noted.

Symbol	Parame	Value	Unit		
		BC556	-80		
V <sub>CBO</sub>	Collector-Base Voltage	BC557 / BC560	-50	V	
		BC558 / BC559	-30		
V <sub>CEO</sub>		BC556	-65		
	Collector-Emitter Voltage	BC557 / BC560	-45	V	
		BC558 / BC559	-30		
V <sub>EBO</sub>	Emitter-Base Voltage		-5	V	
I <sub>C</sub>	Collector Current (DC)		-100	mA	
I <sub>CP</sub>	Peak Collector Current (Pulse)		-200	mA	
I <sub>BP</sub>	Peak Base Current (Pulse)		-200	mA	
TJ	Junction Temperature		150	°C	
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C	

### Thermal Characteristics(1)

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Max.	Unit
D	Total Power Dissipation	500	mW
P <sub>D</sub>	Derate Above 25°C	4.0	mW/°C
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	250	°C/W

### Note:

1. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

## **Electrical Characteristics**

Values are at  $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter		Conditions	Min.	Тур.	Max.	Unit	
I <sub>CBO</sub>	Collector Cut-Off Current		$V_{CB} = -30 \text{ V}, I_{E} = 0$			-15	nA	
h <sub>FE</sub>	DC Curr	ent Gain	$V_{CE} = -5 \text{ V}, I_{C} = -2 \text{ mA}$	110		800		
\/ (cot)	Collector-Emitter Saturation		$I_C = -10 \text{ mA}, I_B = -0.5 \text{ mA}$		-90	-300	mV	
V <sub>CE</sub> (sat) Voltage			$I_C = -100 \text{ mA}, I_B = -5 \text{ mA}$		-250	-650	mv	
V <sub>BE</sub> (sat) Collector-Bas		r Page Caturation Voltage	$I_C = -10 \text{ mA}, I_B = -0.5 \text{ mA}$		-700		mV	
		r-base Saturation voltage	$I_C = -100 \text{ mA}, I_B = -5 \text{ mA}$		-900			
\/ (on)	V <sub>RF</sub> (on) Base-Emitter On Voltage		$V_{CE} = -5 \text{ V}, I_{C} = -2 \text{ mA}$	-600	-660	-750	m\/	
V <sub>BE</sub> (on)	Dase-Ell	Tiller Off Vollage	$V_{CE} = -5 \text{ V}, I_{C} = -10 \text{ mA}$			-800	- mV	
f <sub>T</sub>	Current Gain Bandwidth Product		$V_{CE} = -5 \text{ V, } I_{C} = -10 \text{ mA,}$ f = 10 MHz		150		MHz	
C <sub>ob</sub>	Output Capacitance		$V_{CB} = -10 \text{ V}, I_{E} = 0, f = 1 \text{ MHz}$			6	pF	
NF Noise Figure		BC556 / BC557 / BC558	$V_{CF} = -5 \text{ V}, I_{C} = -200 \mu\text{A},$		2	10		
	Noise	BC559 / BC560	$f = 1 \text{ kHz}, R_G = 2 \text{ k}\Omega$		1	4	dB	
	Figure	BC559	$V_{CE} = -5 \text{ V}, I_{C} = -200 \mu\text{A},$		1.2	4.0	uБ	
	BC560	$R_G = 2 \text{ k}\Omega$ , f = 30 to 15000 MHz		1.2	2.0			

## h<sub>FE</sub> Classification

Classifica	ation	4	В	С
h <sub>FE</sub>			200 ~ 450	420 ~ 800

## **Typical Performance Characteristics**




Figure 1. Static Characteristic




Figure 3. Collector-Emitter Saturation Voltage




Figure 5. Base-Emitter On Voltage




Figure 2. DC Current Gain




Figure 4. Base-Emitter Saturation Voltage




Figure 6. Collector Output Capacitance

## **Typical Performance Characteristics** (Continued)




Figure 7. Current Gain Bandwidth Product




Figure 9. Normalized Transient Thermal Resistance




Figure 8. Power Deration

# **Physical Dimensions** $\binom{0.81}{0.79}$ 15.62 13.20 2 0.52 0.56 0.36 1.27 NOTES: UNLESS OTHERWISE SPECIFIED DRAWING WITH REFERENCE TO JEDEC TO-92 RECOMMENDATIONS. ALL DIMENSIONS ARE IN MILLIMETERS. DRAWING CONFORMS TO ASME Y14.5M-2009. DRAWING FILENAME: MKT-ZAO3DREV4. A)


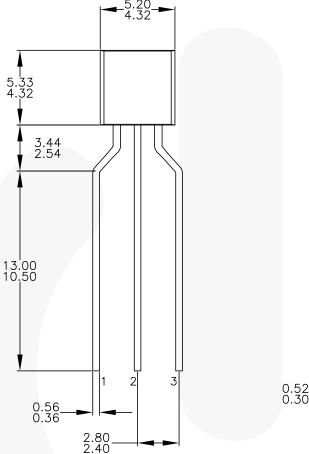






Figure 10. 3-LEAD, TO92, JEDEC TO-92 COMPLIANT STRAIGHT LEAD CONFIGURATION, BULK

## Physical Dimensions (Continued)







### NOTES: UNLESS OTHERWISE SPECIFIED

- DRAWING CONFORMS TO JEDEC MS-013, VARIATION AC.
  ALL DIMENSIONS ARE IN MILLIMETERS.
  DRAWING CONFORMS TO ASME Y14.5M-2009.
  DRAWING FILENAME: MKT-ZAO3FREV3.
  FAIRCHILD SEMICONDUCTOR.

Figure 11. 3-LEAD, TO92, MOLDED 0.200 IN LINE SPACING LEAD FORM, AMMO, TAPE AND REEL





#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ F-PFS™ AttitudeEngine™ FRFET<sup>®</sup> Awinda® AX-CAP®\* Global Power Resource SM GreenBridge™

BitSiC™ Green FPS™ Build it Now™ Green FPS™ e-Series™

CorePLUS™ Gmax™ GTO™ CorePOWER™  $CROSSVOLT^{\text{\tiny TM}}$ IntelliMAX™  $\mathsf{CTL}^\mathsf{TM}$ ISOPI ANAR™

Current Transfer Logic™ Making Small Speakers Sound Louder **DEUXPEED**® and Better™

Dual Cool™ MegaBuck™ EcoSPARK® MICROCOUPLER™ EfficientMax™ MicroFET™ MicroPak™ ESBC™ MicroPak2™

MillerDrive™ Fairchild® MotionMax™ Fairchild Semiconductor® MotionGrid® FACT Quiet Series™ MTi<sup>®</sup> FACT MTx® FastvCore™ MVN® FFTBench™

mWSaver® **FPS™** OptoHiT™ OPTOLOGIC® OPTOPLANAR®

Power Supply WebDesigner™

PowerTrench PowerXS™

Programmable Active Droop™

QFĔT QS™ Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM<sup>®</sup> STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS<sup>®</sup>

SyncFET™ Sync-Lock™ SYSTEM GENERAL®\*

TinyBoost® TinyBuck<sup>®</sup> TinyCalc™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinvWire™ TranSiC™

TriFault Detect™ TRUECURRENT®\* μSerDes™

UHC<sup>®</sup> Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XSTM Xsens™ 仙童®

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR <u>AIRCHILDSEMI.COM.</u> FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN. WHICH COVERS THESE PRODUCTS.

### **AUTHORIZED USE**

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application - including life critical medical equipment - where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com,

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors

### PRODUCT STATUS DEFINITIONS

### Definition of Terms

Definition of Terms				
Datasheet Identification	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 177

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

### **PUBLICATION ORDERING INFORMATION**

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative