Data sheet | Item number: 855-5001/750-000


Split-core current transformer; Primary rated current 750 A; Secondary

rated current: 1 A; Rated power: 0.5 VA; Accuracy class: 0.5

www.wago.com/855-5001/750-000






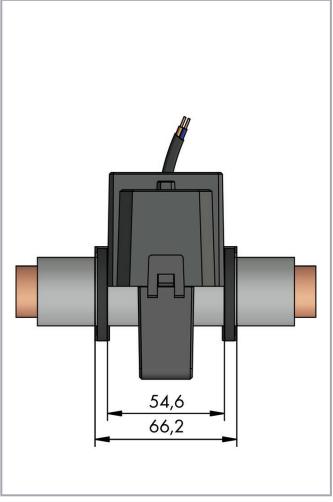

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$



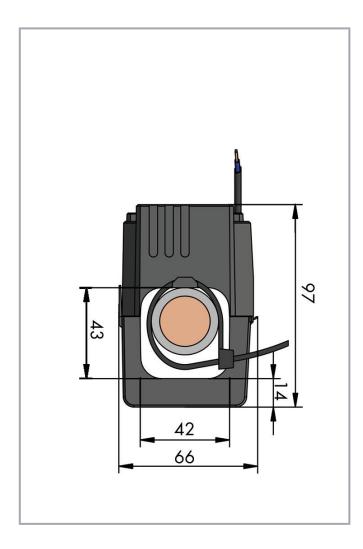

Item description

Short description:

WAGO's compact split-core current transformers are ideal for retrofitting existing systems. They are perfect for applications in which the current path must not be disrupted. The transformer's accuracy permits extremely precise current measurements. The split-core current transformers are capable of supplying the specified rated power at the end of the secondary cable. All transformers are supplied with color-coded cables. Two UV-resistant cable ties are also included for secure and easy mounting.

Features:

- Current ratios from 750 A (primary side) and 1 A (secondary side)
- No primary cable interruption
- Ideal for use in very confined spaces
- Rapid mounting
- For use around insulated cables (up to 42 mm Ø)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 855-5001/750-000

www.wago.com/855-5001/750-000



- Compact and hinged
- Color-coded connection cable (5 m)

Data

Technical data

Input Current Transformers

Primary rated current	750 A
Rated continuous thermal current I _{cth}	100 %
Rated short-time thermal current I _{th}	60 x I _N / 1 s
Rated surge current I _{dyn}	2.5 x I _{th}
Rated frequency	50 60 Hz

Output (current transformer)

Secondary rated current	1 A
Rated power S _r	0.5 VA

Measurement Error

Accuracy class	0.5	

Safety and protection

Highest voltage for equipment U _m	AC 720 V _{rms}
Protection type	IP20

Test voltage

Test voltage	AC 3 kV; 50 Hz; 1 min

Connection data

Feedthrough for measurement conductor	Ø 42 mm
Cable type	2 x 0.5 mm²; fine-stranded
Color code	brown = S1; blue = S2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Data sheet | Item number: 855-5001/750-000

www.wago.com/855-5001/750-000



Physical data

Cable length 5 m

Mechanical Data

Mounting type	Split-core current transformer (suspended)

Material Data

Flammability class per UL94	V2
Weight	690 g

Environmental requirements

Ambient temperature (operation)	-10 +55 ℃
Ambient temperature (storage)	-20 +70 °C
Relative humidity	5 85 % (without condensation)
Operating altitude (max.)	2000 m

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61869-1
	EN 61869-2

Commercial data

ETIM 8.0	EC002048
ETIM 7.0	EC002048
PU (SPU)	1 pcs
Packaging type	box
Country of origin	NL
GTIN	4055143950497
Customs tariff number	85043180888

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
ERE	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011,TP TC 020/2011	EAC RU C- DE.AM02. B.00111 /19

Optional accessories

Signal conditioner

Current signal conditioner

Item no.: 857-551

Current signal conditioner; Current input signal; Current and voltage output signal; Digital output; www.wago.com/857-551

Configuration via software; Supply voltage: 24 VDC; 6 mm module width

Downloads

Documentation

Bid Text

docx - Datei	docx		Download	
		15.6 kB		
X81 - Datei		xml	Download	
		5.5 kB		
Instruction Leaflet				
Kabelumbau-Stromwandler	V 1.1.0	pdf	Download	

Engineering-Software

Configuration and Commissioning Software

WAGO Interface Configuration Software G2 FULL

1.00.10.01

exe Download

The full setup, in addition to the WAGO Interface Configuration Software G2, includes the installation for the Microsoft .NET Framework.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

2020 Jan 15

832.5 kB



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 855-5001/750-000

URL

Download

Split-core current transformer; Primary rated current 750 A; Secondary rated current:

1 A; Rated power: 0.5 VA; Accuracy class: 0.5

Installation Notes

Installation





Simple termination!

Quick and easy mounting!



 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.