# Product data sheet Characteristics

### XPSMCMCO0000PBG

Profibus DP diagnostics expansion module, Modicon MCM, spring term





### Main

Modicon MCM
Non-safe communication module
XPSMCM
24 V - 2020 % DC

#### Complementary

Power dissipation in W	3 W
Quality labels	CE
Range Compatibility	Preventa XPSMCM
Connector type	Female SUB-D 9
Number of port	1
Method of access	Server
Transmission rate	500 kbit/s 9.6 kbit/s 19.2 kbit/s 45.45 kbit/s 93.75 kbit/s 187.5 kbit/s 1.5 kbit/s 3 Mbit/s 6 Mbit/s
Communication part protocol	Profibus DP
Communication port protocol	1 111
Current Consumption	0.125 mA
Maximum cable distance between devices	3280.84 Ft (1000 m) 328.08 Ft (100 m) 3937.01 Ft (1200 m) 1312.34 Ft (400 m) 656.17 ft (200 m)
Local signalling	LED green PWR power ON LED green RUN operating LED red E IN internal error LED red E EX external error LED green/red STS communication status LED green/red Mode connection state
Connections - terminals	2 spring clamp terminals, removable terminal block
Cable cross section	0.000.00 ln² (0.22.5 mm²) - AWG 24AWG 14 flexible without cable end 0.000.00 ln² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, with bezel 0.000.00 ln² (0.252.5 mm²) - AWG 23AWG 14 flexible with cable end, without bezel 0.000.00 ln² (0.22.5 mm²) - AWG 24AWG 14 solid without cable end 0.000.00 in² (0.22.5 mm²) - AWG 24AWG 18 flexible with cable end, with double bezel
Mounting support	Omega 35 mm DIN rail EN 50022
Width	0.89 in (22.5 mm)
Height	3.90 in (99 mm)

Depth	4.51 in (114.5 mm)
Net Weight	0.66 lb(US) (0.3 kg)

### Environment

Product Certifications	CULus RCM TÜV
IP Degree of Protection	IP20
Ambient Air Temperature for Operation	14131 °F (-1055 °C)
Ambient Air Temperature for Storage	-4185 °F (-2085 °C)
Relative humidity	1095 %
Pollution degree	2
Insulation	250 V AC between power supply and housing EN/IEC 61800-5-1
Overvoltage category	II
Electromagnetic compatibility	Electrostatic discharge immunity test 6 kV on contact) EN/IEC 61000-4-2 Electrostatic discharge immunity test 20 kV on air) EN/IEC 61000-4-2 Susceptibility to electromagnetic fields 10 V/m 801000 MHz) EN/IEC 61000-4-3 Susceptibility to electromagnetic fields 30 V/m 1.4 GHz2 GHz) EN/IEC 61000-4-3
Vibration resistance	+/-0.35 mm 1055 Hz)EN/IEC 61496-1
Shock resistance	10 gn 16 ms) 1000 shocks on each axis EN/IEC 61496-1
Operating altitude	6561.68 ft (2000 m)
Service Life	20 year(s)

### Ordering and shipping details

Category	22477-SAFETY MODULES (PREVENTA)
Discount Schedule	SAF2
GTIN	3606480748479
Nbr. of units in pkg.	1
Package weight(Lbs)	7.51 oz (213.0 g)
Returnability	No
Country of origin	IT

### Packing Units

r acking Office	
Unit Type of Package 1	PCE
Package 1 Height	1.77 in (4.5 cm)
Package 1 width	5.04 in (12.8 cm)
Package 1 Length	6.38 in (16.2 cm)
Unit Type of Package 2	S01
Number of Units in Package 2	6
Package 2 Weight	3.34 lb(US) (1.514 kg)
Package 2 Height	5.91 in (15.0 cm)
Package 2 width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)

### Offer Sustainability


Sustainable offer status	Green Premium product	
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Regulation	☑ REACh Declaration	
REACh free of SVHC	Yes	
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
Mercury free	Yes	
RoHS exemption information	₫Yes	

China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

# XPSMCMCO0000PBG

### **Dimensions**


### Spring Terminal

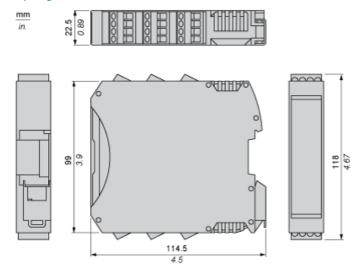


## XPSMCMCO0000PBG

### Mounting Safety Controller CPU with Module(s)

### Mount BackPlane Connector on Rail









- 1: Connect as much Backplane Connector as module to be install.
- 2: Fix the connectors to the rail (Top first).

### Mount Safety Controller CPU with Other Module(s)







- 1: Mount controller CPU and modules on rail.
- 2: Make sure that the controller CPU or the module(s) are plugged on the BackPlane connector.

# XPSMCMCO0000PBG

#### Connection & Schema


#### PROFIBUS DP Connector



Description	PBUS (PROFIBUS DP) standard communication device	
Wiring	PIN/Signal/ Description	
	1/ not connected	
	2/ not connected	
	3 / B Line / Positive RxD/TxD, RS485 level	
	4 / RTS / Request to send	
	5 / GND Bus/ ground (isolated)	
	6 / +5 V Bus Output / +5V termination power (isolated, short-circuit protected)	
	7 / not connected	
	8 / A Line /Negative RxD/TxD, RS485 level	
	9 / not connected housing / cable Shield / Internally connected to the protective earth via cable shield filters according to the PROFIBUS standard	
Data sets	Input status, input diagnostics,	
	fieldbus input status, probe status,	
	safety output status, safety output diagnostics	

### Wiring

### **Terminal Designation**



Terminal	Signal	Description
1	24 VDC	24 Vdc power supply
2	_	Not connected
3		
4	0 VDC	0 Vdc power supply
5	-	Not connected

Terminal	Signal	Description
6		
7		
8		

### Wiring Example

