

0.35Ω Low-Voltage Dual-DPDT Analog Switch

General Description

The AOZ6275 is a dual Double-Pole, Double-Throw (DPDT) analog switch that is designed to operate from a single 1.65 V to 4.3 V supply. The AOZ6275 features an ultra-low on resistance, excellent Total Harmonic Distortion (THD) performance, and low power consumption.

The device also features fast switching and guaranteed Break-Before-Make (BBM) switching which interrupts one circuit before closing the other. This ensures the switches never shorts the driver.

Features


- Low On Resistance (R_{ON}) for +2.7 V supply (0.35 Ω)
- Low I_{CCT} current when nS input is lower than V_{CC}
- 0.25 Ω maximum R_{ON} flatness for +2.7 V supply
- Small 1.8 mm x 2.6 mm 16-Lead QFN Package
- Broad 1.65 V to 4.30 V V_{CC} operating range
- Low THD (0.01% typical for 32 Ω load)

Applications


- Cell phone
- PDA
- Portable media player



Typical Application

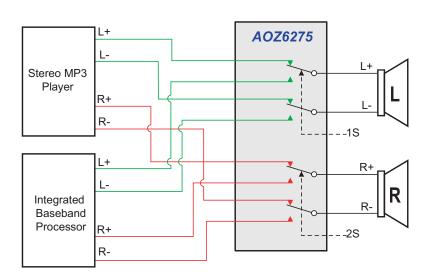

Connection Diagram

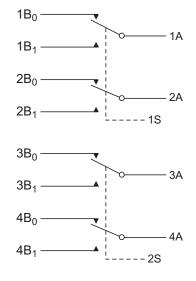



Ordering Information


| Part Number | Ambient Temperature Range | Package | Environmental |
|-------------|---------------------------|-----------------------------|---------------|
| AOZ6275QI | -40 °C to +85 °C | 1.8 mm x 2.6 mm 16-Lead QFN | Green |



AOS Green Products use reduced levels of Halogens, and are also RoHS compliant.

Please visit www.aosmd.com/web/quality/rohs_compliant.jsp for additional information.

Pin Configuration



QFN-16 (Top Thru View)

Pin Description

| Pin Name | Function |
|--|---------------|
| 1A, 2A, 3A, 4A, 1B ₀ , 1B ₁ , 2B ₀ , 2B ₁ , 3B ₀ , 3B ₁ , 4B ₀ , 4B ₁ | Data Ports |
| 1S, 2S | Control Input |

Truth Table

| Logic Input | Function |
|-------------|---------------------------------|
| 0 | nB ₀ Connected to nA |
| 1 | nB ₁ Connected to nA |

Absolute Maximum Ratings

Exceeding the Absolute Maximum Ratings may damage the device.

| Symbol | Parameter | Rating |
|---------------------|---|---------------------------------|
| V _{CC} | Supply Voltage | -0.5 V to +4.6 V |
| V _S | Switch Voltage | -0.5 to V _{CC} + 0.3 V |
| V _{IN} | Input Voltage | -0.5 V to +4.6 V |
| I _{IK} | Minimum Input Diode Current | -50 mA |
| I _{SW} | Switch Current | 350 mA |
| I _{SWPEAK} | Peak Switch Current (Pulsed at 1 ms duration, <10 % Duty Cycle) | 500 mA |
| T _{STG} | Storage Temperature Range | -65 °C to +150 °C |
| T _J | Maximum Junction Temperature | +150 °C |
| T _L | Lead Temperature (Soldering, 10 seconds) | +260 °C |
| ESD | Human Body Model | 8000 V |

Recommend Operating Ratings

The device is not guaranteed to operate beyond the Recommended Operating Ratings.

| Symbol | Parameter | Rating |
|-----------------|--------------------------------------|------------------------|
| V _{CC} | Supply Voltage | 1.65 V to 4.3 V |
| V _{IN} | Control Input Voltage ⁽¹⁾ | 0 V to V _{CC} |
| V _{SW} | Switch Input Voltage | 0 V to V _{CC} |
| T _A | Operating Temperature | -40 °C to +85 °C |

Note:

^{1.} Unused inputs must be held HIGH or LOW. They may not float.



DC Electrical Characteristics

Unless otherwise indicated, specifications indicate a temperature range of -40 $^{\circ}$ C to +85 $^{\circ}$ C. All typical values are at 25 $^{\circ}$ C unless otherwise specified.

| Symbol | Parameter | Conditions | V _{CC} (V) | Min. | Тур. | Max. | Units |
|--|---|---|---------------------|------|------|------|-------|
| V _{IH} | Input Voltage HIGH | | 4.3 | 1.4 | | | V |
| | | | 2.7 to 3.6 | 1.3 | | | 1 |
| | | | 2.3 to 2.7 | 1.1 | | | 1 |
| | | | 1.65 to 1.95 | 0.9 | | | 1 |
| V _{IL} | Input Voltage LOW | | 4.3 | | | 0.7 | V |
| | | | 2.7 to 3.6 | | | 0.5 |] |
| | | | 2.3 to 2.7 | | | 0.4 |] |
| | | | 1.65 to 1.95 | | | 0.4 |] |
| I _{IN} | Control Input Leakage | V _{IN} = 0 V to V _{CC} | 1.65 to 4.30 | -0.5 | | 0.5 | μA |
| I _{NO(OFF)} , I _{NC(OFF)} | Off-Leakage Current of Port nB ₀ and nB ₁ | $nA = 0.3 \text{ V}, V_{CC} - 0.3 \text{ V}, nB_0 \text{ or } nB_1 = 0.3 \text{ V}, V_{CC} - 0.3 \text{ V} \text{ or floating}$ | 1.95 to 4.30 | -50 | | 50 | nA |
| I _{A(ON)} | On Leakage Current of Port A | $nA = 0.3 \text{ V}, V_{CC} - 0.3 \text{V}, \\ nB_0 \text{ or } nB_1 = 0.3 \text{ V}, V_{CC} - 0.3 \text{ V} \text{ or floating}$ | 1.95 to 4.30 | -60 | | 60 | nA |
| R _{ON} | Switch On Resistance ⁽²⁾ | I _{OUT} = 100 mA, nB ₀ or nB ₁ = 0 V, 0.7 V, 2.3 V, or 4.3 V | 4.3 | | 0.30 | 0.4 | Ω |
| | | I _{OUT} = 100 mA, nB ₀ or nB ₁ = 0 V, 0.7 V, 2.3 V, or 3.0 V | 3.0 | | 0.30 | 0.5 | |
| | | I _{OUT} = 100 mA, nB ₀ or nB ₁ = 0 V, 0.7 V, 2.0 V, or 2.7 V | 2.7 | | 0.35 | 0.5 | |
| | | I _{OUT} = 100 mA, nB ₀ or nB ₁ = 0 V, 0.7 V, 1.6 V, or 2.3 V | 2.3 | | 0.45 | 0.7 | |
| | | I _{OUT} = 100 mA, nB ₀ or nB ₁ = 0 V, 1.0 V, or 1.8 V | 1.8 | | 1.0 | 1.8 | |
| ΔR_{ON} | On Resistance Matching | I _{OUT} = 100 mA, | 4.3 | | 0.03 | 0.1 | Ω |
| | Between Channels ⁽³⁾ | $nB_0 \text{ or } nB_1 = 0.7 \text{ V}$ | 3.0 | | 0.03 | 0.1 | 1 |
| | | | 2.7 | | 0.03 | 0.1 | 1 |
| | | | 2.3 | | 0.03 | 0.1 | 1 |
| R _{FLAT(ON)} | On Resistance Flatness ⁽⁴⁾ | I _{OUT} = 100 mA, | 4.3 | | 0.07 | 0.2 | Ω |
| (- / | | nB_0 or $nB_1 = 0$ V to V_{CC} | 3.0 | | 0.07 | 0.2 | 1 |
| | | | 2.7 | | 0.09 | 0.25 | 1 |
| | | | 2.3 | | 0.16 | 0.3 | 1 |
| I _{CC} | Quiescent Supply Current | $V_{IN} = 0 \text{ V to } V_{CC}, I_{OUT} = 0 \text{ A}$ | 4.3 | -500 | | 500 | nA |
| I _{CCT} | Increase in I _{CC} per Input | V _{IN} = 1.8 V | 4.3 | | 26.0 | 40.0 | μA |
| | Control Voltage | V _{IN} = 2.6 V | | | 9.0 | 12.0 | 1 |

Notes:

- 2. On resistance is determined by the voltage drop between A and B pins at the indicated current through the switch.
- 3. ΔR_{ON} = R_{ONmax} R_{ONmin} measured at identical V_{CC} , temperature, and voltage.
- 4. Flatness is defined as the difference between the maximum and minimum value of R_{ON} over the specified range of conditions.

Rev. 1.0 February 2012 **www.aosmd.com** Page 3 of 10



AC Electrical Characteristics

Unless otherwise indicated, specifications indicate a temperature range of -40 $^{\circ}$ C to +85 $^{\circ}$ C. All typical values are at 25 $^{\circ}$ C unless otherwise specified.

| Symbol | Parameter | Conditions | V _{CC} (V) | Min. | Тур. | Max. | Units |
|------------------|------------------------|---|---------------------|------|------|------|-------|
| t _{ON} | Turn-On Time | nB_0 or nB_1 = 1.5 V, R_L = 50 Ω, C_L = 35 pF | 3.6 to 4.3 | | 35 | 70 | ns |
| | | | 2.7 to 3.6 | | 50 | 95 | |
| | | | 2.3 to 2.7 | | 75 | 105 | |
| t _{OFF} | Turn-Off Time | nB_0 or nB_1 = 1.5 V, R_L = 50 Ω, C_L = 35 pF | 3.6 to 4.3 | | 25 | 55 | ns |
| | | | 2.7 to 3.6 | | 30 | 60 | |
| | | | 2.3 to 2.7 | | 40 | 75 | |
| t _{BBM} | Break-Before-Make Time | nB_0 or nB_1 = 1.5 V, R_L = 50 Ω, C_L = 35 pF | 3.6 to 4.3 | | 10 | | ns |
| | | | 2.7 to 3.6 | | 20 | | |
| | | | 2.3 to 2.7 | | 35 | | |
| Q | Charge Injection | C_L = 100 pF, V_{GEN} = 0 V, R_{GEN} = 0 Ω | 3.6 to 4.3 | | 35 | | рC |
| | | | 2.7 to 3.6 | | 28 | | |
| | | | 2.3 to 2.7 | | 18 | | |
| OIRR | Off Isolation | f = 100 kHz, R_L = 50 $Ω$, C_L = 5 pF | 3.6 to 4.3 | | -70 | | dB |
| | | | 2.7 to 3.6 | | -70 | | |
| | | | 2.3 to 2.7 | | -70 | | |
| Xtalk | Crosstalk | $f = 100 \text{ kHz}, R_L = 50 \Omega, C_L = 5 \text{ pF}$ | 3.6 to 4.3 | | -70 | | dB |
| | | | 2.7 to 3.6 | | -70 | | |
| | | | 2.3 to 2.7 | | -70 | | |
| BW | -3dB Bandwidth | $R_L = 50 \Omega$ | 2.3 to 4.3 | | 70 | | MHz |
| THD | Total Harmonic | $R_L = 32 \Omega$, $V_{IN} = 2 V_{pp}$, $f = 20 Hz$ to 20 kHz | 3.6 to 4.3 | | 0.01 | | % |
| | Distortion | | 2.7 to 3.6 | | 0.01 | | |
| | | | 2.3 to 2.7 | | 0.01 | | |

Capacitance


Unless otherwise indicated, specifications indicate a temperature range of -40 $^{\circ}$ C to +85 $^{\circ}$ C. All typical values are at 25 $^{\circ}$ C unless otherwise specified.


| Symbol | Parameter | Conditions | V _{CC} (V) | Min. | Тур. | Max. | Units |
|------------------|-------------------------------|------------|---------------------|------|------|------|-------|
| C _{IN} | Control Pin Input Capacitance | f = 1 MHz | 3.3 | | 2.0 | | pF |
| C _{OFF} | B Port Off Capacitance | f = 1 MHz | 3.3 | | 16 | | pF |
| C _{ON} | A Port On Capacitance | f = 1 MHz | 3.3 | | 116 | | pF |


Rev. 1.0 February 2012 **www.aosmd.com** Page 4 of 10





Typical Performance Characteristics

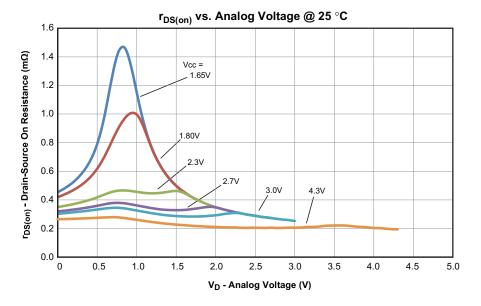

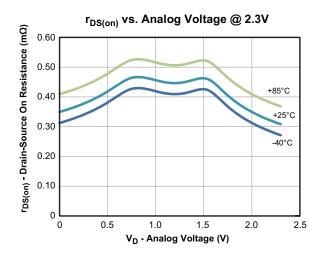

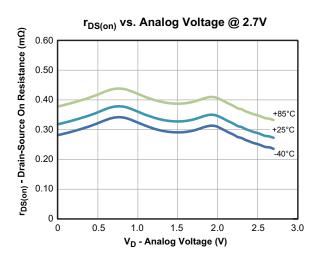


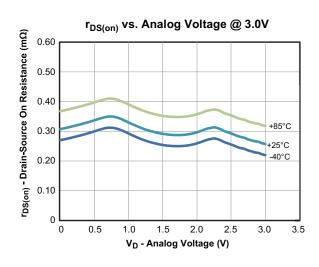


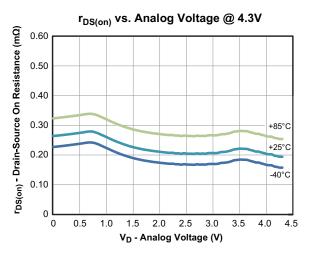



Typical Performance Characteristics (Continued)

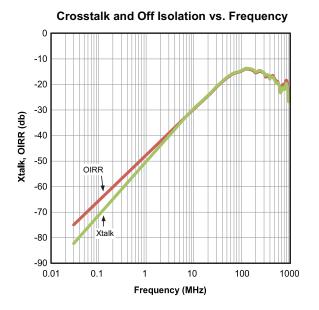

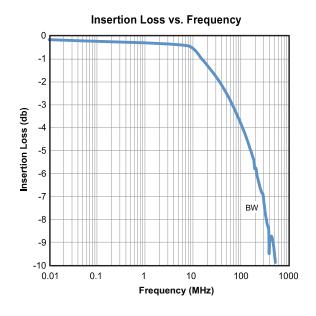



AC Loading and Waveforms

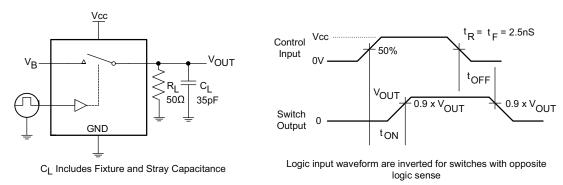


Figure 1. Turn-On/Turn-Off Timing

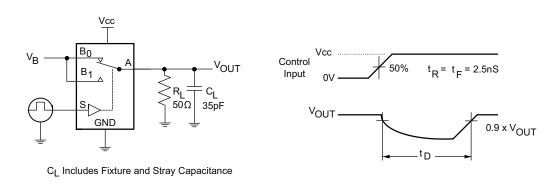
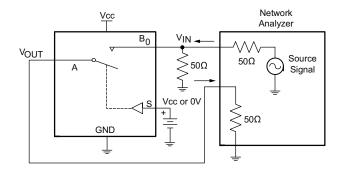



Figure 2. Break-Before-Make Timing





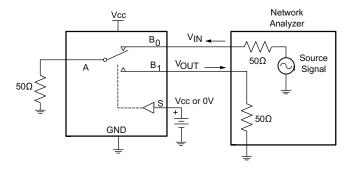


Figure 4. Crosstalk

Rev. 1.0 February 2012 **www.aosmd.com** Page 7 of 10



AC Loading and Waveforms (continued)

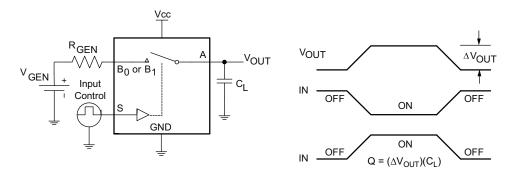


Figure 5. Charge Injection

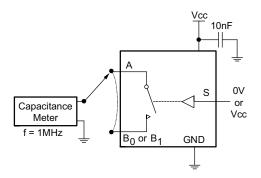


Figure 6. ON/Off Capacitance Measurement

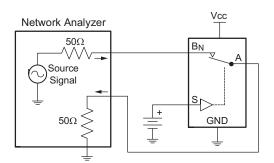


Figure 7. Bandwidth


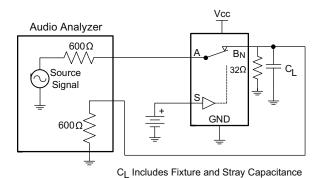



Figure 8. Harmonic Distortion

Rev. 1.0 February 2012 **www.aosmd.com** Page 8 of 10




Package Dimensions, QFN 1.8 mm x 2.6 mm, 16L




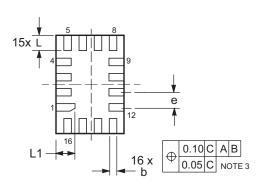

BOTTOM VIEW

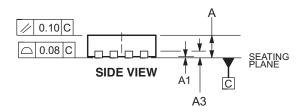

RECOMMENDED LAND PATTERN

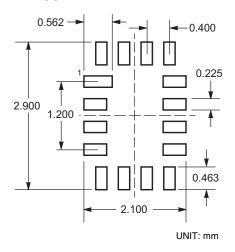

Dimensions in millimeters

| Symbols | Min. | Min. | | |
|---------|----------|-------|--|--|
| Α | 0.70 | 0.80 | | |
| A1 | 0.00 | 0.050 | | |
| А3 | 0.20 REF | | | |
| b | 0.15 | 0.25 | | |
| D | 1.80 BSC | | | |
| Е | 2.60 BSC | | | |
| е | 0.40 | BSC | | |
| L | 0.30 | 0.50 | | |
| L1 | 0.40 0.6 | | | |

Dimensions in inches


| Symbols | Min. | Min. | |
|---------|-------------|-------|--|
| Α | 0.028 | 0.031 | |
| A1 | 0.000 | 0.002 | |
| А3 | 0.008 REF | | |
| b | 0.006 0.010 | | |
| D | 0.071 BSC | | |
| Е | 0.102 BSC | | |
| е | 0.016 BSC | | |
| L | 0.012 0.02 | | |
| L1 | 0.016 | 0.024 | |

Notes:

- 1. Dimensioning and tolerancing per ASME Y14.5m, 1994.
- 2. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.
- 3. Dimension b applies to plated terminal and is measured between 0.25 mm and 0.30 mm from terminal.
- 4. Coplanarity applies to the exposed pad as well as the terminals.
- 5. Exposed pads connected to die flag. Used as test contacts.



Part Marking

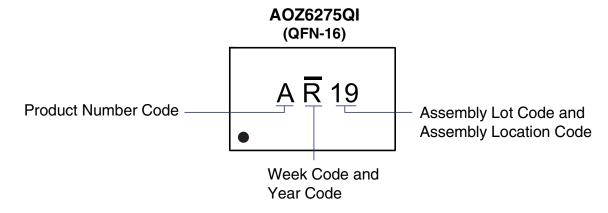

This datasheet contains preliminary data; supplementary data may be published at a later date. Alpha & Omega Semiconductor reserves the right to make changes at any time without notice.

LIFE SUPPORT POLICY

ALPHA & OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Rev. 1.0 February 2012 **www.aosmd.com** Page 10 of 10