

## **RONDA-WAS**

Asymmetric beam for wall washing with holder A compatible with 3rd party connectors from TE, Bender+Wirth and IDEAL

## **SPECIFICATION:**

Dimensions Ø 69.9 mm
Height 21.8 mm
Fastening socket
ROHS compliant yes



## **MATERIALS:**

ComponentTypeMaterialColourFinishF15156\_RONDA-WASSingle lensPMMAclearF15155\_RONDA-HLD-AHolderPCwhite

### **ORDERING INFORMATION:**

## **Quantities for one set:**


Single lens 1 Holder 1



# PRODUCT DATASHEET RONDA-WAS


Component		Qty in box	MOQ	MPQ	Box weight (kg)
F15156_RONDA-WAS  » Box size: 480 x 280 x 300 mm	Single lens	420	120	30	7.3
F15155_RONDA-HLD-A  » Box size: 480 x 280 x 300 mm	Holder	420	120	30	4.4

# PRODUCT DATASHEET RONDA-WAS

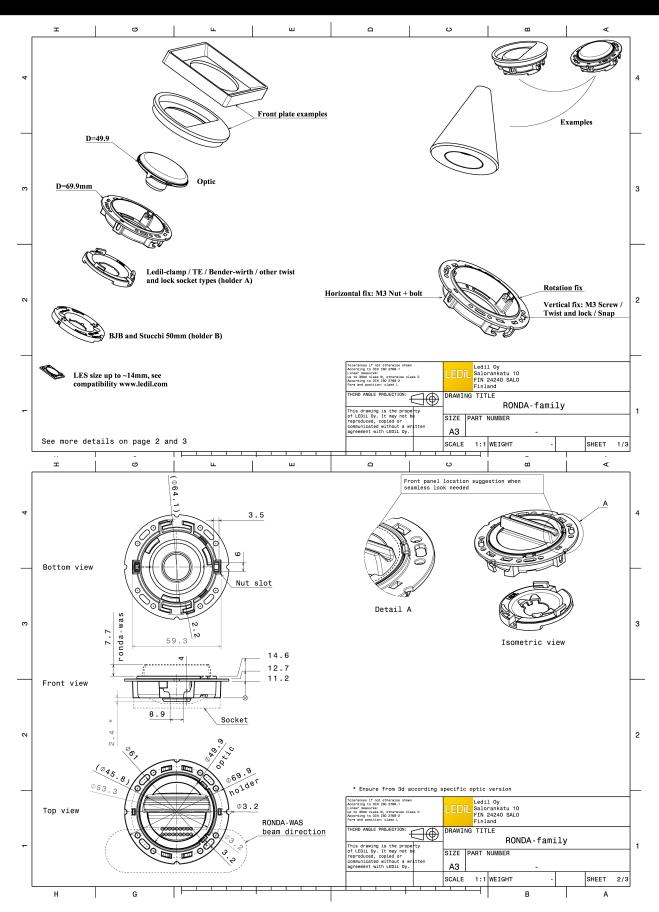




# PRODUCT DATASHEET RONDA-WAS

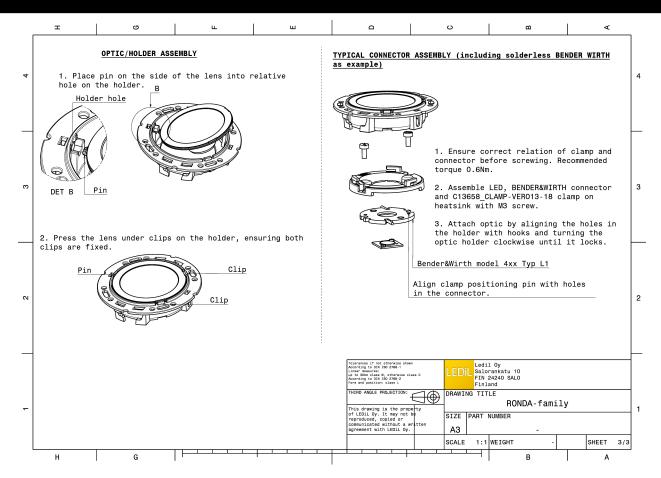

See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>

4/17



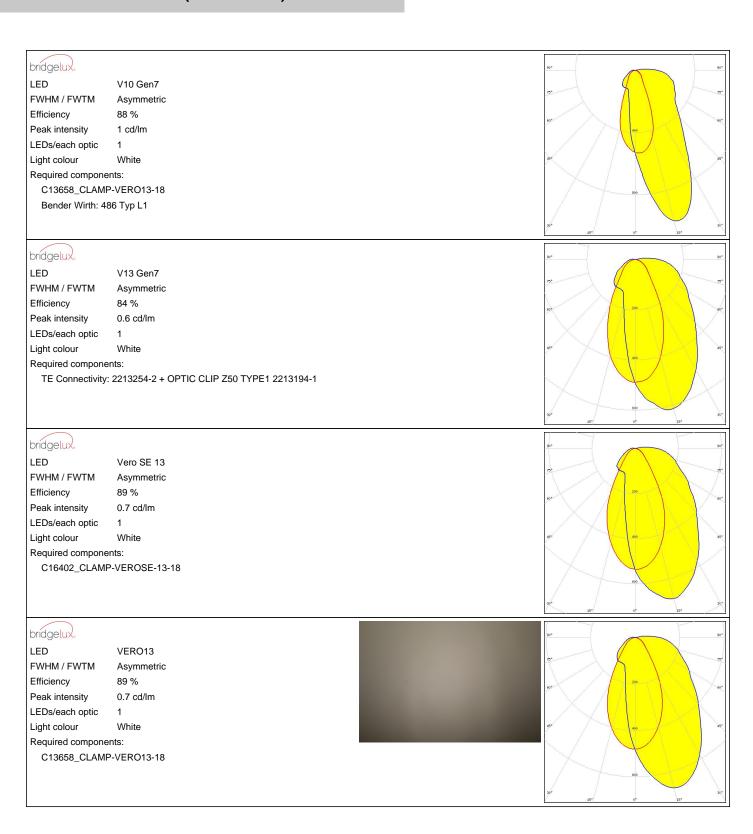



# **CITIZEN**


CLL03x/CLU03x

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 84 % Peak intensity 0.6 cd/lm

LEDs/each optic

Light colour White Required components:

IDEAL: 50-2103CT + 50-2100AN




# **CITIZEN**

LED CLL03x/CLU03x

FWHM / FWTM Asymmetric Efficiency 87 % Peak intensity 0.6 cd/lm LEDs/each optic 1

White Light colour Required components: C16791\_CLAMP-Z45-A

TE Connectivity: 2325807-3

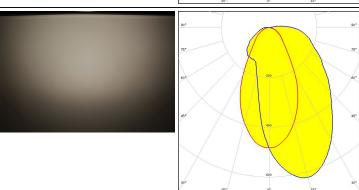


# **CITIZEN**

LED CLL04x/CLU04x

FWHM / FWTM Asymmetric Efficiency 84 % Peak intensity 0.5 cd/lm

LEDs/each optic Light colour White Required components:

IDEAL: 50-2204-CT + 50-2100AN




# **CITIZEN**

CLU730/731/733


FWHM / FWTM Asymmetric Efficiency 85 % Peak intensity 0.6 cd/lm LEDs/each optic 1

White Light colour Required components:

IDEAL: 50-2204-CT + 50-2100AN





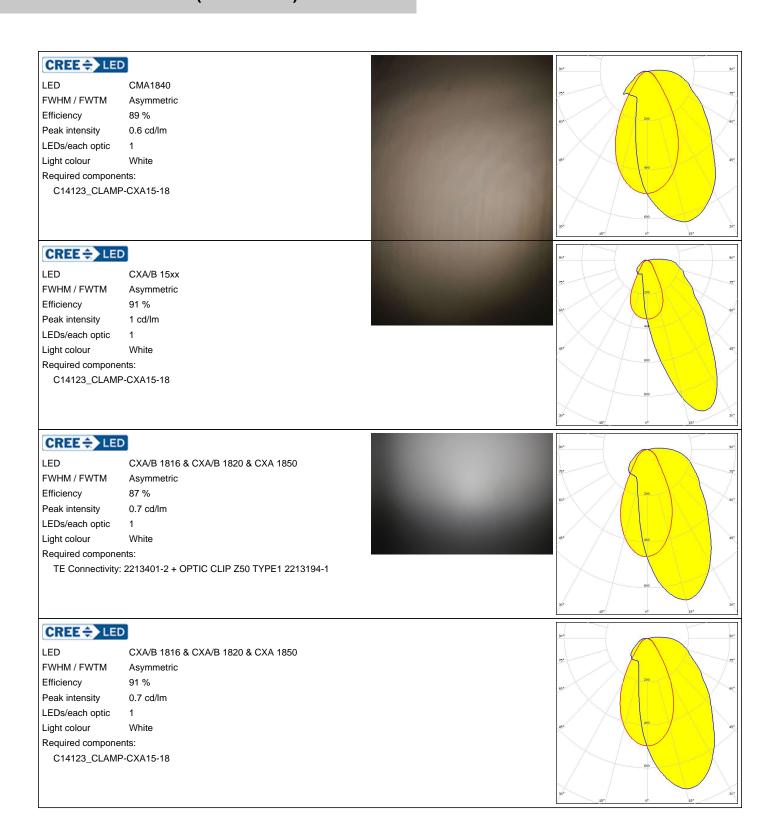




## **WNICHIA**

LED COB J-Type FWHM / FWTM Asymmetric

Efficiency 83 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

IDEAL: 50-2103NC + 50-2100AN




## **WNICHIA**

LED COB L-Type (LES 11)

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

IDEAL: 50-2100NC + 50-2100AN




## **WNICHIA**

LED COB L-Type (LES 11)

FWHM / FWTM Asymmetric
Efficiency 87 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White

TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1




# **OSRAM**

Required components:

LED PrevaLED Core G7 L15 H1

FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16685\_CLAMP-PRV-A








### **OSRAM**

LED Soleriq S13 19x19
FWHM / FWTM Asymmetric

Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

TE Connectivity: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1




## **OSRAM**

#### Opto Semiconducto

LED Soleriq S13 19x19
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

IDEAL: 50-2103CT + 50-2100AN




## PHILIPS


Required components:

LED Fortimo SLM L13 + SLM holder

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TE Connectivity: OPTIC CLIP Z50 TYPE1 2213194-1






# **PHILIPS**

Required components:

LED Fortimo SLM L13 CoB

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

TE Connectivity: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

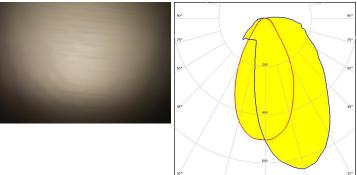




Fortimo SLM L15 + SLM holder

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:

TE Connectivity: OPTIC CLIP Z50 TYPE1 2213194-1

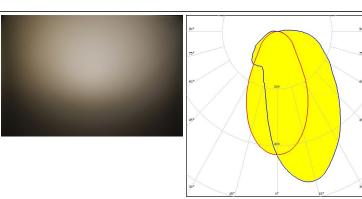


# **SAMSUNG**

LED LC040C FWHM / FWTM Asymmetric

Efficiency 88 % Peak intensity 0.8 cd/lm LEDs/each optic 1 White Light colour

Required components:


TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1

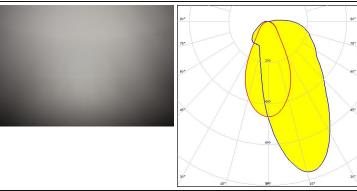



LED AC Zhaga COB FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 0.6 cd/lm LEDs/each optic

Light colour White Required components: Optosource: SEHSMJD-A

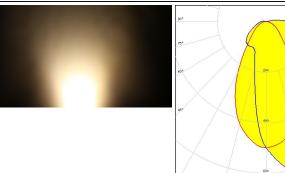




MJT COB LES 14.5 LED

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.5 cd/lm LEDs/each optic White Light colour

Required components:

TE Connectivity: 2213254-2 + OPTIC CLIP Z50 TYPE1 2213194-1

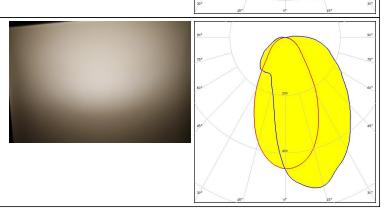






WU-M-484 FWHM / FWTM

Asymmetric 84 % Efficiency

Peak intensity 0.6 cd/lm

LEDs/each optic Light colour White Required components:

TE Connectivity: OPTIC CLIP Z50 TYPE1 2213194-1






### bridgelux

LED V10 Gen6
FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


C14123\_CLAMP-CXA15-18



#### bridgelux

LED V13 Gen7
FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C13658 CLAMP-VERO13-18


C13658\_CLAMP-VERO13-18 Bender Wirth: 477 Typ L1



#### bridgelux

LED V13 Gen7
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

IDEAL: 50-2103CT + 50-2100AN




# **CITIZEN**

Required components:

LED CLL02x/CLU02x (LES10)

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White

C13658\_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1






# **CITIZEN**

CLU700/701/702/703

FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 1.2 cd/lm LEDs/each optic Light colour White

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1




# **CITIZEN**

LED CLU710/711 FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 470 Typ L1




## CREE - LED

LED CXA/B 13xx  $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 87 % Peak intensity 1.2 cd/lm LEDs/each optic 1 Light colour White

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 448 Typ L1




## CREE & LED

CXA/B 15xx FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 441 Typ L1






## CREE - LED

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


C13658\_CLAMP-VERO13-18 Bender Wirth: 437 Typ L1



## CREE & LED

LED CXA/B 1830
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C14123\_CLAMP-CXA15-18



## **MUMILEDS**

LED LUXEON CoB 1202/1203

FWHM / FWTM Asymmetric

Efficiency 85 %


Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1



# **DESCRIPTION** LUMILEDS

LED LUXEON CoB 1202s

FWHM / FWTM Asymmetric

Efficiency 86 %


Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 452 Typ L1






## **WNICHIA**

LED COB L-Type (LES 9)

FWHM / FWTM Asymmetric Efficiency 85 % Peak intensity 1.1 cd/lm LEDs/each optic Light colour White

TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1




## **WNICHIA**

Required components:

LED NSCxL036A FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour

Required components:


TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1



# OSRAM Opto Semiconductors

LED Duris S10 FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components:

C13658\_CLAMP-VERO13-18




#### **OSRAM**

LED Soleriq S13

FWHM / FWTM Asymmetric Efficiency 82 % Peak intensity 0.8 cd/lm LEDs/each optic White Light colour

C14123\_CLAMP-CXA15-18

Required components:






#### OSRAM Opto Semiconductors

LED Soleriq S9
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1




## SHARP

LED Mini Zenigata (GW6BM)

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C13658\_CLAMP-VERO13-18 Bender Wirth: 452 Typ L1





# PRODUCT DATASHEET RONDA-WAS

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

17/17

www.ledil.com/ where\_to\_buy