
Customer Information

DRAWING No.: M80-263FIXX-XX-XX IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

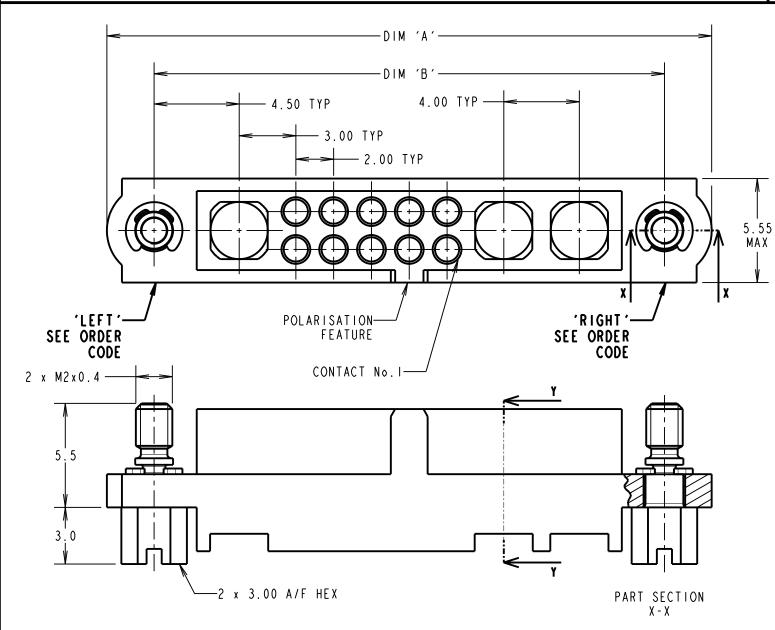

DIMENSION	CALCULATIONS		
DIM 'A'	((4 x No. OF SPECIAL CONTACTS) + No. OF SIGNAL CONTACTS) + 10.0		
DIM 'B'	((4 x No. OF SPECIAL CONTACTS) + No. OF SIGNAL CONTACTS) + 5.0		
	MPLES: CONNECTOR WITH 02 RIGHT (BEFORE No.I) SPECIAL CONTACTS,		


M80-263F102-10-01


DIM 'A' = 32.0mm, DIM 'B' = 27.0mm

CONNECTOR WITH NO SIGNAL CONTACTS, AND 06 SPECIAL CONTACTS,

M80-263F106-00-00

DIM 'A' = 34.0mm, DIM 'B' = 29.0mm

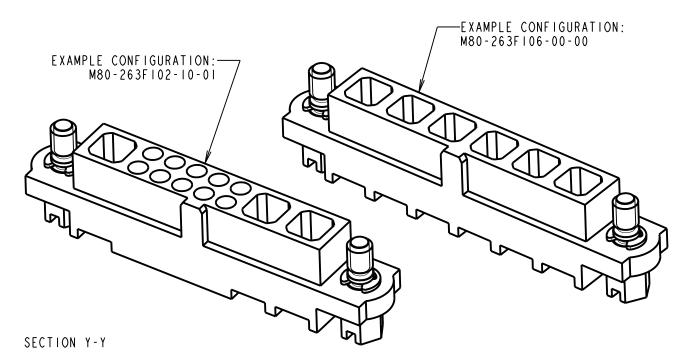




I. CONNECTORS ARE SUPPLIED WITHOUT CONTACTS.

2. SUITABLE FOR FEMALE CABLE POWER, COAXIAL AND SIGNAL DATAMATE CONTACTS - FOR MORE INFORMATION PLEASE VISIT HARWIN.COM.

3. FOR MECHANICAL AND ELECTRICAL SPECIFICATION SEE COMPONENT SPECIFICATION COO5XX (LATEST ISSUE).

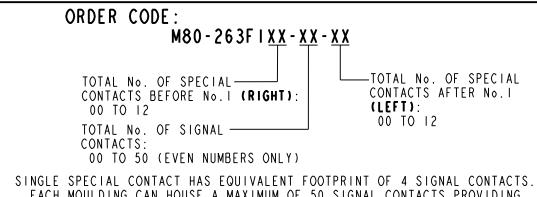

EACH MOULDING CAN HOUSE A MAXIMUM OF 50 SIGNAL CONTACTS PROVIDING THERE ARE NO SPECIAL CONTACTS, OR 12 SPECIAL CONTACTS PROVIDING THERE ARE NO SIGNAL CONTACTS, AND ALL CONFIGURATIONS BETWEEN.

IF THERE ARE NO SIGNAL CONTACTS, USE ONLY THE FIRST SPECIAL CONTACT QTY I.E. M80-263FIXX-00-00

S/AREA:

RA	2	24.08.20	30137	
NAME	ISS.	DATE	CN/CO	
APPROVED: R.ALEXANDER				
CHEC	KED:	S.BFNNF	TT	

OF,

DRAWN: R. PORTLOCK

CUSTOMER REF.:

ASSEMBLY DRG:



THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES X. = ±1mm X.X = ±0.50mm $X.XX = \pm 0.20$ mm $X.XXX = \pm 0.01$ mm ANGLES = ±5°

UNLESS STATED

MATERIAL: SEE ABOVE FINISH: SEE ABOVE

JACKSCREW DATAMATE

MIXED TECHNOLOGY FEMALE CRIMP MOULDING WITH HARDWARE

DRAWING NUMBER:

M80-263FIXX-XX-XX

www.harwin.com technical@harwin.com