# 74ABT162245A; 74ABTH162245A

16-bit bus transceiver with 30  $\Omega$  series termination resistors; 3-state

Rev. 5 — 2 July 2021

**Product data sheet** 

### 1. General description

The 74ABT162245A; 74ABTH162245A is a 16-bit transceiver with 30  $\Omega$  termination resistors and 3-state outputs. The device can be used as two 8-bit transceivers or one 16-bit transceiver. The device features two output enables ( $1\overline{OE}$  and  $2\overline{OE}$ ) each controlling eight outputs, and two send/receive (1DIR and 2DIR) inputs for direction control. A HIGH on  $n\overline{OE}$  causes the outputs to assume a high-impedance OFF-state. This device is fully specified for partial power down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the potentially damaging backflow current through the device when it is powered down.

Two options are available, 74ABT162245A which does not have the bus hold feature and the 74ABTH162245A which incorporates the bus hold feature.

### 2. Features and benefits

- 16-bit bidirectional bus interface
- Multiple V<sub>CC</sub> and GND pins minimize switching noise
- 3-state buffers
- Output capability: +12 mA/–32 mA
- 74ABTH162245A incorporates bus-hold data inputs which eliminate the need for external pull-up resistors to hold unused inputs
- Integrated 30 Ω termination resistors
- Supply voltage range from 4.5 to 5.5 V
- · BiCMOS high speed and output drive
- Direct interface with TTL levels
- Power-up 3-state
- I<sub>OFF</sub> circuitry provides partial Power-down mode operation
- Latch-up performance exceeds 500 mA per JESD 78 Class II Level B
- ESD protection:
  - HBM JESD-A114E exceeds 2000 V
  - CDM JESD22-C101C exceeds 1000 V
- Specified from -40 °C to +85 °C


# 3. Ordering information


#### **Table 1. Ordering information**

| Type number      | Package           |         |  |          |  |  |  |  |  |
|------------------|-------------------|---------|--|----------|--|--|--|--|--|
|                  | Temperature range | Name    | Description                                | Version  |  |  |  |  |  |
| 74ABT162245ADGG  | -40 °C to +85 °C  | TSSOP48 | plastic thin shrink small outline package; | SOT362-1 |  |  |  |  |  |
| 74ABTH162245ADGG |                   |         | 48 leads; body width 6.1 mm                |          |  |  |  |  |  |



# 4. Functional diagram

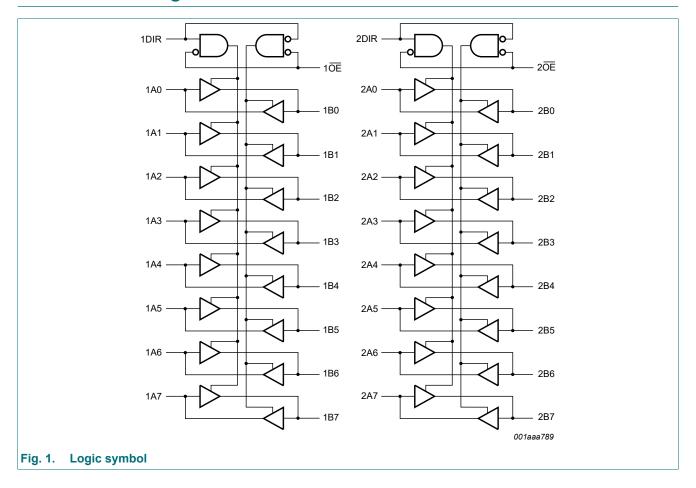


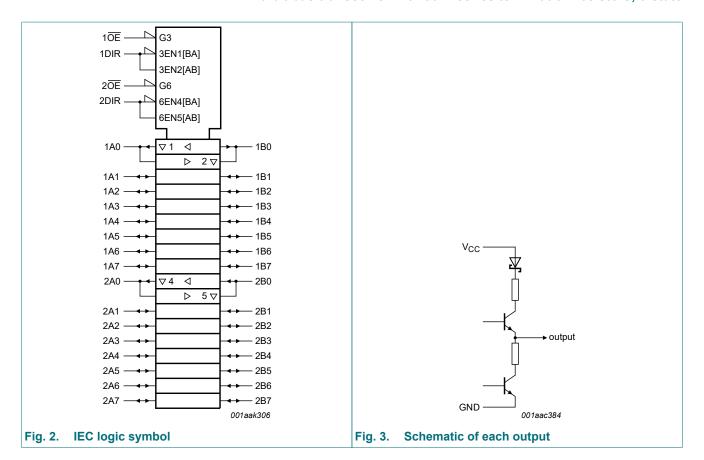

**Product data sheet** 

# 5. Pinning information

### 5.1. Pinning

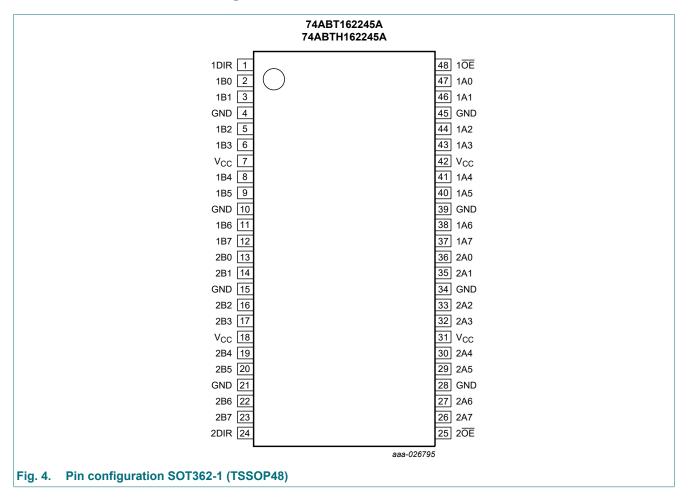

### 5.2. Pin description

#### Table 2. Pin description

| Symbol                                 | Pin                            | Description             |
|--|--------------------------------|-------------------------|
| 1DIR, 2DIR                             | 1, 24                          | direction control input |
| 1A0, 1A1, 1A2, 1A3, 1A4, 1A5, 1A6, 1A7 | 47, 46, 44, 43, 41, 40, 38, 37 | data input/output       |
| 2A0, 2A1, 2A2, 2A3, 2A4, 2A5, 2A6, 2A7 | 36, 35, 33, 32, 30, 29, 27, 26 | data input/output       |
| GND                                    | 4, 10, 15, 21, 28, 34, 39, 45  | ground (0 V)            |
| 1B0, 1B1, 1B2, 1B3, 1B4, 1B5, 1B6, 1B7 | 2, 3, 5, 6, 8, 9, 11, 12       | data input/output       |
| 2B0, 2B1, 2B2, 2B3, 2B4, 2B5, 2B6, 2B7 | 13, 14, 16, 17, 19, 20, 22, 23 | data input/output       |
| 1 <del>OE</del> , 2 <del>OE</del>      | 48, 25                         | output enable input     |
| V <sub>CC</sub>                        | 7, 18, 31, 42                  | supply voltage          |

# 6. Functional description

#### Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

| Control                |   | Input/output     |                  |  |
|------------------------|---|------------------|------------------|--|
| n <del>OE</del> nDIR r |   | nAn              | nBn              |  |
| L                      | L | output nAn = nBn | input            |  |
| L                      | Н | input            | output nBn = nAn |  |
| Н                      | X | Z                | Z                |  |

# 7. Limiting values

#### **Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol           | Parameter               | Conditions                        |     | Min  | Max  | Unit |
|------------------|-------------------------|-----------------------------------|-----|------|------|------|
| V <sub>CC</sub>  | supply voltage          |                                   |     | -0.5 | +7.0 | V    |
| VI               | input voltage           |                                   | [1] | -1.2 | +7.0 | V    |
| Vo               | output voltage          | output in OFF-state or HIGH-state | [1] | -0.5 | +5.5 | V    |
| I <sub>IK</sub>  | input clamping current  | V <sub>I</sub> < 0 V              |     | -18  | -    | mA   |
| I <sub>OK</sub>  | output clamping current | V <sub>O</sub> < 0 V              |     | -50  | -    | mA   |
| Io               | output current          | output in LOW-state               |     | -    | 128  | mA   |
|                  |                         | output in HIGH-state              |     | -64  | -    | mA   |
| Tj               | junction temperature    |                                   | [2] | -    | 150  | °C   |
| T <sub>stg</sub> | storage temperature     |                                   |     | -65  | +150 | °C   |

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

# 8. Recommended operating conditions

#### **Table 5. Operating conditions**

Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                           | Conditions  | Min | Тур | Max             | Unit |
|------------------|-------------------------------------|-------------|-----|-----|-----------------|------|
| V <sub>CC</sub>  | supply voltage                      |             | 4.5 | -   | 5.5             | V    |
| VI               | input voltage                       |             | 0   | -   | V <sub>CC</sub> | V    |
| I <sub>OH</sub>  | HIGH-level output current           |             | -32 | -   | -               | mA   |
| I <sub>OL</sub>  | LOW-level output current            |             | -   | -   | 12              | mA   |
| Δt/ΔV            | input transition rise and fall rate |             | 0   | -   | 10              | ns/V |
| T <sub>amb</sub> | ambient temperature                 | in free air | -40 | -   | +85             | °C   |

<sup>[2]</sup> The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.

# 9. Static characteristics

#### **Table 6. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                | Parameter                             | Conditions  |   |      | 25 °C |      | -40 °C t | o +85 °C | Unit |
|-----------------------|---------------------------------------|---|---|------|-------|------|----------|----------|------|
|                       |                                       |   | Min   | Тур  | Max   | Min  | Max      | 1        |      |
| V <sub>IK</sub>       | input clamping voltage                | V <sub>CC</sub> = 4.5 V; I <sub>IK</sub> = -18 mA   | V <sub>CC</sub> = 4.5 V; I <sub>IK</sub> = -18 mA |      | -0.9  | -    | -1.2     | -        | V    |
| V <sub>IH</sub>       | HIGH-level input voltage              |   | 2.0   | -    | -     | 2.0  | -        | V        |      |
| V <sub>IL</sub>       | LOW-level input voltage               |   |   | -    | -     | 0.8  | -        | 0.8      | V    |
| V <sub>OH</sub>       | HIGH-level output voltage             | $V_{CC}$ = 4.5 V; $I_{OH}$ = -3 mA;<br>$V_I$ = $V_{IL}$ or $V_{IH}$                                       |   | 2.5  | 2.9   | -    | 2.5      | -        | V    |
|                       |                                       | $V_{CC}$ = 5.0 V; $I_{OH}$ = -3 mA;<br>$V_I$ = $V_{IL}$ or $V_{IH}$                                       |   | 3.0  | 3.4   | -    | 3.0      | -        | V    |
|                       |                                       | V <sub>CC</sub> = 4.5 V; I <sub>OH</sub> = -32 mA;<br>V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub> |   | 2.0  | 2.4   | -    | 2.0      | -        | V    |
| V <sub>OL</sub>       | LOW-level output voltage              | $V_{CC}$ = 4.5 V; $I_{OL}$ = 8 mA; $V_I$ = $V_{IL}$ or $V_{IH}$   |   | -    | 0.46  | 0.65 | -        | 0.65     | V    |
|                       |                                       | V <sub>CC</sub> = 4.5 V; I <sub>OL</sub> = 12 mA;<br>V <sub>I</sub> = V <sub>IL</sub> or V <sub>IH</sub>  |   | -    | 0.5   | 0.8  | -        | 0.8      | V    |
| l <sub>l</sub>        | input leakage current                 | $\overline{OE}$ , nDIR; $V_{CC}$ = 5.5 V; $V_I$ = GND or 5.5 V  |   | -    | ±0.01 | ±1   | -        | ±1       | μA   |
| I <sub>OFF</sub>      | power-off leakage<br>current          | $V_{CC} = 0 \text{ V}; V_{I} \text{ or } V_{O} \le 4.5 \text{ V}$   |   | -    | ±5.0  | ±100 | -        | ±100     | μA   |
| I <sub>BHL</sub>      | bus hold LOW current                  | V <sub>CC</sub> = 4.5 V; V <sub>I</sub> = 0.8 V   | [1]   | 50   | -     | -    | 50       | -        | μΑ   |
| I <sub>BHH</sub>      | bus hold HIGH current                 | V <sub>CC</sub> = 5.5 V; V <sub>I</sub> = 2.0 V   | [1]   | -75  | -     | -    | -75      | -        | μΑ   |
| I <sub>BHLO</sub>     | bus hold LOW overdrive current        | $V_{CC} = 5.5 \text{ V}; V_I = 0 \text{ V to } 5.5 \text{ V}$   | [1] [2]   | 500  | -     | -    | -        | -        | μA   |
| I <sub>внно</sub>     | bus hold HIGH overdrive current       | $V_{CC} = 5.5 \text{ V}; V_I = 0 \text{ V to } 5.5 \text{ V}$   | [1] [2]   | -500 | -     | -    | -        | -        | μA   |
| I <sub>O(pu/pd)</sub> | power-up/power-down<br>output current | $V_{CC}$ = 2.0 V; $V_{O}$ = 0.5 V;<br>$V_{I}$ = GND or $V_{CC}$ ;<br>$n\overline{OE}$ = don't care        | [3]   | -    | ±5.0  | ±50  | -        | ±50      | μA   |
| l <sub>OZ</sub>       | OFF-state output                      | $V_{CC}$ = 5.5 V; $V_I$ = $V_{IL}$ or $V_{IH}$  |   |      |       |      |          |          |      |
|                       | current                               | V <sub>O</sub> = 5.5 V  |   | -    | 0.5   | 10   | -        | 10       | μΑ   |
|                       |                                       | V <sub>O</sub> = 0.0 V  |   | -    | -0.5  | -10  | -        | -10      | μΑ   |
| I <sub>CEX</sub>      | output high leakage current           | $V_{CC} = 5.5 \text{ V}; V_{O} = 5.5 \text{ V};$<br>$V_{I} = \text{GND or } V_{CC}$                       |   | -    | 5.0   | 50   | -        | 50       | μA   |
| I <sub>O</sub>        | output current                        | V <sub>CC</sub> = 5.5 V; V <sub>O</sub> = 2.5 V   | [4]   | -50  | -92   | -180 | -50      | -180     | mA   |
| I <sub>CC</sub>       | supply current                        | $V_{CC}$ = 5.5 V; $V_I$ = GND or $V_{CC}$   |   |      |       |      |          |          |      |
|                       |                                       | outputs HIGH  |   | -    | 0.3   | 0.7  | -        | 0.7      | mA   |
|                       |                                       | outputs LOW   |   | -    | 10    | 19   | -        | 19       | mA   |
|                       |                                       | outputs 3-state   |   | -    | 0.3   | 0.7  | -        | 0.7      | mA   |

| Symbol               | Parameter                   | Conditions  |     | 25 °C |     | -40 °C t | o +85 °C | Unit |
|----------------------|-----------------------------|---|-----|-------|-----|----------|----------|------|
|                      |                             |   | Min | Тур   | Max | Min      | Max      |      |
| current one input at |                             | per input pin; $V_{CC} = 5.5 \text{ V}$ ; [5] one input at 3.4 V, other inputs at $V_{CC}$ or GND |     |       |     |          |          |      |
|                      |                             | outputs enabled   | -   | 400   | 700 | -        | 700      | μΑ   |
|                      |                             | 74ABT162245A;<br>outputs 3-state  | -   | 1.0   | 50  | -        | 50       | μΑ   |
|                      |                             | 74ABTH162245A;<br>outputs 3-state   | -   | 100   | 250 | -        | 250      | μΑ   |
|                      |                             | nŌE, nDIR   | -   | 400   | 700 | -        | 700      | μΑ   |
| Cı                   | input capacitance           | V <sub>I</sub> = 0 V or V <sub>CC</sub>   | -   | 3     | -   | -        | -        | pF   |
| C <sub>I/O</sub>     | input/output<br>capacitance | $V_O = 0 \text{ V or } V_{CC}$ ; outputs 3-state  | -   | 7     | -   | -        | -        | pF   |

- [1] Valid for data inputs of bus hold parts only (74ABTH162245A)
- [2] This is the bus hold overdrive current required to force the input to the opposite logic state.
- [3] This parameter is valid for any  $V_{CC}$  between 0 V and 2.1 V with a transition time of up to 10 ms. From  $V_{CC}$  = 2.1 V to  $V_{CC}$  = 4.5 V to 5.5 V a transition time of 100  $\mu$ s is permitted.
- [4] Not more than one output should be tested at a time and the duration of the test should not exceed one second
- [5] This is the increase in supply current for each input at 3.4 V.

# 10. Dynamic characteristics

#### Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 7.

| Symbol           | Parameter                           | Conditions                              | T <sub>amb</sub> = 25 °C;<br>V <sub>CC</sub> = 5.0 V |     |     |     |     |    | ; Unit |
|------------------|-------------------------------------|---|--|-----|-----|-----|-----|----|--------|
|                  |                                     |   | Min  | Тур | Max | Min | Max |    |        |
| t <sub>PLH</sub> | LOW to HIGH propagation delay       | nAn to nBn or nBn to nAn;<br>see Fig. 5 | 1.0  | 2.0 | 3.3 | 1.0 | 3.5 | ns |        |
| t <sub>PHL</sub> | HIGH to LOW propagation delay       | nAn to nBn or nBn to nAn;<br>see Fig. 5 | 1.5  | 3.0 | 4.5 | 1.5 | 4.9 | ns |        |
| t <sub>PZH</sub> | OFF-state to HIGH propagation delay | nOE to nAn or nBn; see Fig. 6           | 1.5  | 3.1 | 4.3 | 1.5 | 5.0 | ns |        |
| t <sub>PZL</sub> | OFF-state to LOW propagation delay  | nOE to nAn or nBn; see Fig. 6           | 2.0  | 5.0 | 6.1 | 2.0 | 7.0 | ns |        |
| t <sub>PHZ</sub> | HIGH to OFF-state propagation delay | nOE to nAn or nBn; see Fig. 6           | 1.7  | 3.5 | 4.8 | 1.7 | 5.4 | ns |        |
| t <sub>PLZ</sub> | LOW to OFF-state propagation delay  | nOE to nAn or nBn; see Fig. 6           | 1.5  | 3.2 | 4.5 | 1.5 | 4.9 | ns |        |

### 10.1. Waveforms and test circuit



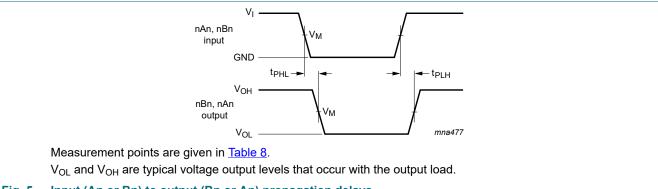



Fig. 5. Input (An or Bn) to output (Bn or An) propagation delays



**Table 8. Measurement points** 

| Input          |                | Output         |                         |                         |  |
|----------------|----------------|----------------|-------------------------|-------------------------|--|
| V <sub>I</sub> | V <sub>M</sub> | V <sub>M</sub> | V <sub>X</sub>          | V <sub>Y</sub>          |  |
| 3.0 V          | 1.5 V          | 1.5 V          | V <sub>OL</sub> + 0.3 V | V <sub>OH</sub> - 0.3 V |  |

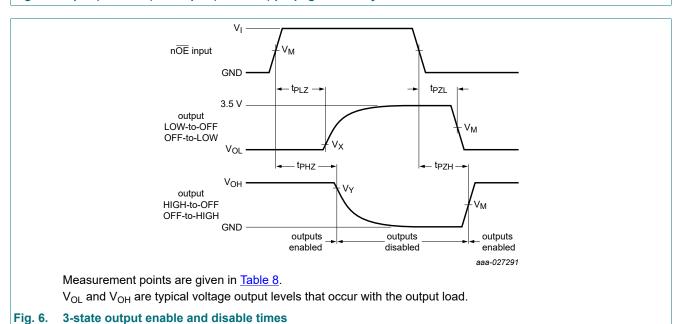



Test data is given in Table 9.

Definitions test circuit:

 $R_L$  = Load resistance.

 $C_L$  = Load capacitance including jig and probe capacitance.

 $R_T$  = Termination resistance should be equal to output impedance  $Z_0$  of the pulse generator.

 $V_{EXT}$  = Test voltage for switching times.

### Fig. 7. Test circuit for measuring switching times

Table 9. Test data

| Input |         |                | Load V <sub>EXT</sub>           |       |       |                                     |                                     |                                     |
|-------|---------|----------------|---------------------------------|-------|-------|-------------------------------------|-------------------------------------|-------------------------------------|
| VI    | fi      | t <sub>W</sub> | t <sub>r</sub> , t <sub>f</sub> | CL    | $R_L$ | t <sub>PHZ</sub> , t <sub>PZH</sub> | t <sub>PLZ</sub> , t <sub>PZL</sub> | t <sub>PLH</sub> , t <sub>PHL</sub> |
| 3.0 V | ≤ 1 MHz | 500 ns         | ≤ 2.5 ns                        | 50 pF | 500 Ω | open                                | 7 V                                 | open                                |

# 11. Package outline

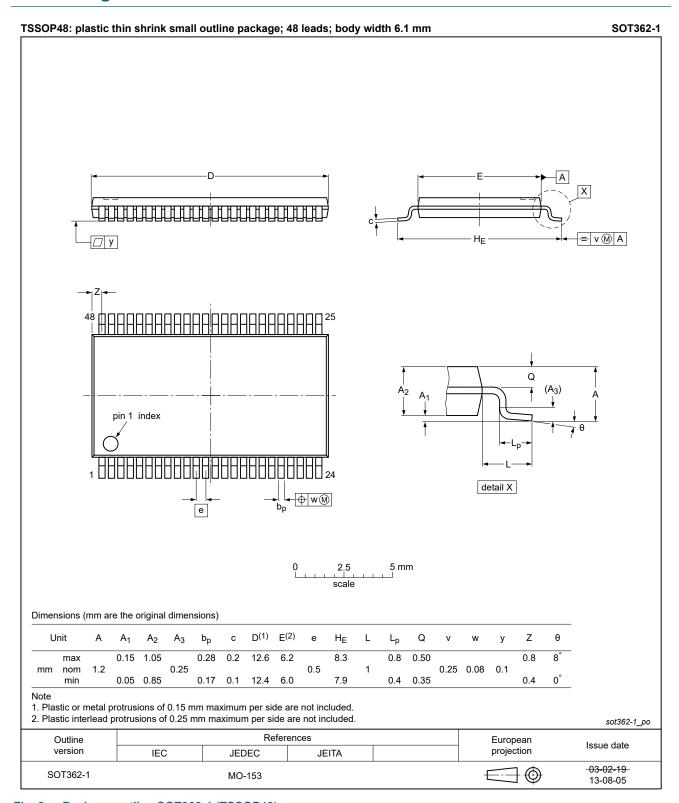


Fig. 8. Package outline SOT362-1 (TSSOP48)

# 12. Abbreviations

#### **Table 10. Abbreviations**

| Acronym | Description                                  |  |  |
|---------|--|--|--|
| BiCMOS  | olar Complementary Metal Oxide Semiconductor |  |  |
| CDM     | Charged Device Model                         |  |  |
| DUT     | Device Under Test                            |  |  |
| ESD     | ElectroStatic Discharge                      |  |  |
| НВМ     | Human Body Model                             |  |  |

# 13. Revision history

### **Table 11. Revision history**

| Document ID           | Release date | Data sheet status   | Change notice   | Supersedes         |  |  |  |
|-----------------------|--------------|---|-----------------|--------------------|--|--|--|
| 74ABT_ABTH162245A v.5 | 20210702     | Product data sheet  | -               | 74ABT_H162245A v.4 |  |  |  |
| Modifications:        | , ,,         | Type number 74ABT162245ADL (SOT370-1 / SSOP48) removed.  Section 1 and Section 2 updated.   |                 |                    |  |  |  |
| 74ABT_H162245A v.4    | 20190220     | Product data sheet  | -               | 74ABT_H162245A v.3 |  |  |  |
| Modifications:        | Type number  | er 74ABTH162245ADL (SC  | T370-1) removed |                    |  |  |  |
| 74ABT_H162245A v.3    | 20170831     | Product data sheet  | -               | 74ABT_H162245A v.2 |  |  |  |
| Modifications:        | guidelines o | The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.  Legal texts have been adapted to the new company name where appropriate. |                 |                    |  |  |  |
| 74ABT_H162245A v.2    | 19980225     | Product specification   | -               | 74ABT_H162245A v.1 |  |  |  |
| 74ABT_H162245A v.1    | 19961120     | Product specification   | -               | -                  |  |  |  |

### 14. Legal information

#### **Data sheet status**

| Document status [1][2]         | Product<br>status [3] | Definition  |
|--------------------------------|-----------------------|---|
| Objective [short] data sheet   | Development           | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification         | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production            | This document contains the product specification.                                     |

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by sustained.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# **Contents**

| 1. General description               | 1          |
|--------------------------------------|------------|
| 2. Features and benefits             | 1          |
| 3. Ordering information              | 1          |
| 4. Functional diagram                | 2          |
| 5. Pinning information               | 2          |
| 5.1. Pinning                         |            |
| 5.2. Pin description                 | 2          |
| 6. Functional description            | 5          |
| 7. Limiting values                   | 5          |
| 8. Recommended operating conditions. |            |
| 9. Static characteristics            |            |
| 10. Dynamic characteristics          | 7          |
| 10.1. Waveforms and test circuit     | 8          |
| 11. Package outline                  | 10         |
| 12. Abbreviations                    | <b>1</b> 1 |
| 13. Revision history                 | 11         |
| 14. Legal information                |            |
| -                                    |            |

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 2 July 2021

<sup>©</sup> Nexperia B.V. 2021. All rights reserved