



Multilayer Band Pass Filter (Balance Output Type)
For 2400-2500MHz

DEA162450BT-7219A1

1.6x0.8mm [EIA 0603]*

* Dimensions Code JIS[EIA]




Multilayer Band Pass Filter (Balance Output Type) For 2400-2500MHz


Conformity to RoHS Directive

DEA162450BT-7219A1

SHAPES AND DIMENSIONS








Те	rminal functions
1	Unbalanced port
2	GND
2 3 4	Balanced port1
	Balanced port2
5	GND
6	GND

Dimensions in mm

■ RECOMMENDED LAND PATTERN



Dimensions in mm

OROHS Directive Compliant Product: See the following for more details.https://product.tdk.com/info/en/environment/rohs/index.html

[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA162450BT-7219A1

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Unbalanced Port Characteristic Impedance (Ω)			50 (Nominal)	
Balanced Port Characteristic Impedance (Ω)		Matched to TICC253x series		
Balanced Port Characteristic Impedance (12)			40+j26	
Insertion Loss (dB)	2400 to 2500	_	1.36	1.75
Attanuation (dP)	4800 to 5000	20	26	_
Attenuation (dB)	7200 to 7500	20	35	_
Return Loss at Unbalanced Port (dB)	2400 to 2500	10	22	_
Phase Balance (deg.)	2400 to 2500	165	175	195
Amplitude Balance (dB)	2400 to 2500	-2	-0.9	2

[·] Ta: +25±5°C

TEMPERATURE RANGE

Operating temperature	Storage temperature	
(°C)	(°C)	
-40 to +85	-40 to +85	


All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.




DEA162450BT-7219A1

■ FREQUENCY CHARACTERISTICS


□SDS21 INSETION LOSS

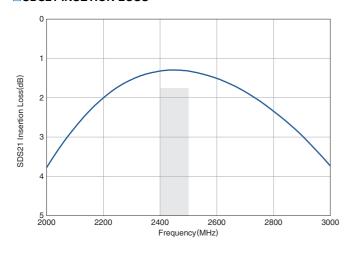


□SDS21 ATTENUATION




□SSS11 RETURN LOSS at UNBALANCE PORT

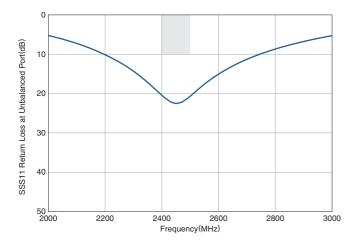


□SDD22 RETURN LOSS at BALANCE PORT



□AMPLITUDE BALANCE



□PHASE BALANCE




[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.



DEA162450BT-7219A1

■ RECOMMENDED REFLOW PROFILE

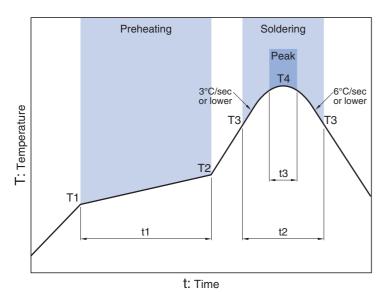

Preheating			Soldering Critical zone (T3 to T4) Peak			
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120sec	240 to 260°C	30sec max.

 $^{^{\}ast}\,\text{t3}$: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

[•] Before using these products, be sure to request the delivery specifications.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.