


Piano DIP Switch

A6SR

Standard Surface Mounting Piano DIP Switches

- Low-profile design with a height of only 5 mm and a 2.54-mm pitch for continuous mounting.
- Gold-plated twin contacts ensure high reliability.
- Embossed 100 pcs reel type is recommended for flexible demand.

RoHS Compliant

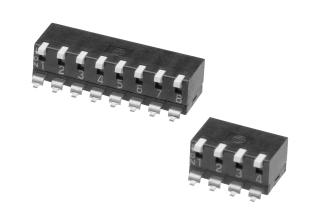

■List of Models

	Type Short actuator Long actuator		Short actuator		Long actuator		
		धारम् धारम् धारम् धारम्	S G G G G G G G G G G G G G G G G G G G	± € €	of con-	्र सन्तर्	The state of the s
				Embossed taping			
No. of poles	Quantity per tube	Tube packaging		Standard (700 pcs)	100 pcs reel (100 pcs)	Standard (700 pcs)	100 pcs reel (100 pcs)
2	95	A6SR-2101	A6SR-2104	A6SR-2101-P	A6SR-2101-R100	A6SR-2104-P	A6SR-2104-R100
4	47	A6SR-4101	A6SR-4104	A6SR-4101-P	A6SR-4101-R100	A6SR-4104-P	A6SR-4104-R100
6	31	A6SR-6101	A6SR-6104	A6SR-6101-P	A6SR-6101-R100	A6SR-6104-P	A6SR-6104-R100
8	23	A6SR-8101	A6SR-8104	A6SR-8101-P	A6SR-8101-R100	A6SR-8104-P	A6SR-8104-R100
10	18	A6SR-0101	A6SR-0104	A6SR-0101-P	A6SR-0101-R100	A6SR-0104-P	A6SR-0104-R100


Note: Orders must be made in integral multiples of the quantities given for each tube. Switches are not sold individually.

■Ratings/Characteristics

Rating (resistive load)		25 mA at 24 VDC 10 µA (minimum current) at 3.5 VDC		
Ambient operating temp	perature	-20 to +70°C at 60% max. (with no icing or condensation)		
Ambient operating humidity		35% to 95% (at +5 to +35°C)		
Insulation resistance		100 M Ω min. (at 250 VDC with insulation tester)		
Contact resistance (init	esistance (initial value) 200 m Ω max.			
Dielectric strength	Between terminals	500 VAC for 1 min		
Vibration resistance	Malfunction	10 to 55 Hz, 1.5-mm double amplitude		
Shock resistance	Malfunction	300 m/s ² min.		
Durability	Electrical	1,000 operations min.		
Washing		Not possible		
Degree of protection		IEC IP40		
Operating force		0.29 to 7.8 N {30 to 795 gf}		
Weight		0.24 g (2 poles), 0.48 g (4 poles), 0.73 g (6 poles), 0.97 g (8 poles), 1.22 g (10 poles)		

■Dimensions (Unit: mm)

Short actuator / Long actuator

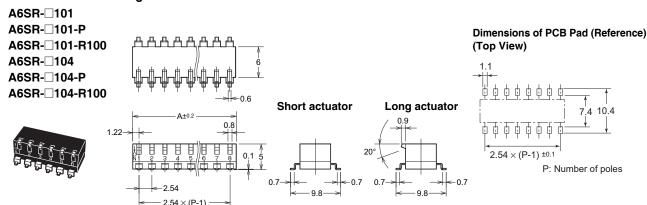

No. of poles	Мо	Dimension A		
No. or poles	Short actuator Long actuator		Dilliension A	
2	A6SR-2101	A6SR-2104	4.98	
4	A6SR-4101	A6SR-4104	10.06	
6	A6SR-6101	A6SR-6104	15.14	
8	A6SR-8101	A6SR-8104	20.22	
10	A6SR-0101	A6SR-0104	25.30	

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

P : Pole numbers

■Internal Connections

Contact Form (Top View)



■Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

Contact: www.omron.com/ecb

Note: Do not use this document to operate the Unit.

Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms