Technical Data Sheet



SP4T Ramses SMA 18GHz Latching Self-cut-off Auto-reset Indicators 28Vdc TTL Diodes D-sub connector

PAGE 1/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573493425

RF CHARACTERISTICS

Number of ways : 4

Frequency range : 0 - 18 GHz Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 18
VSWR max	1.20	1.30	1.40	1.50
Insertion loss max	0.20 dB	0.30 dB	0.40 dB	0.50 dB
Isolation min	80 dB	70 dB	60 dB	60 dB
Average power (*)	240 W	150 W	120 W	100 W

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 250 mA

Actuator voltage (Vcc) : 28V (24 to 30V)

Terminals : 25 pins D-SUB male connector

TTL inputs (E) - High level : 2.2 to 5.5 V / 800μA at 5.5 V

- Low level : 0 to 0.8 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012
Life : 5 million cycles per position

Switching Time*** : < 40 msConstruction : Splashproof
Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage; 25° C)









SP4T Ramses SMA 18GHz Latching Self-cut-off Auto-reset Indicators 28Vdc TTL Diodes D-sub connector


PAGE 2/2 ISSUE 22-03-22 SERIE : SPnT PART NUMBER : R573493425

DRAWING




TTL input	RF Continuity	Ind.
E1 = 1	$IN \leftrightarrow 1$	D.E
E2 = 1	$IN \leftrightarrow 2$	D.F
E3 = 1	$IN \leftrightarrow 3$	D.G
E4 = 1	$IN \leftrightarrow 4$	D.H







SCHEMATIC DIAGRAM

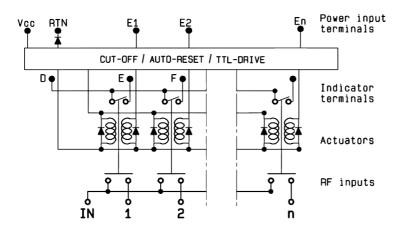

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.