

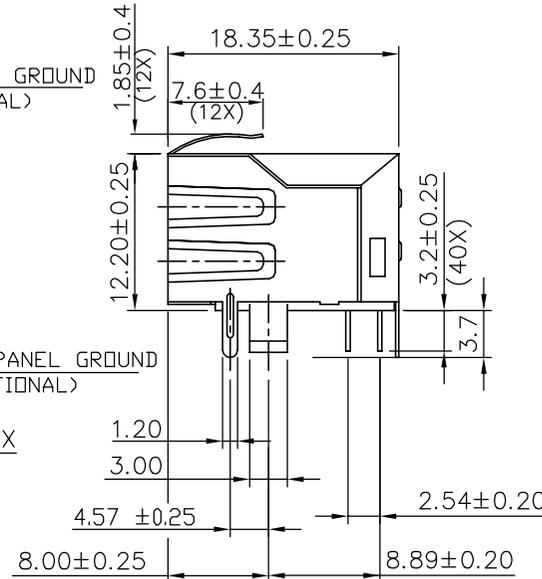
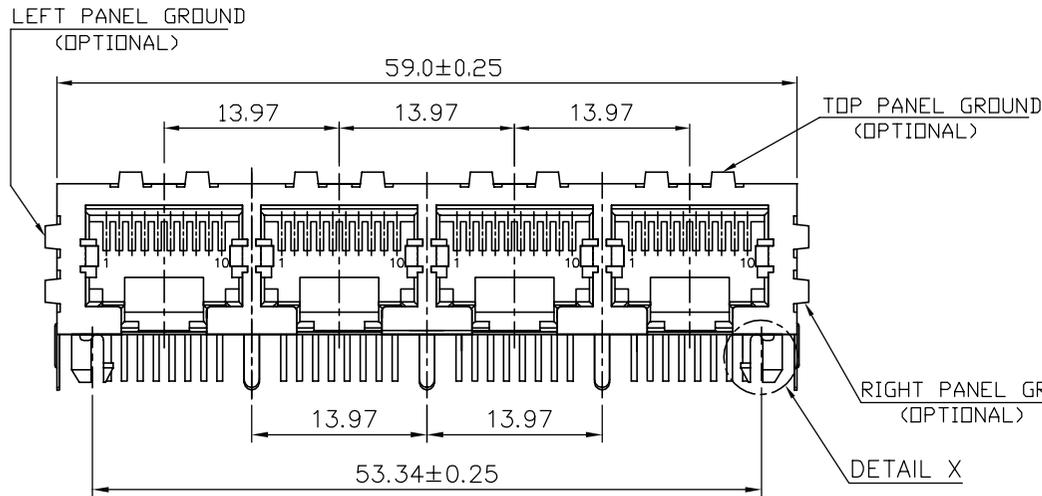




DETAIL X

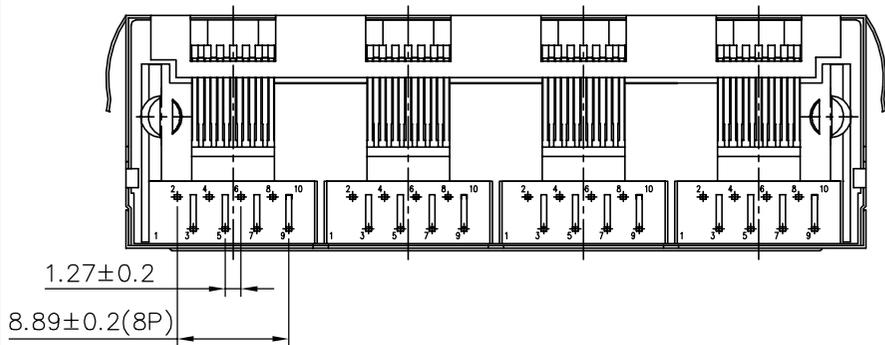

PRINT P/N & DATE CODE (SEE NOTE 4)

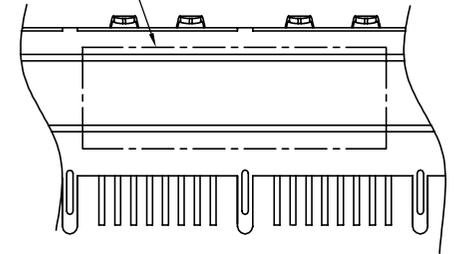

mat'l. code		surface ASME Y14.5		tolerance ASME Y14.5		projection		product family GANGED MJACK	
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		title CAT 3 MULTI-PORTS TAB DOWN 1x4 WITH SHIELD, W/O LED	
A	-	WL	11/04/11	angles	X.X±0.25	MM		dwg no 10118065	
B	ECN-ELX-N-008500	A.ZH	12/05/11	line	X.XX±0.13	scale		sheet 1 of 4 size A4	
C	ECN-ELX-N-009381	A.ZH	01/06/12	X*±1*	X.XXX±0.05	FCI		type CUSTOMER Drawing	
sheet index		revision sheet		C		1~4			

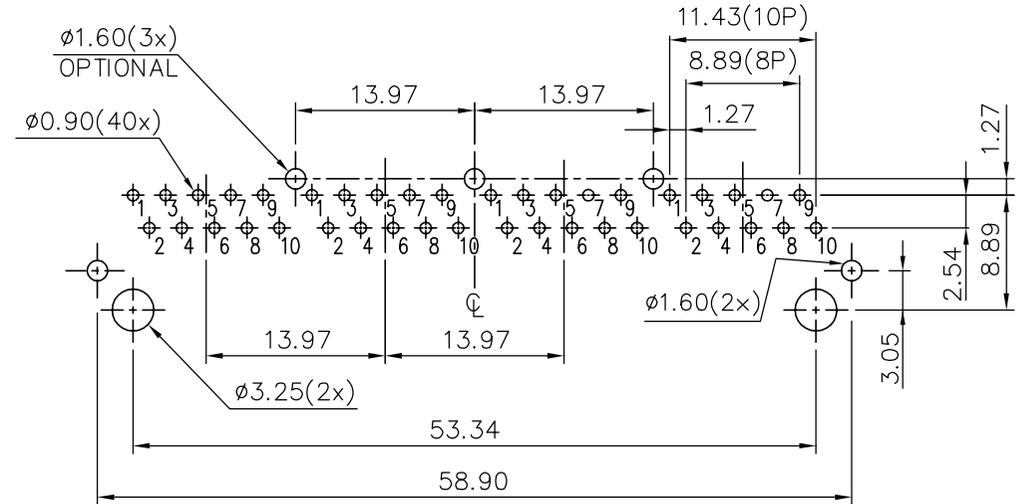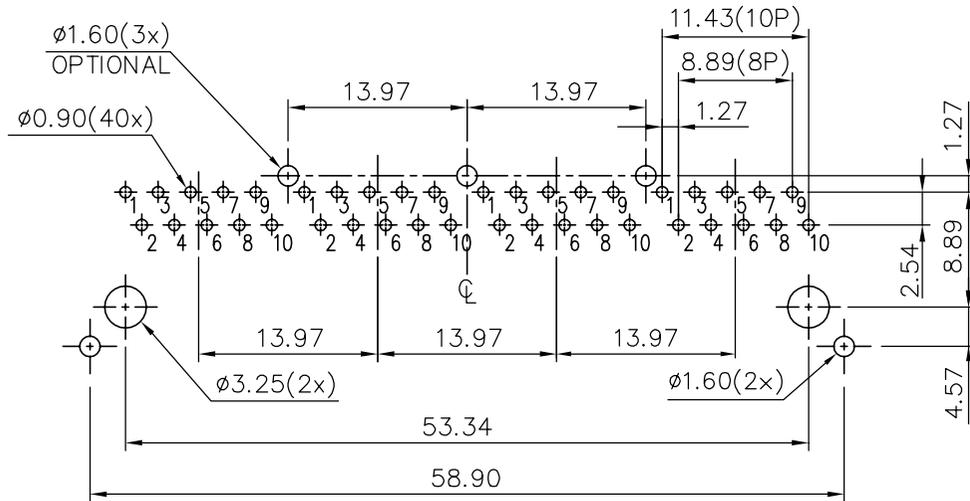


RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

RECOMMENDED PCB LAYOUT


RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

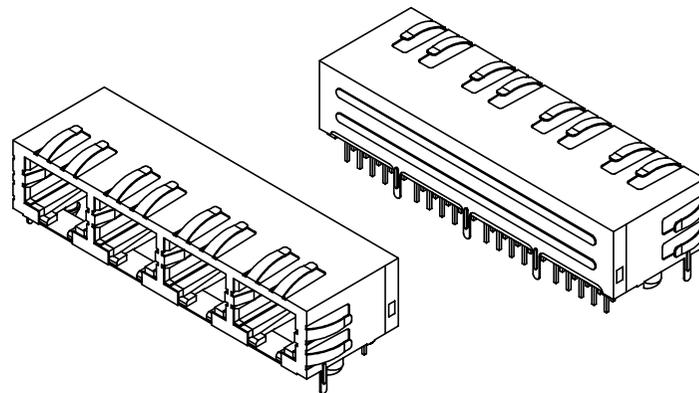


mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family GANGED MJACK
ltr	ecn no	dr	date	tolerances unless otherwise specified	title CAT 3 MULTI-PORTS TAB DOWN 1x4 WITH SHIELD, W/O LED
C				angles X.X \pm 0.25 X.XX \pm 0.13 X* \pm 1*	
				scale MM	dwg no 10118065 sheet 3 of 4 size A4
		dr	WENDY CHEN 05/03/11		
		enr	WENDY CHEN 05/03/11		
		chr	WENDY CHEN 05/03/11		
		appd	GARY HSIEH 05/03/11		
sheet index	revision sheet				

NOTE:

1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0
COLOR: BLACK.
CONTACTS: COPPER ALLOY.
SHIELD: COPPER ALLOY.
2. FINISH:
CONTACTS: 50u" MIN. NICKEL UNDER PLATED OVER ALL.
SELECTIVE GOLD PLATED ON CONTACT AREA,
1u" GOLD PLATED ON SOLDER TAIL.
SHIELD: 20u" MIN. NICKEL OVER ALL.
3. LASER MARK FCI LOGO ON THE TOP OF SHIELD.
4. "DATE CODE" DESCRIPTION:
XX XX
WEEK
YEAR (EX. : 10--2010)
5. PRODUCT PERFORMANCE PER SPEC. : GS-12-0990.
6. PACKING SPEC. : GS-14-2170.
7. THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBED IN GS-22-008.
8. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.
9. FOR "10P 8C" P/N: EACH PORT HAS 8Pin, TOTAL HAS 32 Pin FOR FOUR PORTS.

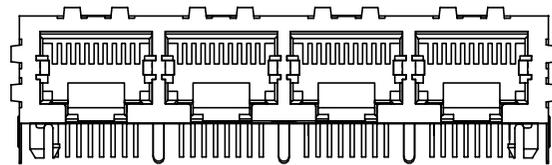


10118065-XXXX3XXLF
WITH 3 BACK SHIELD TABS

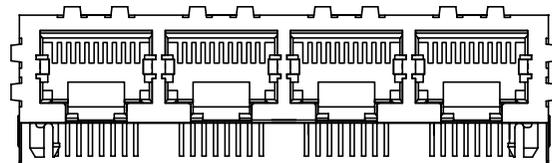

10118065-XXXXOXXLF
WITHOUT BACK SHIELD TAB

10. PART NUMBER DESCRIPTION:

- 10118065-X X X X X X X LF
- LEAD FREE
 - 0 : 10P 8C (SEE NOTE 9)
 - PACKAGING
 - 1 : TRAY
 - OPTIONAL BACK SHIELD TAB
 - 0 : WITHOUT BACK SHIELD TAB
 - 3 : WITH 3 BACK SHIELD TABS
 - OPTIONAL RIGHT / LEFT SHIELD TAB
 - 1 : DIM.A=4.57
 - 5 : DIM.B=3.05
 - OPTIONAL PANEL GROUND
 - 0 : WITHOUT PANEL GROUND
 - 3 : 3 SIDES PANEL GROUND
 - LED COLOR
 - 0 : WITHOUT LED
 - CONTACT AREA PLATING
 - 1 : 15u" GOLD PLATING
 - 2 : 30u" GOLD PLATING
 - 5 : 1u" GOLD FLASH PLATING

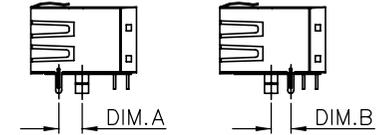

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection MM	product family GANGED MJACK	
ltr	ecn no	dr	date	tolerances unless otherwise specified		title
C				angles X.X±0.25		CAT 3 MULTI-PORTS TAB DOWN 1x4 WITH SHIELD, W/O LED
				X.XX±0.13	scale	
				X*±1"	X.XXX±0.05	sheet 4 of 4
		dr	WENDY CHEN	05/03/11	FCI	size A4
		enr	WENDY CHEN	05/03/11		dwg no 10118065
		chr	WENDY CHEN	05/03/11		type CUSTOMER Drawing
		appd	GARY HSIEH	05/03/11		
sheet index	revision sheet					