

# Photoelectrics

## Retro-reflective

### Type ER1830.PAS, DC, Metal-housing

CARLO GAVAZZI



- Range: 3 m
- Modulated infrared light
- Supply voltage: 10 to 40 VDC
- Output: 200 mA NPN or PNP
- Make and break switching function, LED indication
- Protection: Reverse polarity, short circuit, transients
- High immunity to ambient light
- Cable and plug versions



#### Product Description

Retro-reflective photoelectric switch with extended range up to 3 m. Easily adjustable sensitivity with 270° potentiometer. LED output indica-

tion. Short M18 metal housing for heavy duty applications. IP 67. Easy mounting. DC and AC types, fully protected.

#### Ordering Key

**ER 18 30 NPA S-1**

Type \_\_\_\_\_  
 Housing diameter \_\_\_\_\_  
 Range \_\_\_\_\_  
 Output type \_\_\_\_\_  
 Housing material \_\_\_\_\_  
 Connection type \_\_\_\_\_

#### Type Selection

Housing diameter	Rated operating dist. ( $S_n$ )	Ordering no. NPN/cable Make & break swit.	Ordering no. NPN/plug Make & break swit.	Ordering no. PNP/cable Make & break swit.	Ordering no. PNP/plug Make & break swit.
M18	3 m	ER 1830 NPAS	ER 1830 NPAS-1	ER 1830 PPAS	ER 1830 PPAS-1

#### Specifications


Rated operating dist. ( $S_n$ )	Up to 3 m Ref. reflector type ER4 $\varnothing$ 84 mm	Optical angle Light spot size Ambient light	$\pm 2.2^\circ$ 150 mm at 2 m Max. 10,000 lux
Sensitivity Adjustable	270° single turn pot. meter	Operating frequency ( $f$ )	Max. 120 Hz, light/dark ratio 1:2
Temperature drift	0.4%/K	Response time OFF-ON ( $t_{ON}$ ) ON-OFF ( $t_{OFF}$ )	$\leq 3.2$ ms $\leq 5$ ms
Hysteresis (H) (Differential travel)	3 to 20%	Indication function	Dark and light (complementary switch) LED, yellow
Rated operational volt. ( $U_B$ )	10 to 40 VDC (ripple included)	Environment	Oversupply category Pollution degree Degree of protection
Ripple ( $U_{pp}$ )	Max. 10%		III (IEC 60664/60664A; 60947-1) 3 (IEC 60664/60664A; 60947-1) IP 67 (IEC 60529; 60947-1)
Output current Continuous ( $I_e$ ) Short-time ( $I$ )	Max. 200 mA 200 mA, max. load capacity 100 nF	Temperature	-20° to +60°C (-4° to 140°F) -30° to +70°C (-22° to 158°F)
No load supply current ( $I_0$ )	Max. 20 mA @ 200 mA	Vibration	10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)
Min. operational current ( $I_m$ )	0.5 mA	Shock	2 x 1 m & 100 x 0.5 m (IEC 60068-2-32)
OFF-state current ( $I_s$ )	Max. 100 $\mu$ A	Dielectric voltage	600 VAC (IEC 60364-4-41)
Voltage drop ( $U_d$ )	Max. 2.5 V	Housing material	Nickel plated brass Luran®, black Polyester, black Nickel plated brass
Protection	Reverse polarity, short circuit overload, transients		
Transient voltage	1 kV/0.5 J		
Power ON delay ( $t_v$ )	Typ. 100 ms		
Light source	GaAlAs LED, 880 nm		
Light type	Infrared, modulated		

## Specifications (cont.)


### Connection

Cable	Grey, 2 m, 4 x 0.35 mm <sup>2</sup> , oilproof PVC
Plug	M12 x 1
Cables for plug (-1)	CON.1A-...series
<b>Weight</b>	
Cable version	140 g
Plug version	55 g
<b>Approvals</b>	UL, CSA
<b>CE-marking</b>	Yes


## Dimensions

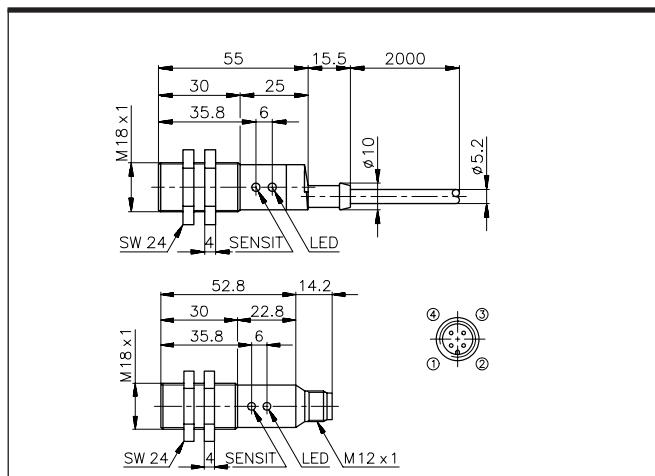


## Operation Diagram

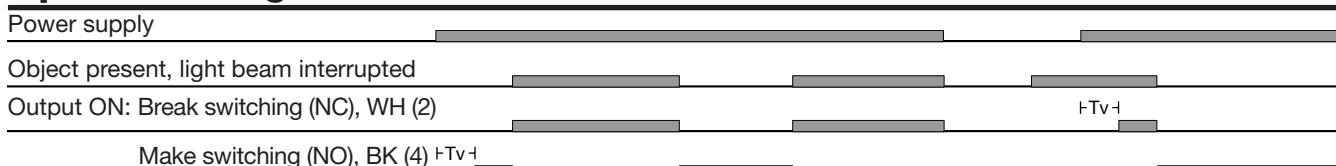

## Wiring Diagrams

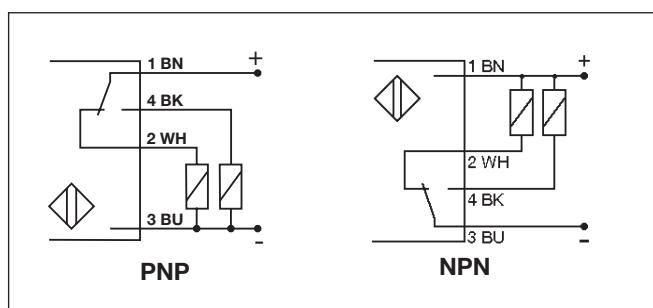

## Detection Diagram

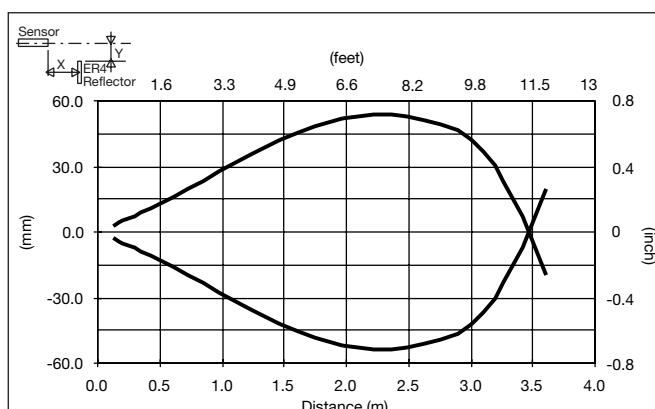

## Installation Hints

To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables	Relief of cable strain  Incorrect: cable pulled tight between two points. Correct: cable forms a loop.	Protection of the sensing face  The cable should not be pulled	Switch mounted on mobile carrier  Any repetitive flexing of the cable should be avoided
--	---	--	---

## Delivery Contents

- Photoelectric switch: ER1830
- 2 nuts
- Packaging: plastic bag

## Accessories

- Reflectors: ER series
- Connector type CON.1A..../CON.14NF.. series
- MB18A
- APA18-RAR

For further information refer to "Accessories"

Specifications are subject to change without notice (08.02.06)